

## A THz Dielectric Lens Antenna

Konstantinidis, Konstantinos; Feresidis, Alexandros; Constantinou, Constantinos; Gashinova, Marina; Hoare, Edward; Lancaster, Michael; Gardner, Peter

DOI:

[10.1109/APS.2016.7696453](https://doi.org/10.1109/APS.2016.7696453)

License:

None: All rights reserved

*Document Version*

Peer reviewed version

*Citation for published version (Harvard):*

Konstantinidis, K, Feresidis, A, Constantinou, C, Gashinova, M, Hoare, E, Lancaster, M & Gardner, P 2016, A THz Dielectric Lens Antenna. in *2016 IEEE International Symposium on Antennas and Propagation.*, 1407, Institute of Electrical and Electronics Engineers (IEEE), 2016 IEEE International Symposium on Antennas and Propagation , Fajardo, Puerto Rico, 26/06/16. <https://doi.org/10.1109/APS.2016.7696453>

[Link to publication on Research at Birmingham portal](#)

### **Publisher Rights Statement:**

(c) 2016 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other users, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted components of this work in other works.

### **General rights**

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

### **Take down policy**

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# A THz Dielectric Lens Antenna

Konstantinos Konstantinidis, Alexandros Feresidis, Costas Constantinou, Marina Gashinova, Edward Hoare, Michael Lancaster and Peter Gardner

School of Electronic, Electrical and Systems Engineering, University of Birmingham,  
Birmingham, B15 2TT, UK

[k.konstantinidis@bham.ac.uk](mailto:k.konstantinidis@bham.ac.uk), [a.feresidis@bham.ac.uk](mailto:a.feresidis@bham.ac.uk), [c.constantinou@bham.ac.uk](mailto:c.constantinou@bham.ac.uk), [m.s.gashinova@bham.ac.uk](mailto:m.s.gashinova@bham.ac.uk),  
[e.g.hoare@bham.ac.uk](mailto:e.g.hoare@bham.ac.uk), [m.j.lancaster@bham.ac.uk](mailto:m.j.lancaster@bham.ac.uk), [p.gardner@bham.ac.uk](mailto:p.gardner@bham.ac.uk)

**Abstract**— In this paper, a dielectric extended hemispherical lens antenna is presented. The antenna has been designed to produce highly directive beams at low THz frequencies. The feeding mechanism is a standard WR-3 rectangular waveguide fitted at the bottom of lens. The antenna is suitable for newly developed waveguide-based automotive radar and communications systems. The initial geometry has been based on ray optics and has then been optimized using full wave simulations (CST Microwave Studio™). Various dielectric materials have been considered and rexolite ( $\epsilon_r=2.53$ ) has been chosen for the particular design. The antenna's central frequency is 286 GHz with a maximum gain of 38.4 dBi and a 3dB bandwidth of around 40GHz.

**Keywords**— Lens antenna, terahertz, automotive radar applications

## I. INTRODUCTION

The TeraHertz (THz) region has attracted significant research interest over the past few years since it offers new opportunities for communications [1], sensing and imaging applications [2]. Current demands in automotive radar [3] and communication applications include high-resolution imaging, propagation through adverse environments with low signal attenuation and compact low-cost systems.

To satisfy these demands, highly directive antennas are needed. Current solutions in the submillimeter-wave band include horn and lens antennas. Various implementations of lens antennas have been reported operating at millimeter-wave [4] and submillimeter-wave bands [5-7] showing promising results. However, efficient illumination of lenses has been a challenge. Feeding techniques that have been employed thus far include dual slots and irises [8] as well as more broadband primary sources such as log-spiral and log-periodic [5-7]. However, these broadband solutions are not compatible with waveguide based systems.

In this contribution, a lens antenna is proposed, directly fed by an open-ended waveguide as a primary source. In this context, a dielectric extended hemispherical lens type has been chosen to enable integration with the feeding source. A range of dielectric materials with different electrical and mechanical properties have been considered. The proposed antenna achieves high gain and wide bandwidth performance which addresses the requirements of applications such as future THz communication systems and high resolution automotive radar systems. Moreover, the antenna is compatible for direct

integration with currently developed waveguide based communication and radar systems.

## II. ANTENNA DESIGN

The schematic of the proposed antenna configuration is shown in Fig.1. The structure is formed by a hemisphere of diameter  $D=40\text{mm}$  and a cylindrical extension layer below it with the same diameter and length  $L=18\text{mm}$ . The dielectric material is rexolite with  $\epsilon_r=2.53$  and  $\tan\delta$  from  $15\times 10^{-4}$  to  $40\times 10^{-4}$  at 120-550GHz. The lens shape has been chosen to allow integration of the feed antenna. The latter, is a WR-3 rectangular open-ended waveguide with aperture dimensions 0.8636mm and 0.4318mm.

As explained in [5], extended hemispherical lenses can be approximated with elliptical lenses. Thus, the length of the extension layer can be calculated using the defining equation for an ellipse such that the focal point lies at the bottom of the layer. This geometrical optics approach gives an initial estimation of the focal distance (length of the extension layer). Subsequently, an optimization of the dimensions  $D$  and  $L$  is carried out in CST Microwave Studio™, taking into account the effect of the primary source pattern.



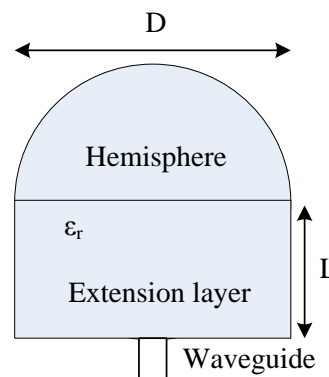



Fig. 1. Schematic of the proposed extended hemispherical dielectric lens antenna.

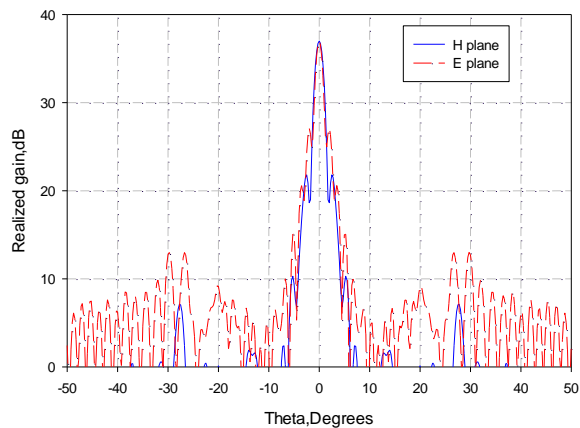

(a)

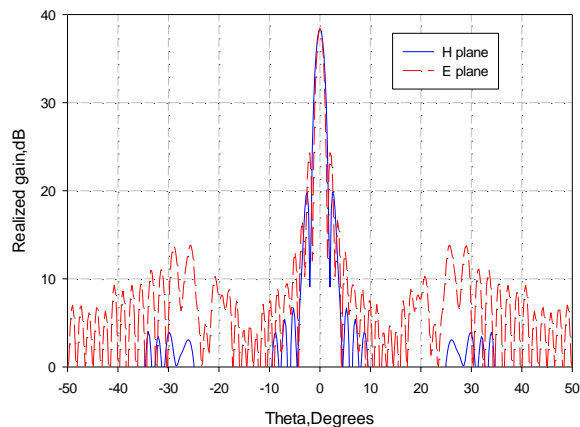

(b)

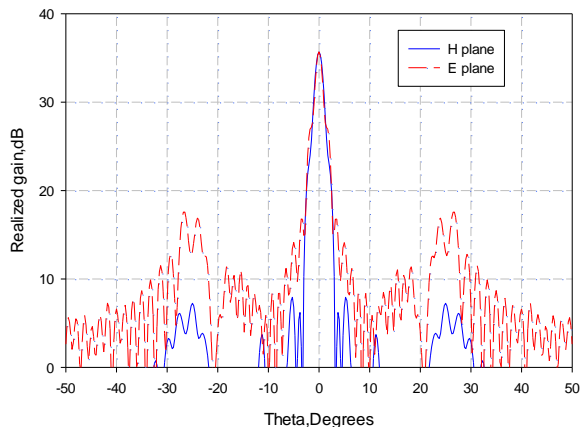

(c)

Fig. 2. H and E-plane radiation patterns for rexlite lens antenna at (a)  $f=275\text{GHz}$ , (b)  $f=286\text{GHz}$  and (c)  $f=305\text{GHz}$ .

A maximum realized gain of 38.4dB at 286GHz has been obtained with 40GHz 3dB bandwidth (14%). The matching over the operating bandwidth is below  $-10\text{dB}$ . The radiation patterns at three different frequencies are shown in Fig.2. It can be observed that the achieved 3dB beamwidths are  $1.3^\circ$

and  $1.6^\circ$  for E-plane and H-plane respectively. Due to the nature of the extended lens design sidelobes appear at higher angles ( $>20\text{deg}$ ) but the SLL remains below  $-18\text{dB}$ .

### III. FABRICATION

As mentioned in the introduction, various dielectric lenses (Teflon, Rexolite, PEEK etc.) have been considered which exhibit different mechanical properties. Among these, the material for the final antenna prototype will be selected subject to the best performance and mechanical stability. The prototype will be fabricated using facilities located at the University of Birmingham. CNC machining will be used for our proposed design.

### IV. CONCLUSIONS

A highly directive lens antenna operating at low THz frequencies has been proposed, with an integrated open-ended waveguide primary source. The design of the extended hemispherical lens has been based on ray optics and full wave simulations (CST Microwave Studio<sup>TM</sup>). Simulated results have been presented showing a maximum gain of 38.4 dBi at 286GHz with a 3dB bandwidth of around 40GHz. The achieved beamwidths (well below  $2^\circ$ ) show that the antenna can be incorporated to obtain a high-resolution imaging system. The final prototype will be measured and results will be presented at the conference.

### REFERENCES

- [1] R. Appleby and R. N. Anderton, "Millimeter-wave and submillimeterwave imaging for security and surveillance," *Proc. IEEE*, vol. 95, no. 8, pp. 1683–1690, Aug. 2007.
- [2] H.-J. Song and T. Nagatsuma, "Present and future of terahertz communications," *IEEE Trans. Terahertz Sci. Technol.*, vol. 1, no. 12, pp. 256–263, Sep. 2011.
- [3] D.R.Vizard, M. Gashinova, E. G. Hoare, M. Cherniakov, "Low THz automotive radar developments employing 300–600 GHz frequency extenders," *Radar Symposium (IRS)*, 16th International, pp.209-214, June 2015.
- [4] A. V. Boriskin, R. Sauleau, and A. I. Nosich, "Performance of hemielliptic dielectric lens antennas with optimal edge illumination," *IEEE Trans. Antennas and Propag.*, vol. 57, no. 7, pp. 2193-2198, 2009.
- [5] D. F. Filipovic, S. S. Gearhart, and G. M. Rebeiz, "Double-slot antennas on extended hemispherical and elliptical silicon dielectric lenses," *IEEE Trans. Microw. Theory Tech.*, vol. 41, no. 10, pp.1738–1749, Oct. 1993.
- [6] A. D. Semenov, H. Richter, H.-W. Hübers, B. Günther, A. Smirnov, K. S. Il'in, M. Siegel, and J. P. Karamarkovic, "Terahertz performance of integrated lens antennas with a hot-electron bolometer," *IEEE Trans. Antennas and Propag.*, vol. 55, no. 2, pp. 239–247, Feb. 2007.
- [7] J. Montero-de-Paz, E. Ugarte-Munoz, L.E. Garcia-Munoz, I. Camara Mayorga, D. Segovia-Vargas, "Meander Dipole Antenna to Increase CW THz Photomixing Emitted Power," *IEEE Trans. Antennas Propag.*, vol.62, no.9, pp.4868-4872, Sept.2014.
- [8] N. Llombart, G. Chattopadhyay, A. Skalare, and I. Mehdi, "Novel terahertz antenna based on asilicon lens fed by a leaky wave enhanced waveguide," *IEEE Trans. Antennas Propag.*, vol.59, no.6, pp.2160–2168, Jun. 2011.