

Dynamic modal parameters of an extremely lightweight structure using a gyroid core for bridge bearings

Sengsri, Pasakorn; Kaewunruen, Sakdirat

DOI:

[10.1007/978-981-19-7331-4_81](https://doi.org/10.1007/978-981-19-7331-4_81)

License:

None: All rights reserved

Document Version

Peer reviewed version

Citation for published version (Harvard):

Sengsri, P & Kaewunruen, S 2023, Dynamic modal parameters of an extremely lightweight structure using a gyroid core for bridge bearings. in G Geng, X Qian, LH Poh & SD Pang (eds), *Proceedings of The 17th East Asian-Pacific Conference on Structural Engineering and Construction, 2022: EASEC-17, Singapore*. 1 edn, Lecture Notes in Civil Engineering, vol. 302, Springer, Singapore, pp. 992–1000, The 17th East Asia-Pacific Conference on Structural Engineering and Construction (EASEC-17), Singapore, Singapore, 27/06/22. https://doi.org/10.1007/978-981-19-7331-4_81

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

This is a pre-copyedited version of a contribution published in Geng, G., Qian, X., Poh, L.H., Pang, S.D. (eds) *Proceedings of The 17th East Asian-Pacific Conference on Structural Engineering and Construction, 2022*. Lecture Notes in Civil Engineering, vol 302, published by Springer, Singapore. The definitive authenticated version is available online via: https://doi.org/10.1007/978-981-19-7331-4_81

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

Dynamic Modal Parameters of an Extremely Lightweight Structure using a Gyroid Core for Bridge Bearings

P. Sengsri^{1,*}, S. Kaewunruen¹

¹ *Laboratory for Track Engineering and Operations for Future Uncertainties (TOFU Lab), School of Engineering, The University of Birmingham, Edgbaston B15 2TT, Birmingham, United Kingdom email:*

pxs905@student.bham.ac.uk (P.S.)

**(Pasakorn Sengsri: pxs905@student.bham.ac.uk)*

Abstract:

This article reports an extremely lightweight structure used as a sandwich core for bridge bearings due to their superior mechanical properties, such as sound and vibration attenuation, rigidity, and energy absorption. The structure is based on triply periodic minimal surfaces (TPMS) conceived by observing the scales of butterflies' wings. The vibration behaviours of this innovative structure used in these bearings are not well-known and have never been fully investigated. Therefore, it is important to comprehend their vibration behaviours and also to identify dynamic modal parameters of these bridge bearings. Two gyroid sandwich panel finite element models with different unit cell sizes used as bridge bearings are examined with a computational method. The numerical investigation shows the vibration mechanisms and provides the dynamic modal parameters important in establishing relationships between its mechanical performance and geometry. Finite element predictions of the vibration behaviours of the two models with different unit cell sizes under free vibration provide good results. These results can be implemented to better generate informed lightweight structure designs for bridge bearings, which are subjected to different vibration conditions.

Keywords: bridge bearings; triply periodic minimal surfaces (TPMS); gyroid, vibration behaviours

1. Introduction

In contemporary bridge system, base isolation with elastomeric bearings also well-known as laminated rubber bearings (LRB) has been widely employed for attenuating the influence of seismic loads (vibrations) by reducing the loads transferred to the substructure [1-3]. These seismic loads can lead to the failure of a bridge and its components due to natural frequency resonance. The key functions of these bearings are not only to experience the compressive loads, transmitted from the deck, but also to facilitate deformations in horizontal and rotational direction. On the other hand, in some cases, LRBs, which are fixed between the superstructure and the substructure via bolted connections, are likely to face tensile displacements (uplift) induced by the rotation of a pier cap during earthquakes [4-6]. This results in internal local failures in the rubber as a well-known cavitation phenomenon [7-10].

In term of materials used in LRBs, they are a combination of rubber layers and steel shim plates which are laminated together alternately. Steel shim plate is a solid material that provides high vertical stiffness. Unlike rubber layer, it is a mainly incompressible material which offers high horizontal flexibility [11, 12]. Thus, LRBs possess an extremely high vertical stiffness, whilst remaining high horizontal flexibility which is needed to extend the period of a structure under seismic loading condition. This response is required for isolation of a civil engineering structure.

Nevertheless, there is an optional structure like a lattice structure which is possible to be used in an elastomeric bearing as a sandwich-structured composite, in order to show better mechanical properties than common structures provide currently, due to their high-performance and weight ratio. Lattice sandwich structures do not only offer benefits in lightweight, but also vibration attenuation, superior energy absorption, as well as thermal dissipation when compared to general structures (foam and honeycomb sandwich structures) [13-18]. Therefore, the lattice structures could potentially be the ideal core of sandwich structures for bridge bearing applications.

A common sandwich plate consists of a lightweight core connected to two relatively thin, dense, high-strength and stiffness face sheets. In this work, the idea of a novel extremely lightweight structure called a porous structure is inspired by butterfly wings due to their specific design with several features [19, 20]. The wings consist of a lightweight structure core with an infinitely connected triply periodic minimal surface (TPMS) geometry called gyroid and reinforced on their outer areas with a series of ribs. Thus, the architecture of the porous structure used in butterfly wings can lead to a well-known porous structure (gyroid), which is a member of a TPMS family [21]. TPMSs are minimal surfaces with mean curvature of zero and periodic structures in three coordinate directions [22].

In term of great benefits of using a TPMS structure, a TPMS can locally minimise its region (uniform stress distribution) and free it of self-intersections [23]. Additionally, it possesses high manufacturability of additive manufacturing (AM) process because of its geometrical characteristics [24-26]. Gyroid structures can be designed, but it is difficult to produce them until the advantages of AM technologies [27]. The main advantage of AM is that it allows the design and fabrication of more complex components by their features than conventional manufacturing processes [28, 29], with a certain benefit in enhancing performances of components [30, 31].

As aforementioned, bridge bearings can fail in resonance when the frequency of a periodically applied load is close or equal to a natural frequency of a bridge system on which it behaves. Hence, it is crucial to comprehend the dynamic modal parameters of bridge bearings for designing and predicting their vibration responses. Lots of research works have been performed on the stability of laminated rubber bearings imposed to vertical and horizontal loading [32-34], the buckling load capacity of LRBs [35], and also the instability of LRBs influenced by cavitation [36]. There are our previous works on the development of a common bridge bearing using lattice structures, which focus on their compressive and modal behaviour under compression and vibration, respectively [37-42].

On the other hand, to the best of our knowledge, there is no existing research on identifying dynamic modal parameters of an extremely lightweight structure with a gyroid core for bridge bearing applications. As these parameters obtained, an effective seismic base isolation system can be designed. In this paper, we aim to determine the dynamic modal parameters of the gyroid sandwich panel used as a bridge bearing (BB) subjected to free vibration, in terms of natural frequencies, mode shapes through numerical modal analysis.

2. Materials and methods

2.1 Design of an extremely lightweight structure

A computer-aided design (CAD) model of the gyroid structure is created by using Rhino 6 software. The software allows users to design a gyroid structure by plotting an implicit function presented in the following equation (1). This function reproduces a structure closely similar to the three-dimensional pattern of the gyroid topology.

$$\sin x * \cos y + \sin y * \cos z + \sin z * \cos x = 0. \quad (1)$$

The unit cell is 10 mm in size and the gyroid cell is patterned on the 3D space to the desired core shape (3x3x2 unit cells) with a width of 30 mm, a length of 30 mm, and a height of 20 mm. As presented in Fig. 1, it illustrates the gyroid structure with a unit cell size of 10 mm and a thickness of 0.75 mm created with Rhino 6 software. The unit cell size is one of the parameters investigated in this paper.

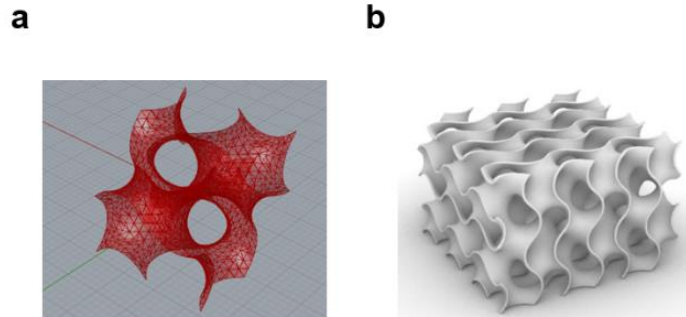


Figure 1: A gyroid core with a unit cell size of 10 mm. (a) 10 mm gyroid unit cell (b) 30 x 30 x 20 mm array.

The two metallic facets with a thickness of 1.5 mm are connected to the upper and lower surface of the gyroid core, illustrated in Fig 2. The connections are designed by employing Siemens NX 12.0 software.

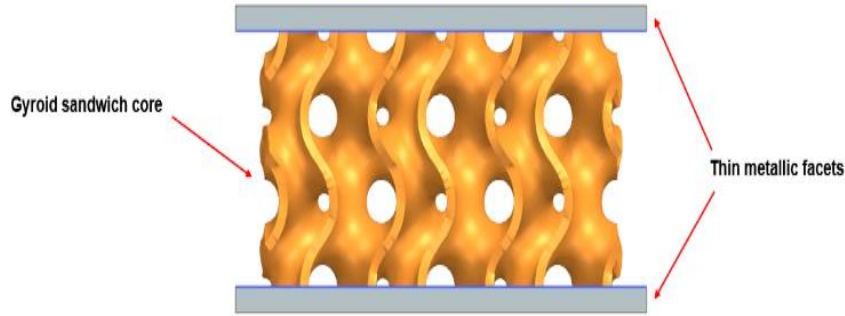


Figure 2: Gyroid sandwich panel used as a bridge bearing.

2.2 Numerical modal analysis

Modal analysis is a tool which is one of the most widely used methods to characterise and identify the properties of systems in the frequency domain. In this paper, we aim to determine the dynamic modal parameters of extremely lightweight structure components with a gyroid core, in terms of fundamental frequencies and mode shapes via finite element (FE) modal analysis. The dynamic equation under free vibration for a single degree of freedom system without damping can be described as [43].

$$[m]\{\ddot{s}\} + [k]\{s\} = \{0\}. \quad (2)$$

Free vibration solution is mathematically considered as a non-trivial solution. It should take the form as:

$$\{s\} = \{S\} \sin \omega t. \quad (3)$$

By substituting Eq. (3) into Eq. (2), the equation becomes a simple algebraic matrix equation:

$$([K] - \omega^2[M])\{S\} = \{0\}. \quad (4)$$

As $\{S\}$ cannot be zero in Eq. (4), therefore:

$$\det|[K] - \omega^2[M]| = \{0\}. \quad (5)$$

Where, ω^2 represents the eigenvalue which identifies the natural frequency of the system and $\{S\}$ denotes the eigenvector which identifies the mode shape of the system.

Two gyroid sandwich panel finite element models with different unit cell sizes are generated and analysed using Siemens NX 12.0 software. Modal analysis is proposed as the mode of analysis employed to investigate these panels. For gyroid core, TPU which is used in the core for the simulations is a rubber-like material (hyperplastic) with very high bulk modulus but having low shear modulus. Whilst two thin steel facets are assigned to be linear elastic materials. Their properties are shown in the following table. Also, the materials are meshed using 238,813 and 210,819 tetra10 elements with 0.5 and 1 mesh size for 10 mm and 20 mm unit cell size presented in Fig 3, respectively. Simulations are employed to reveal the dynamic modal behaviours and to conduct a parametric study. It is important to mention that the two gyroid sandwich panels in this paper are modelled with a small scale to reduce computational time.

Table 1: Engineering properties of a gyroid sandwich core and two steel facets.

Properties	TPU	Steel	Unit
Density	1,235	7,829	kg/m ³
Poisson's ratio	0.39	0.29	-
Young's modulus	2,491	206,940	MPa
Yield strength	21.00	137.90	MPa
Ultimate tensile strength	38.40	276.00	MPa

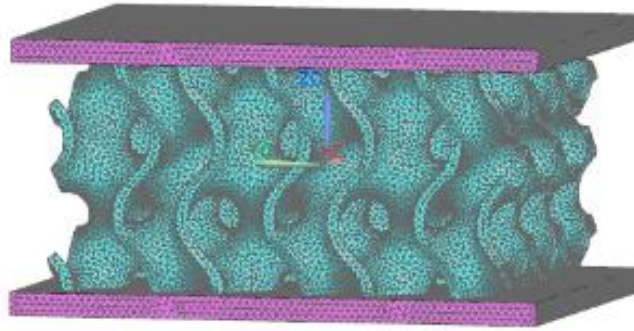
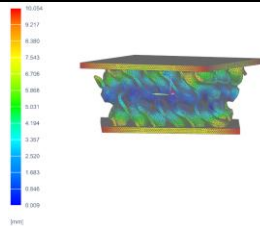
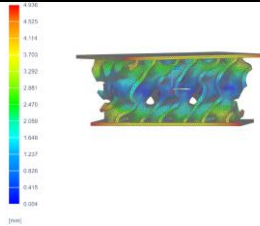
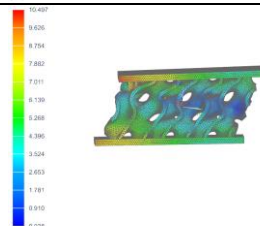
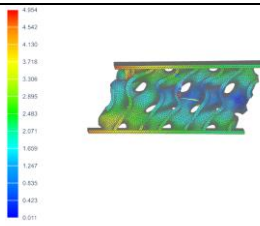
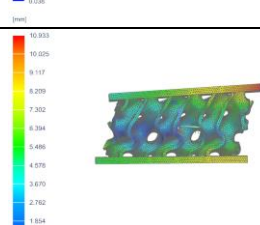
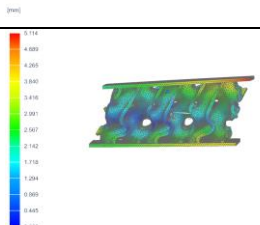
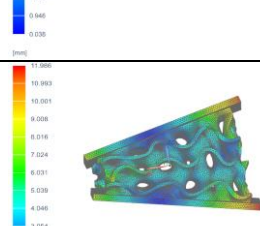
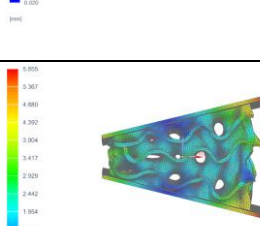


Figure 3: Finite element model of a gyroid sandwich panel for modal analysis.

3. Results and discussion

The dynamic modal parameters of a gyroid sandwich panel for bridge bearing applications are well-known as natural frequencies and mode shapes without damping. These parameters are obtained from finite element modal analysis. A comparison of dynamic modal parameters of both gyroid sandwich panels with two different unit cell sizes (10 mm and 20 mm) extracted from the numerical modal analysis is presented in Table 2. The natural frequencies and mode shapes from both analyses are compared for the first four modes. The results show that, for both panels, the first torsional deformation pattern is generated in the first mode, whilst the first and the second rollover deformation patterns are produced in the second and third mode, as well as the first uplift deformation occurred in the fourth mode. It is obvious that the difference of natural frequencies of FE models of gyroid sandwich panels with different unit cell sizes exhibits quite large discrepancies. On the other hand, the natural frequencies of the gyroid sandwich panel made of 10 mm unit cells are approximately 1.4 times the other ones of the gyroid sandwich panel with 20 mm unit cell size. This is because natural frequencies depend on geometry property and mass of a material.

Table 2: Results of modal analysis for both gyroid sandwich panels.

Mode No.	FE model with 10 mm cell size Mode shape	Frequency (Hz)	FE model with 20 mm cell size Mode shape	Frequency (Hz)	$\Delta\%$	behaviour
1		421.17		292.48	30.56	Torsion
2		603.25		407.86	32.90	Rollover
3		613.60		415.07	32.35	Rollover
4		649.63		446.71	31.24	Uplift

4. Conclusions

Modal analysis is completely conducted to examine the dynamic behaviours of two gyroid sandwich panels with different unit cell sizes for bridge bearing applications. These panels consist of a gyroid core confined between two thin steel facets which provide higher stiffness of their structure. The results show that the first natural torsion mode obviously controls the first resonant mode of vibration for both panels. Also, the gyroid sandwich panel with a bigger unit cell size can better experience vibrations than a one with a smaller one as the decreasing natural frequencies of all the modes. These insights will be useful to the performance benchmarking of bridge bearings as well as the development of the vibration-based design approach to predict their modal dynamic characteristics. Further work of model validation should be performed for practical use in reality.

5. Acknowledgements

The first author wishes to thank Royal Thai Government for his PhD Scholarship at the University of Birmingham. The last author wishes to gratefully acknowledge the Japan Society for Promotion of Science (JSPS) for his JSPS Invitation Research Fellowship (Long-term), Grant No L15701, at the Track Dynamics Laboratory, Railway Technical Research Institute and at Concrete Laboratory, the University of Tokyo, Tokyo, Japan. The JSPS financially supports this work as part of the research project, entitled “Smart and reliable railway

infrastructure.” Special thanks to European Commission for H2020-MSCA-RISE Project No. 691135 “RIS-EN: Rail Infrastructure Systems Engineering Net-work” (www.risen2rail.eu). Partial support from H2020 Shift2Rail Project No 730849 (S-Code) is acknowledged. In addition, the sponsorships and assistance from LORAM, Network Rail, RSSB (Rail Safety and Standard Board, UK) are highly appreciated.

REFERENCES

- 1 Crocker, M. J. Lee, G.C., Kitane, Y., Buckle, I.G. Literature review of the observed performance of seismically isolated bridges. In: Research progress and accomplishments: multidisciplinary center for earthquake engineering research, 51–62, (2001).
- 2 Chen, W.F., Duan, L. Bridge engineering: seismic design (principles and applications in engineering). CRC Press, Boca Raton, (2003).
- 3 Tubaldi, E., Dall'Asta, A. A design method for seismically isolated bridges with abutment restraint. *Eng Struct.*, 33(3), 786–795, (2011).
- 4 Mitoulis, S.A. Uplift of elastomeric bearings in isolated bridges subjected to longitudinal seismic excitations, *Struct. Infrastruct. Eng. Maint. Manage. Life- Cycle Design Perform*, 11(12), (2015).
- 5 European Committee for Standardization (ECS) Structural bearings—Part 3: elastomeric bearings (EN 1337-3). ECS, Brussels, (2005a).
- 6 European Committee for Standardization (ECS) Anti-seismic devices (EN 15129). ECS, Brussels, (2009).
- 7 Gent, A.N., Lindley, P.B. Internal rupture of bonded rubber cylinders in tension, *Proc. R. Soc. Lond. A Math. Phys. Eng. Sci.*, 249(1257), 195–205, 1959.
- 8 Gent, A.N. Cavitation in rubber: a cautionary tale, *Rubber Chem. Technol.*, 63, 49–53, (1990).
- 9 Pond, T.J. Cavitation in bonded natural rubber cylinders repeatedly loaded in tension, *J. Nat Rubber Res.*, 10(1), 14–25, (1995).
- 10 Dorfmann, A., Burtcher, S.L. Aspects of cavitation damage in seismic bearings, *J. Struct. Eng.*, 126, 573–579, (2000).
- 11 Derham, C. J., Kelly, J. M. and Thomas, A. G. Nonlinear Natural Rubber Bearings for Seismic Isolation. *Nuclear Engineering and Design*, 84(3), 417–428, (1985).
- 12 Warn, G. P. and Weisman, J. Parametric Finite Element Investigation of The Critical Load Capacity of Elastomeric Strip Bearings. *Engineering Structures*, 33(12), 3509–3515, (2011).
- 13 Gibson, L.J., Ashby, M.F. *Cellular solids: structure and properties* (Cambridge university press), (1999)
- 14 Evans, A.G., Hutchinson, J.W., Fleck, N.A., Ashby, M.F. and Wadley, H.N.G. The topological design of multifunctional cellular metals *Prog. Mater. Sci.*, 46, 309–27, (2001).
- 15 Xue, Z. and Hutchinson, J.W. A comparative study of impulse-resistant metal sandwich plates *Int. J. Impact Eng.*, 30, 1283–305, (2004).
- 16 Kim, T., Hodson, H.P. and Lu, T.J. Fluid-flow and endwall heat-transfer characteristics of an ultralight lattice-frame material *Int. J. Heat. Mass. Tran.*, 47, 1129–1140, (2004).
- 17 Wang, J., Lu, T.J., Woodhouse, J., Langley, R.S. and Evans, J. Sound transmission through lightweight double-leaf partitions: theoretical modelling *J. Sound. Vib.*, 286, 817–847, (2005).
- 18 Liu, T., Deng, Z.C. and Lu, T.J. Bi-functional optimization of actively cooled, pressurized hollow sandwich cylinders with prismatic cores *J. Mech. Phys. Solids*, 55, 2565–2602, (2007).
- 19 Combes, S.A., Daniel, T.L. Flexural stiffness in insect wings I. Scaling and the influence of wing venation. *J. Exp. Biol.*, 206, 2979–2987, (2003).
- 20 Stepan, S.J. Flexural stiffness patterns of butterfly wings (Papilionoidea). *J. Res. Lepid*, 35, 61–77, (2000).
- 21 Michielsen, K., Stavenga, D.G. Gyroid cuticular structures in butterfly wing scales: Biological photonic crystals. *J. R. Soc. Interface*, 5, 85–94, (2007).
- 22 Rajagopalan, S., Robb, R.A. Schwarz meets Schwann: design and fabrication of biomorphic and durataxic tissue engineering scaffolds, *Med. Image Anal.*, 10(5), 693–712, (2006).
- 23 Schoen, A.H. *Infinite Periodic Minimal Surfaces without Self-Intersections*; NASA Electronics Research Center: Cambridge, MA, USA, (1970).
- 24 Yan, C., Hao, L., Hussein, A., Bubb, S.L., Young, P. and Raymont, D. Evaluation of lightweight AlSi10Mg periodic cellular lattice structures fabricated via direct metal laser sintering, *J. Mater. Process. Technol.*, 214(4), 856–864, (2014).
- 25 Yan, C., Hao, L., Hussein, A. and Young, P. Ti-6Al-4V triply periodic minimal surface structures for bone implants fabricated via selective laser melting, *J. Mech. Behav. Biomed. Mater.*, 51, 61–73, (2015).

- 26 Yang, L., Yan, C. and Shi, Y. Fracture Mechanism Analysis of Schoen gyroid Cellular Structures Manufactured by Selective Laser Melting, Solid Freeform Fabrication Symposium, 2319–2325, (2017).
- 27 Marco, P and Alberto, O. Nature-Inspired, Ultra-Lightweight Structures with Gyroid Cores Produced by Additive Manufacturing and Reinforced by Unidirectional Carbon Fiber Ribs. *Materials.*, 12, 4134, (2019).
- 28 Wang, S.X.X., Zhou, S., Xu, W., Leary, M., Choong, P., Qian, M., Brandt, M. and Xie, Y.M. Topological design and additive manufacturing of porous metals for bone scaffolds and orthopaedic implants: A review. *Biomaterials*, 83, 127–141, (2016).
- 29 Pelanconi, M., Barbato, M., Zavattoni, S., Vignoles, G.L. and Ortona, A. Thermal design, optimization and additive manufacturing of ceramic regular structures to maximize the radiative heat transfer. *Mater. Des.*, 163, (2019).
- 30 Klahn, B.L.C. and Meboldt, M. Design strategies for the process of additive manufacturing. *Procedia CIRP*, 36, 230–235, (2015).
- 31 Yang, S. and Zhao, Y.F. Additive manufacturing-enabled design theory and methodology: A critical review. *Int. J. Adv. Manuf. Technol.*, 80, 327–342, (2015).
- 32 Pinarbasi, S. and Akyuz, U. Investigation of Compressive Stiffness of Elastomeric Bearings, 6th International Congress on Advances in Civil Engineering, Bogazici University, Istanbul, Turkey, October 6–8, (2004).
- 33 Kumar, M. Analysis of Elastomeric Bearings in Compression. Unpublish Doctoral Dissertation, University at Buffalo, United State, (2012).
- 34 Osgoodei, P. M., Tait, M. J. and Konstantinidis, D. Three Dimensional Finite Element Analysis of Circular Fiber Reinforced Elastomeric Bearings Under Compression. *Composite Structure*. 108, 191–204, (2014).
- 35 Chang, C. H. Modeling of Laminated Rubber Bearings Using an Analytical Stiffness Matrix. *International Journal of Solids and Structures.*, 39(24), 6055–6078, (2002).
- 36 Kelly, J. M. and Marsico, M. R. 2013. Tension Buckling in Rubber Bearings Affected by Cavitation. *Engineering Structures*. 56, 656–663, (2013).
- 37 Sengsri, P., Kaewunruen, S. Local Failure Modes and Critical Buckling Loads of a Meta-Functional Auxetic Sandwich Core for Composite Bridge Bearing Applications. *Appl. Sci.* 2021, 11, 10844. <https://doi.org/10.3390/app112210844>.
- 38 Sengsri, P., Kaewunruen, S. Additive manufacturing meta-functional composites for engineered bridge bearings: A review. *Constr. Build. Mater.* 2020, 262, 120535.
- 39 Sengsri, P., Fu, H., Kaewunruen, S. Mechanical Properties and Energy-Absorption Capability of a 3D-Printed TPMS Sandwich Lattice Model for Meta-Functional Composite Bridge Bearing Applications. *J. Compos. Sci.* 2022, 6(3), 71. <https://doi.org/10.3390/jcs6030071>.
- 40 Sengsri, P., Marsico, R. M., Kaewunruen, S. IOP Conference Series: Mater. Sci. Eng. 603 02206.
- 41 Sengsri, P., Baniotopoulos, C., Kaewunruen, S. 2020, Engineered model for the numerical investigation into vibration characteristics of a novel bridge bearing under free-free and fixed boundary condition. in EURO DYN 2020 XI International Conference on Structural Dynamics: EURO DYN 2020. European Association for Structural Dynamics, EURO DYN 2020 XI International Conference on Structural Dynamics, Athens, Greece, 23/11/20.
- 42 Sengsri, P., Kaewunruen, S. Compression behaviour of an extremely lightweight structure with a gyroid core used for bridge bearings. *Materials Today: Proceedings*. 2022, 2214–7853. <https://doi.org/10.1016/j.matpr.2022.04.703>.
- 43 He, J. and Fu, Z. F. Modal Analysis. 1st Edition. Butterworth Heinemann, (2001).