

3D numerical simulation of a lab-scale pressurized dense fluidized bed focussing on the effect of the particle-particle restitution coefficient and particle-wall boundary conditions

Fede, Pascal; Olivier, Simonin; Ingram, Andrew

DOI:
[10.1016/j.ces.2015.11.016](https://doi.org/10.1016/j.ces.2015.11.016)

License:
Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

Document Version
Peer reviewed version

Citation for published version (Harvard):
Fede, P, Olivier, S & Ingram, A 2016, '3D numerical simulation of a lab-scale pressurized dense fluidized bed focussing on the effect of the particle-particle restitution coefficient and particle-wall boundary conditions', *Chemical Engineering Science*, vol. 142, pp. 215-235. <https://doi.org/10.1016/j.ces.2015.11.016>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:
Eligibility for repository: checked 10/02/16

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.


If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

Download date: 19. Apr. 2024

Author's Accepted Manuscript

3D numerical simulation of a lab-scale pressurized dense fluidized bed focussing on the effect of the particle-particle restitution coefficient and particle-wall boundary conditions

Fede Pascal, Simonin Olivier, Ingram Andrew

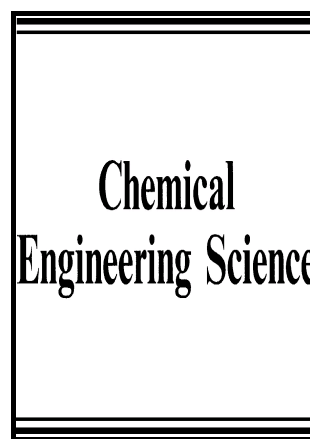

www.elsevier.com/locate/ces

PII: S0009-2509(15)00733-2
DOI: <http://dx.doi.org/10.1016/j.ces.2015.11.016>
Reference: CES12674

To appear in: *Chemical Engineering Science*

Received date: 23 July 2015
Revised date: 20 October 2015
Accepted date: 5 November 2015

Cite this article as: Fede Pascal, Simonin Olivier and Ingram Andrew, 3D numerical simulation of a lab-scale pressurized dense fluidized bed focussing on the effect of the particle-particle restitution coefficient and particle-wall boundary conditions, *Chemical Engineering Science*, <http://dx.doi.org/10.1016/j.ces.2015.11.016>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting galley proof before it is published in its final citable form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain

3D numerical simulation of a lab-scale pressurized dense fluidized bed focussing on the effect of the particle-particle restitution coefficient and particle-wall boundary conditions

Fede Pascal^{a,b,*}, Simonin Olivier^{a,b}, Ingram Andrew^c

^a*Université de Toulouse ; INPT, UPS ; Institut de Mécanique des Fluides de Toulouse
Allée Camille Soula, FR-31400 Toulouse, France*

^b*CNRS ; IMFT ; FR-31400 Toulouse, France*

^c*School of Chemical Engineering; University of Birmingham; Birmingham, UK*

Abstract

3D numerical simulations of dense pressurized fluidized bed are presented. The numerical prediction of the mean vertical solid velocity are compared with experimental data obtained from Positron Emission Particle Tracking. The results show that in the core of the reactor the numerical simulations are in accordance with the experimental data. The time-averaged particle velocity field exhibits a large-scale toroidal (donut shape) circulation loop. Two families of boundary conditions for the solid phase are used: rough wall boundary conditions (Johnson and Jackson (1987) and No-slip) and smooth wall boundary conditions (Sakiz and Simonin (1999) and Free-slip). Rough wall boundary conditions may lead to larger values of bed height with flat smooth wall boundary conditions and are in better agreement with the experimental data in the near-wall region. No-slip or Johnson and Jack-

*Corresponding author.

Email address: `pascal.fede@imft.fr` (Fede Pascal)

son's wall boundary conditions, with sufficiently large value of the specular coefficient ($\phi \geq 0.1$), lead to two counter rotating macroscopic toroidal loops whereas with smooth wall boundary conditions only one large macroscopic loop is observed. The effect of the particle-particle restitution coefficient on the dynamic behaviour of fluidized bed is analysed. Decreasing the restitution coefficient tends to increase the formation of bubbles and, consequently, to reduce the bed expansion.

Keywords: Gas-solid flows, dense fluidized bed, CFD, wall boundary conditions, PEPT

1. Introduction

Pressurized gas-solid fluidized beds are used in a wide range of industrial applications such as coal combustion, catalytic polymerization, uranium fluorination and biomass pyrolysis. The mathematical modelling and numerical simulation of such industrial fluidized beds are challenging because many complex phenomena are in competition (particle-turbulence interaction, particle-particle and particle-wall collisions, heat and mass transfers) and because of the large-scale geometry of the industrial facilities compared to the characteristic length scales of the fluid and particles.

The development of numerical modelling of dense fluidized bed hydrodynamics started about three decades ago (Gidaspow, 1994). Basically two approaches can be used for the numerical prediction of dense fluidized bed hydrodynamic: the Euler-Lagrange approach, where filtered Navier-Stokes equations are solved for the gas and Discrete Element Method (DEM) for the particles (Kaneko et al., 1999; Deen et al., 2007; Di Renzo and Di Maio,

2007; Olaofe et al., 2014), or the multi-fluid approach where all phases are treated as continuum media. In the DEM approach, the Lagrangian trajectories of each particle are computed and the inter-particle collisions are treated in a deterministic manner. Even if DEM can be used up to a few millions of particles (Capecelatro and Desjardins, 2013) it cannot yet be used for most of industrial full-scale simulations. Typically, to simulate the lab-scale fluidized bed studied in the present paper, the whole number of particles to be accounted for in the frame of the DEM approach is about 10 millions while for an industrial pressurized gas-phase olefin polymerization reactor (Neau et al., 2013) the corresponding number of particles should be larger than 40 billions. In contrast, nowadays it is possible to perform realistic 3D simulations of industrial configurations by using an unsteady Eulerian reactive multi-fluid approach. Numerical simulations of industrial-, pilot- and lab-scale pressurized reactors were carried out with such an approach showing a good agreement with the qualitative knowledge of the process but detailed experimental validations were missing (Gobin et al., 2003; Fede et al., 2010; Rokkam et al., 2010; Fede et al., 2011a,b; Rokkam et al., 2013). Indeed, the Euler-Euler approach is extensively used for circulating or dense gas-solid fluidized bed predictions but the model assessment is commonly restricted to a comparison between the predicted and the experimentally measured pressure drop, or local mass flux. Obviously such restrictions come from the complexity of doing measurements inside a dense particulate phase. Recently, an original experimental technique, called Positron Emission Particle Tracking (PEPT), has emerged allowing to measure the trajectory of an individual particle moving in dense particulate flows. From the trajectory it is possi-

ble to compute the particle dispersion properties and then to perform fruitful comparison between experiments and numerical prediction (Link et al., 2008; Fede et al., 2009).

The present paper shows numerical results from Euler-Euler simulations carried out with the mathematical model proposed by Balzer et al. (1995) (see Appendix A). Such a modelling approach involves several assumptions however there is no empirical constant in the model. In fact the model, like all Lagrangian or Eulerian ones, requires the value of the normal restitution coefficient for particle-particle collision. Precisely speaking, the normal restitution coefficient is not an adjustable parameter because it represents the physical loss of kinetic energy during a collision. However, as this parameter is very difficult to measure for a practical powder (Foerster et al., 1994; Sommerfeld and Huber, 1999), it can be seen as a parameter of the modelling approach (Goldschmidt et al., 2001). In the present paper a comprehensive analysis is made for showing how the normal restitution coefficient may modify the macroscopic properties of a dense fluidized bed.

In the framework of the kinetic theory of dry granular flows, several wall boundary conditions for the solid phase have been derived for rough or flat walls, with or without frictional effect (Hui et al., 1984; Johnson and Jackson, 1987; Jenkins and Richman, 1986; Jenkins, 1992; Jenkins and Louge, 1997; Sakiz and Simonin, 1999; Konan et al., 2006b; Schneiderbauer et al., 2012; Soleimani et al., 2015). For the numerical simulation of a circulating or dense fluidized bed the most popular wall boundary conditions are the ones derived by Johnson and Jackson (1987) which introduced a specular coefficient that is an ad-hoc parameter depending on the large-scale roughness of

the walls but which cannot be measured directly from experiment, in contrast to the normal restitution coefficient (Sommerfeld and Huber, 1999). In the case of dilute gas-solid flow in a pipe, Benyahia et al. (2005) showed that the specular coefficient must be very small for correct agreement with experimental data. Li et al. (2010) analysed the effect of the specular coefficient on the predicted 2D and 3D hydrodynamic of dense bubbling fluidized beds. Unfortunately, the 3D study considered only small values of the specular coefficient ranging from 0.0 to 0.05. In parallel, wall boundary conditions have been derived for flat frictional walls (Jenkins and Richman, 1986; Jenkins, 1992; Louge, 1994; Jenkins and Louge, 1997; Sakiz and Simonin, 1999; Schneiderbauer et al., 2012). The development and validation of such boundary conditions were mainly performed by comparison with predictions from the Discrete Element Method (DEM).

It is important to note that the original Johnson and Jackson boundary conditions do not account for particle/wall frictional effects. In contrast, the more recent boundary conditions of Konan et al. (2006a,b) and Soleimani et al. (2015) extend different approaches, originally developed for smooth walls, by using the idea of virtual wall angle of Sommerfeld and Huber (1999).

The paper is organized as follows. The second section gives an overview of the experiment where the PEPT technique was used for obtaining local statistics of the solid inside the fluidized bed. The boundary conditions for the solid phase employed in the present study are described in the third section. The description of the numerical simulation, in terms of equations, mesh, material properties and statistics are given in the fourth section. The results are presented in section five and, finally, an analysis is carried out

Table 1: Gas and particle material properties given for the operating conditions $P_g = 12$ bar and $T = 298$ K.

Nitrogen	Density, ρ_g [kg/m ³]	13.595
	Viscosity, μ_g [Pa.s]	1.7982×10^{-5}
	Fluidization velocity, V_f [m/s]	0.32
Particles	Density, ρ_p [kg/m ³]	740
	Mean diameter, d_p [μ m]	875
	Solid Mass, m_s [kg]	2.5

in section six on the specific dependence of the simulation results on the particle-particle collision restitution coefficient and on the solid wall boundary conditions. Conclusions and prospects are given in the last section.

2. Experimental overview

This study concerns the hydrodynamics of an isothermal gas-solid dense fluidized bed in a low-scale pressurized axisymmetric reactor with a cylindrical column of internal radius $R = 77$ mm and height 1 074 mm (see Figure 1). The vertical distance between the horizontal gas fluidization distributor plate and the widening (with an enlargement half-angle of 10°) is 924 mm. Nitrogen enters at the distribution plate with a fluidization velocity $V_f = 0.32$ m/s and the pressure in the fluidized bed is 12 bar. The gas and solid material properties are given in Table 1. The particle phase is almost monodisperse with a median diameter of $875 \mu\text{m}$ and a material density of 740 kg/m^3 .

Positron Emission Particle Tracking (PEPT) is an experimental technique

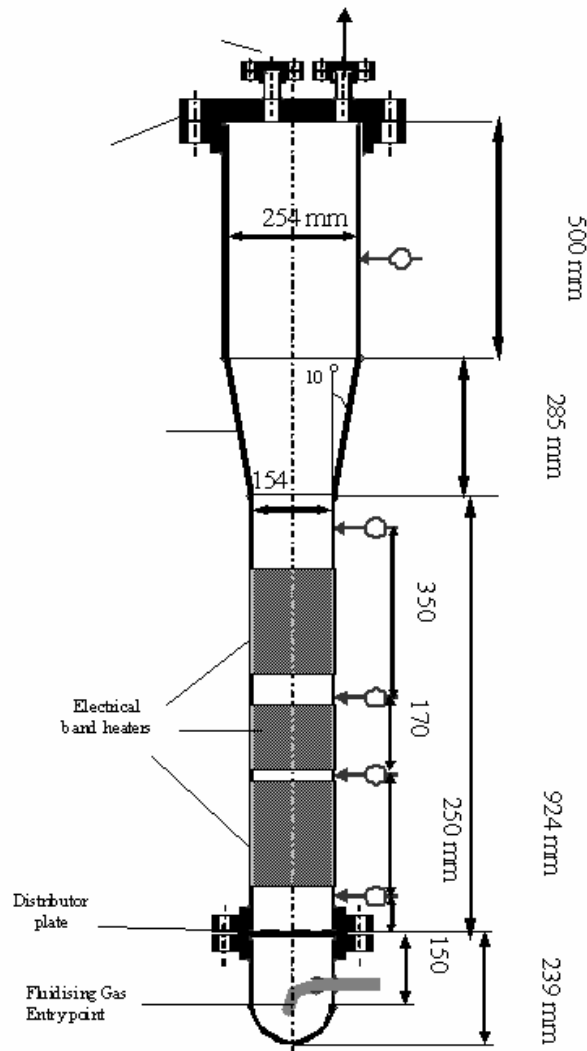


Figure 1: Geometry of the low-scale fluidized bed.

developed at the University of Birmingham derived from the medical imaging method Positron Emission Tomography (PET) (Stellema et al., 1998). PEPT enables the tracking of a single particle in an opaque or otherwise impenetrable system such as dense fluidized beds. PEPT tracers are labelled with a

specific class of radioisotope which decays through the emission of a positron (β^+ decay). The emitted positron collides with a local electron, annihilates and produces a pair of back-to-back gamma photons. The usual isotope is Fluorine-18; this has excellent characteristics of decaying solely through β^+ , is easily manufactured by Helium-3 ion irradiation of oxygen-containing materials such as water or silica, and has a half-life of about 2 hours giving a good balance between activity and tracer life (4-6 hours). Tracers will have decayed by a factor greater than 4000 within 24 hours so there is no concern for equipment contamination.

Adapted PET cameras are used to detect the photon pairs and generate the so-called Lines Of Responses (LORs) that connect each pair. Triangulation of successive LORs should give the point in space where the annihilation occurred - the tracer location. In practice there is some corruption of data due to a mixture of Compton scattering of photons and incorrect pairing. The algorithm developed at Birmingham over many years (Ingram et al., 2007a) eliminates corrupted data thorough a statistical procedure; typically aliquots of 200-500 LORs will be used to compute the tracer location to within 0.5-1.0 mm at a frequency between 100 and 1000 Hz. The reliability and frequency of location depends on many factors such as tracer activity, tracer velocity, size of rig and mass of material to be penetrated by the photons.

Historically, the PEPT facility has progressed from the home-made multi-wire positron camera in 1984, through the ADAC Forte Medical PET camera in 1999 (giving a 20-fold increase in data frequency) to more recent developments of the flexible, modular PEPT system built from the components of redundant PET scanners. This latter development has enabled exploitation of

the technique for larger and/or more complicated geometries (Ingram et al., 2007b).

During the experimental data acquisition N_e particle positions have been recorded. The time-averaged Eulerian solid velocity, volume-averaged in a cell $C(\mathbf{x})$, centred at \mathbf{x} , is defined by

$$\mathbf{U}_p(\mathbf{x}) = \frac{\sum_{k=1}^{N_e} \mathbf{u}_p(t_k) \Delta t_k \delta_k}{\sum_{k=1}^{N_e} \Delta t_k \delta_k} \quad \text{with} \quad \delta_k = \begin{cases} 1 & \text{if } \mathbf{x}_p(t_k) \in C(\mathbf{x}) \\ 0 & \text{otherwise} \end{cases} \quad (1)$$

where $\mathbf{x}_p(t_k)$ is the instantaneous particle position at the time t_k . Link et al. (2008) proposed the following expression for the time-averaged Eulerian solid velocity

$$\mathbf{U}_p(\mathbf{x}) = \frac{\sum_{k=1}^{N_e} \mathbf{u}_p(t_k) \delta_k}{\sum_{k=1}^{N_e} \delta_k}. \quad (2)$$

These equations give the same result when Δt is uniform so the difference in weighting is not related to the time spent in the cell, rather the activity of the tracer at the time it passes through. At the start of the experiment, the tracer is strong so will be seen more frequently and Eq. (2), being a count average of observed velocities, would unfairly weight in favor of early data. Equation (1) is effectively averaging according to distance traveled through the cell so will be unaffected by tracer activity. Actually for a given data frequency, slow particles will be observed more times (and vice-versa for rapid particle) so both expressions weight according to time spent in the cell and will give more emphasis to the slower particles. This analysis remains valid

if the data frequency is varying but not correlated with the instantaneous particle velocity, meaning that the tracer activity and the sensor system is unaffected by the particle motion. In the following, even if we did not find significant differences between the two definitions, Eq. (1) is used to compute the time-averaged Eulerian solid velocity in a cell because this definition is more consistent with the one of the time-averaged Eulerian solid velocity in the frame of the statistical approach.

It must be noticed that the accuracy of the time-averaged Eulerian solid velocity defined by either Eq. (1) or Eq. (2) depends on the cell size. Indeed, if the number of events in a cell is too small, the computed Eulerian solid velocity becomes unrepresentative. Conversely, if the cell is too large, the number of events is large enough with respect to the statistical averaging but the spatial accuracy of the local information is lost due to spatial averaging (Fede et al., 2009). But, owing to the axisymmetry of the reactor geometry, the time-averaged flow may be assumed to obey cylindrical symmetry. So, the spatial averaging of the time-averaged variables can be performed in the azimuthal direction without loss of accuracy. Consequently, the effective volume-averaging cell $C(r)$, in Eq. (1) and Eq. (2), is a cylindrical ring, of radius r , centered on the symmetry axis.

3. Wall Boundary conditions

The Euler-Euler modelling approach is a hybrid two-fluid approach (Morioka and Nakajima, 1987) where separate transport equations (mass, momentum, and fluctuating kinetic energy) are solved for each phase and coupled through interphase transfer terms. The transport equations are derived by phase en-

semble averaging weighted by the gas density for the continuous phase and by using kinetic theory of granular flows supplemented by fluid effects for the dispersed phase (Balzer et al., 1995). In the present study the gas flow is considered as laminar and, for the solid phase stress tensor modeling, a viscosity assumption is used (Boëlle et al., 1995) with a transport equation for the random particle kinetic energy q_p^2 (the so-called granular temperature in the frame of dry granular kinetic theory). The set of equations used in the numerical simulations are given in Appendix A.

In the following we present the wall boundary conditions with the focus on the solid phase. According to the modelling approach, boundary conditions are needed for the solid phase mean wall-tangential velocity component, $U_{p,\tau}$, and for the particle random kinetic energy, q_p^2 . Assuming no deposition, the solid phase mean wall-normal velocity component is equal to zero.

3.1. Wall boundary conditions for the gas

The fluid flow is laminar so the true wall boundary condition for the gas is No-slip. However, such a condition is questionable in practice because, according to the strong coupling with the solid flow, the gas velocity No-slip condition is correctly taken into account in CFD simulation only if the wall-distance of the first internal computational node is of the order of the particle diameter. This question remains an open issue requiring further investigation but we assume that the particle-wall interaction is the dominant effect in the present study.

3.2. Smooth wall boundary conditions

In the framework of the kinetic theory of granular media several propositions have been made to take into account inelastic, frictional particle collision with smooth wall in the derivation of the solid wall boundary conditions (Hui et al., 1984; Johnson and Jackson, 1987; Jenkins and Richman, 1986; Jenkins, 1992; Jenkins and Louge, 1997; Sakiz and Simonin, 1999; Schneiderbauer et al., 2012). Considering collisions of inelastic rigid spheres with a flat frictional wall involving always sliding at the contact point (the "small friction/all sliding" limit), the boundary conditions may be written as,

$$\left(\nu_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = \mu_w \frac{2}{3} [q_p^2]_{wall}, \quad (3)$$

$$\left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} = g(e_w, \mu_w) \left(\frac{2}{3} [q_p^2]_{wall} \right)^{3/2} \quad (4)$$

where $\nu_p = \nu_p^{col} + \nu_p^{kin}$ is the viscosity, $K_p = K_p^{kin} + K_p^{col}$ the diffusivity of the dispersed phase and $[q_p^2]_{wall}$ the random kinetic energy of the particles in contact with the wall, namely at a distance $d_p/2$ (see Appendix B). The unit normal to the wall vector, \mathbf{n} , is directed into the flow and wall-tangential mean particle velocity component, $U_{p,\tau}$, is defined by $\mathbf{U}_{p,\tau} = |\mathbf{U}_p - (\mathbf{U}_p \cdot \mathbf{n}) \cdot \mathbf{n}|$. The coefficient e_w is the particle-wall normal restitution coefficient and μ_w the particle-wall dynamic friction coefficient. In Eq. (4), $g(e_w, \mu_w)$ is an algebraic function which depends on both parameters. For example, Jenkins (1992) derived the following expression,

$$g(e_w, \mu_w) = \frac{3}{8} \left[(1 - e_w) - \frac{7}{2} (1 + e_w) \mu_w^2 \right]. \quad (5)$$

In the frame of the "small friction/all sliding" limit, He and Simonin (1993) derived separated wall boundary conditions for the particle kinetic stress tensor components assuming a half Gaussian distribution of the incident particle

velocities. Sakiz and Simonin (1999) show that these boundary conditions are in very good agreement with DEM simulation for vertical particle-laden channel flows. Assuming that the particle kinetic normal stress can be approximated by $\langle u'_n u'_n \rangle \approx 2/3 q_p^2$, the approach proposed by He and Simonin (1993) leads to,

$$g(e_w, \mu_w) = \frac{1 - e_w}{\sqrt{e_w}} \sqrt{\frac{2}{\pi}} [1 - \mu_w^2] . \quad (6)$$

We should point out that in dilute flows, especially in the near wall regions, the particle kinetic stress tensor may be strongly anisotropic (Rogers and Eaton, 1990; He and Simonin, 1993) and the assumption $\langle u'_n u'_n \rangle \approx 2/3 q_p^2$ may overestimate the friction at the wall. According to equation (3) and (4) written in the frame of the proposed modelling approach, it is important to note for the discussion about the simulation results, that:

- on one hand, the particle wall shear stress increases linearly with the random kinetic energy and the dynamic friction coefficient;
- on the other hand, the particle wall random kinetic energy flux is always directed towards the wall (for realistic dynamic friction coefficient values : $\mu_w < 1$) and represents the dissipation by particle-wall inelastic collisions ($e_w < 1$).

For frictionless ($\mu_w = 0$) and elastic bouncing at the walls ($e_w = 1$), Eq. (3) and Eq. (4) lead to

$$\left(\nu_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = 0 , \quad (7)$$

$$\left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} = 0 . \quad (8)$$

This set of equations corresponds to Free-slip wall boundary conditions that can be interpreted as pure elastic frictionless (i.e. specular) rebounds of spherical particles on a flat wall.

3.3. Rough wall boundary conditions

As shown by Sommerfeld and Huber (1999) the roughness can play a very important role and should be probably accounted for in numerical simulation. In the literature, the most popular wall boundary conditions for the solid phase in fluidized beds were proposed by Johnson and Jackson (1987):

$$\left(\nu_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = \frac{\phi \pi [g_0]_{wall} [U_{p,\tau}]_{wall} \sqrt{\frac{2}{3} [q_p^2]_{wall}}}{2\sqrt{3}\alpha_p^{max}} \quad (9)$$

$$\begin{aligned} \left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} &= -\frac{\phi \pi [g_0]_{wall} [U_{p,\tau}]_{wall} \sqrt{\frac{2}{3} [q_p^2]_{wall}}}{2\sqrt{3}\alpha_p^{max}} \quad (10) \\ &+ \frac{\sqrt{3}\pi [g_0]_{wall} (1 - e_w^2)}{4\alpha_p^{max}} \left(\frac{2}{3} [q_p^2]_{wall} \right)^{3/2} \end{aligned}$$

as for the random particle kinetic energy, $[U_{p,\tau}]_{wall}$ is the tangential component of the mean velocity of the particles in contact with the wall. The parameter ϕ is the specularity coefficient ranging from zero, for specular bouncing, to unity, for pure diffuse rebounds. Between these two extrema, the value of the specularity coefficient is questionable. The specularity coefficient was first introduced by Hui et al. (1984) to measure the fraction of collisions that transfer a significant amount of tangential momentum to the wall.

According to equation (9) and (10), it is important to note for the discussion about the simulation results that:

- on one hand, the particle wall shear stress increases linearly with the

square root of the random kinetic energy and with the mean tangential velocity of the particle in contact with the wall;

- on the other hand, the particle wall random kinetic energy flux is the sum of two contributions with opposite effects, the first one is always directed towards the flow and represents the transfer of kinetic energy from the mean tangential solid motion towards the random wall-normal particle motion due to the roughness effect (Konan et al., 2006b) while the second one is always directed towards the wall and represents the dissipation by particle-wall inelastic collisions ($e_w < 1$).

One can notice that for $\phi \rightarrow 0$, Eqs. (9) & (10) lead to flat frictionless wall boundary conditions corresponding to Eqs. (3) & (4) with

$$\mu_w = 0, \quad (11)$$

$$g(e_w, \mu_w) = \frac{\sqrt{3}\pi [g_0]_{wall} (1 - e_w^2)}{4\alpha_p^{max}}. \quad (12)$$

By analysing experimental data, Fede et al. (2009) observed that in the considered fluidized bed the mean particle velocity at the wall is nearly equal to zero. Imposing such a condition may look questionable but in fact we believe that the No-slip boundary conditions could represent accurately the effect of elastic bouncing of spherical particles on a very rough wall.

Indeed, according to the derivation of Navier-Stokes wall boundary conditions in the frame of kinetic theory of rarefied gases (Cercignani, 1975) it must be emphasized that the No-slip condition is a result of the isotropic re-emission of the molecules from the wall and does not imply a zero velocity for any single bouncing molecules. By analogy, it is expected that the No-slip boundary condition for solid particles should represent the limit case of

very rough walls leading to pure diffuse rebounds. In contrast to the kinetic theory of gases, where molecules are re-emitted at the temperature of the walls, the solid particles only exchange with the wall a part of their kinetic energy depending on the bouncing model. In particular, if we assume elastic frictionless bouncing on the rough wall, we should have zero flux of kinetic energy from the particulate flow to the wall. Hence, the proposed elastic No-slip particle boundary conditions used in the paper reads

$$[U_{p,\tau}]_{wall} = 0 , \quad (13)$$

$$\left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} = 0 . \quad (14)$$

To account for non-elastic particle bouncing we modified the boundary condition for the random kinetic energy by extension of Johnson & Jackson's boundary condition as

$$\left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} = \frac{\sqrt{3}\pi [g_0]_{wall} (1 - e_w^2)}{4\alpha_p^{max}} \left(\frac{2}{3} [q_p^2]_{wall} \right)^{3/2} . \quad (15)$$

4. Numerical simulation

Three dimensional numerical simulations of the fluidized bed have been carried out using an Eulerian n-fluid modeling approach for gas-solid turbulent polydisperse flows developed and implemented by IMFT (Institut de Mécanique des Fluides de Toulouse) in the NEPTUNE_CFD V1.08@Tlse version. NEPTUNE_CFD is a multiphase flow software developed in the framework of the NEPTUNE project, financially supported by CEA (Commissariat à l'Énergie Atomique), EDF (Électricité de France), IRSN (Institut de Radioprotection et de Sûreté Nucléaire) and AREVA-NP. The numerical

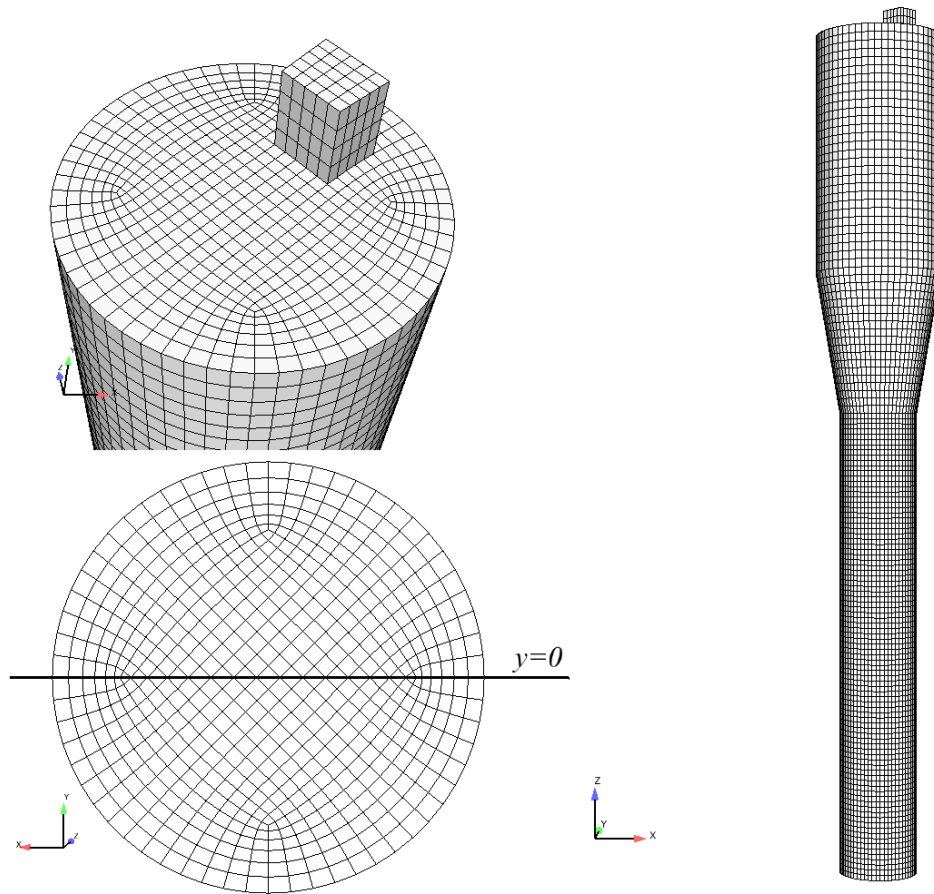


Figure 2: Mesh geometry with 80 245 hexahedra. Right: front view, top-left: the chimney and bottom-left: distribution plate.

solver has been developed for High Performance Computing (Neau et al., 2010, 2013).

4.1. Geometry and mesh

Figure 2 shows a front view, a bottom-view (fluidization grid) and a top-view of the reactor. The mesh has been constructed using the O-grid technique in order to have nearly uniform cells in horizontal section and contains 80 245 hexahedra.

In recent years the issue of the effect of the cell size on the numerical solution of fluidized bed has been addressed (Agrawal et al., 2001; Heynderickx et al., 2004; Igci et al., 2008; Parmentier et al., 2012; Ozel et al., 2013; Sundaresan et al., 2013). As discussed by Sundaresan et al. (2013) the appropriate length scale for the grid resolution is still an open issue and seems to be dependent on the given gas-solid flow configuration. However, Parmentier et al. (2008) carried out an analysis of the effect of the grid resolution on dense fluidized beds with flow conditions roughly similar to the present study. Following Parmentier et al. (2008) the effect of the mesh is negligible when Δ^* is smaller than 0.04 where $\Delta^* = \Delta / (2R) \sqrt{L / \tau_p^{St} V_f}$ with $\tau_p^{St} = \rho_p d_p^2 / 18 \mu_g$ the particle response time based on Stokes law. In this numerical simulation, the typical cell size is about $\Delta = 5 \times 10^{-3}$ m, which leads to $\Delta^* = 0.017$ which is small compared to the limiting value. More, Fede et al. (2009) analyzed the effect of the mesh on the present geometry. They showed that a finer mesh, with 440 962 cells and a typical cell size $\Delta = 2.5 \times 10^{-3}$ m, does not significantly change the results.

The distribution plate is an inlet for the gas with an imposed velocity corresponding to the one of experiments (see Table 1). The imposed surfacic gas velocity is uniformly distributed on the fluidization grid. For the particles, the distribution plate is a wall. The chimney, located at the top of the fluidized bed, is a free outlet for the gas and for the particles as well.

4.2. Physical parameters

All physical parameters of the particles and the gas are the same as in experiments. The normal restitution coefficient of particle-particle collisions ranges between 1.00 and 0.80. For analysing the effect of the wall boundary

Table 2: Summary of numerical simulations differing by particle-particle and particle-wall parameters. It must be noticed that $\mu_w = 0.0$ corresponds to Free-slip boundary conditions for the mean particle velocity.

e_c	ϕ	e_w	μ_w
1.00, 0.98, 0.95, 0.90, 0.80	-	1.00	0.00
1.00, 0.98, 0.95, 0.90, 0.80	-	1.00	0.00
0.90	0.01, 0.10, 1.00, No-slip	1.00	-
	0.01, 0.10, 1.00, No-slip	0.86	-
	-	1.00	0.00, 0.02, 0.30
	-	0.75	0.00, 0.02, 0.30

conditions on the hydrodynamics of the fluidized bed several particle-wall restitution and friction coefficients have been considered. As mentioned by Benyahia et al. (2005), realistic values of such coefficients are rarely available in the literature. Table 2 gathers all parameters of the boundary conditions. For the restitution and friction coefficients the values are close to those from the experiments of Sommerfeld and Huber (1999). Additional values have been used for the analysis.

4.3. Statistics and simulation organization

The numerical simulations are performed during 240 seconds of experimental time. A first period of 120 seconds is needed to establish steady state and then time-averaged statistics are computed during the remaining 120

seconds. The time-averaged solid volume fraction is then defined by

$$\bar{\alpha}_p(\mathbf{x}) = \frac{\sum_n \alpha_p(\mathbf{x}, t_n) \Delta t_n}{\sum_n \Delta t_n} \quad (16)$$

and the variance of the solid volume fraction by

$$\overline{\alpha'_p(\mathbf{x})^2} = \frac{\sum_n [\alpha_p(\mathbf{x}, t_n) - \bar{\alpha}_p(\mathbf{x})]^2 \Delta t_n}{\sum_n \Delta t_n} \quad (17)$$

For the gas and particle velocities the time-averaging is weighted by the solid volume fraction. Then the time-averaged Eulerian particle phase velocity becomes

$$\bar{U}_{p,i}(\mathbf{x}) = \frac{\sum_n \alpha_p(\mathbf{x}, t_n) U_{p,i}(\mathbf{x}, t_n) \Delta t_n}{\sum_n \alpha_p(\mathbf{x}, t_n) \Delta t_n}. \quad (18)$$

The radial profiles are extracted at $z/R = 1.50$ & 3.45 . These specific horizontal positions correspond to the locations where the experimental error is minimal (Fede et al., 2009).

The time-averaged results over 120 seconds obey the cylindrical symmetry sufficiently that the fields and radial profiles of these variables are nearly identical for any given vertical plane crossing the symmetry axis. In the following, the chosen vertical plane of reference is defined by $y = 0$ in the simulation mesh (see Figure 2).

5. Presentation of the results

5.1. Vertical distribution of time-averaged gas pressure and solid volume fraction

The effects of the solid wall boundary conditions and of the particle-particle restitution coefficient on the vertical distribution of time-averaged

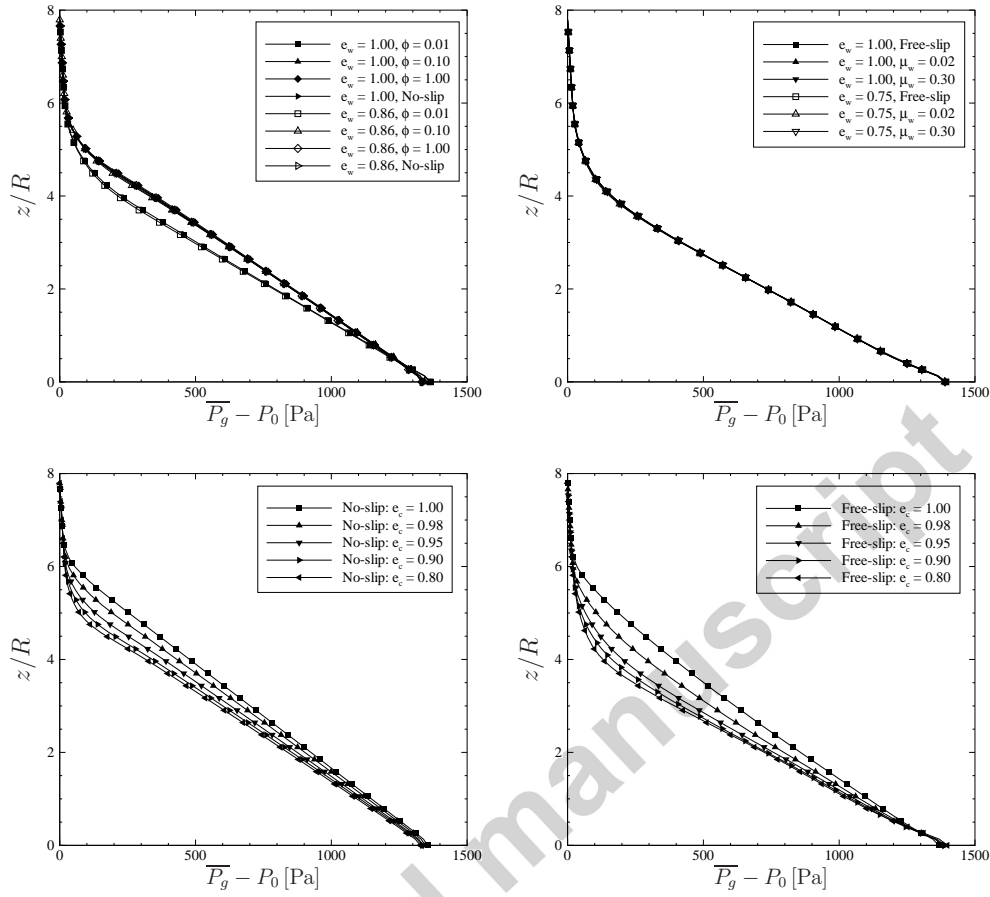


Figure 3: Vertical distribution of the time-averaged gas pressure measured at the wall. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

gas pressure measured at the wall are shown by Figure 3. As expected, the vertical profile of the gas pressure has two parts. Above the fluidized bed, $z/R > 6$, the profile is linear corresponding to the hydrostatic law for the

gas. At the bottom of the reactor, $z/R < 3.5$, the vertical profile of the gas pressure is also linear but with a different slope due to the weight of the solid. The bed height is located in the intermediate zone $3.5 < z/R < 6$ also called free-board zone. Figure 3 shows that the smooth wall boundary conditions have no significant effect on the vertical distribution of time-averaged gas pressure for a given value of particle-particle restitution coefficient ($e_c = 0.9$).

Figure 3 shows that the particle-particle restitution coefficient may have a strong effect on the vertical distribution of the gas pressure profiles. As e_c increases the bed height is increasing and the free-board seems narrowed.

These trends are also observed with the vertical distribution of the time-averaged solid volume fraction measured at the wall, $\overline{\alpha}_p$. Indeed, Figure 4 shows that the smooth wall boundary conditions do not affect the vertical distribution of the solid in the reactor. The solid volume fraction increases almost linearly between the fluidization grid and $z/R \approx 0.5$. Then the solid volume fraction is uniform for $0.5 < z/R < 3.5$. Finally the solid volume fraction decreases linearly for $z/R > 3.5$. Different behaviour is observed for rough wall boundary conditions. Here, the solid volume fraction increases linearly from the bottom of the reactor up to $z/R \approx 4.5$ and decreases linearly for $z/R > 4.5$. The profiles between the No-slip and Free-slip cases are obtained with intermediate specular coefficient. As expected, for the smallest value of the specular coefficient ($\phi = 0.01$) the vertical profile of $\overline{\alpha}_p$ is similar to the one obtained with the smooth wall boundary conditions.

As shown by Figure 4, the normal restitution coefficient significantly modifies the vertical distribution of the solid inside the reactor for the given boundary conditions. The shapes of the vertical profiles are conserved (and

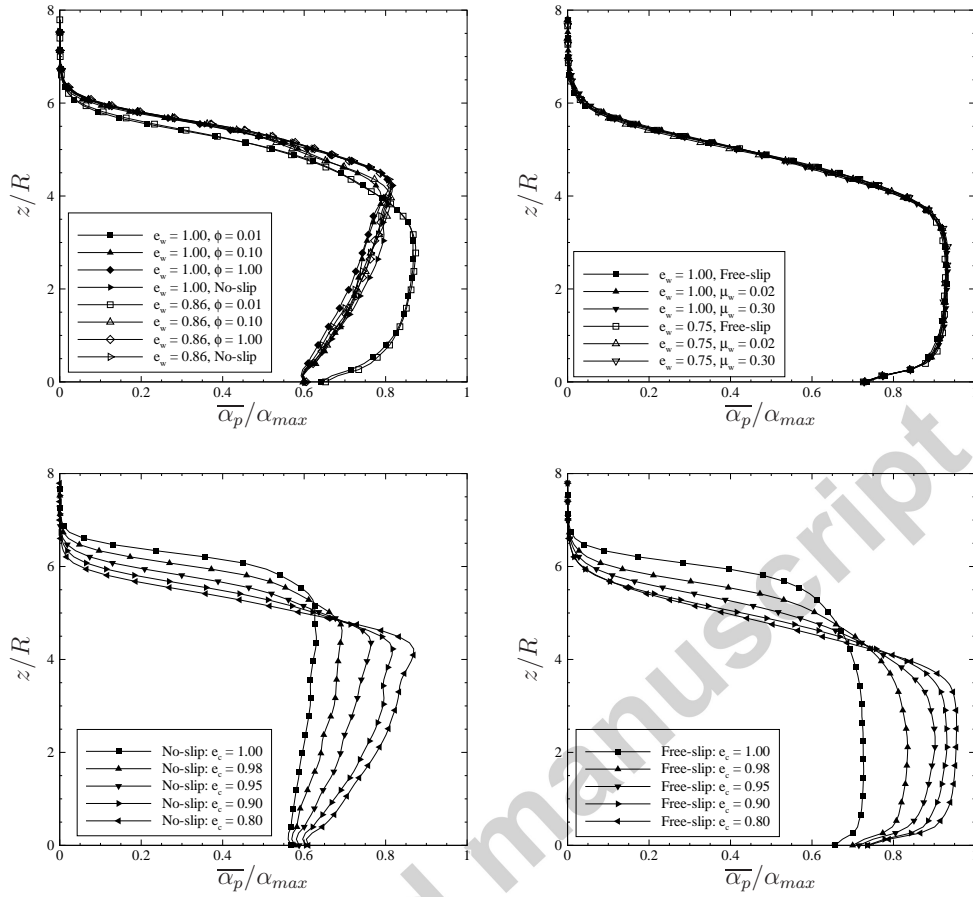


Figure 4: Vertical distribution of the time-averaged solid volume fraction measured at the wall. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions. The maximum particle solid volume fraction is $\alpha_{max} = 0.64$.

seem to be controlled by the nature of the wall boundary conditions) but when e_c increases the time averaged solid volume fraction decreases.

The bed height, H_{bed} , is computed as the intersection of the two linear

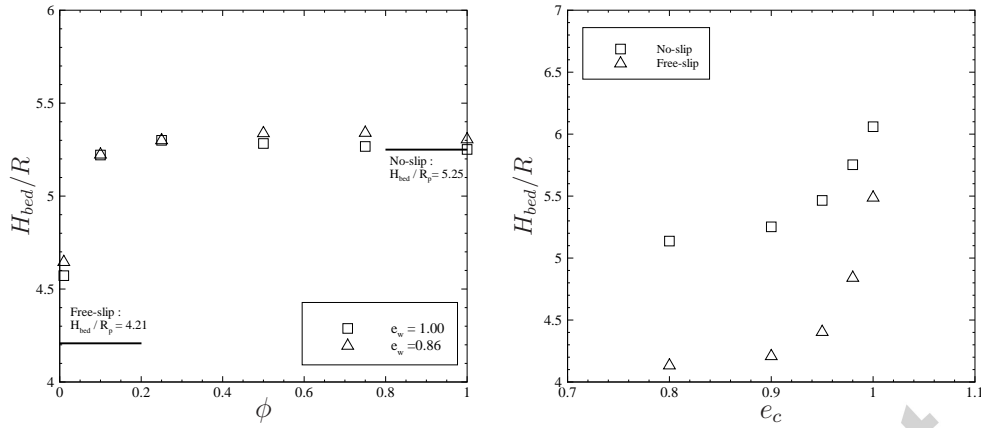


Figure 5: Height of the bed with respect to the specularity coefficient and particle-particle restitution coefficient.

zones previously defined for the vertical profile of the time-averaged gas pressure distribution (Figure 3). The bed height with respect to the specularity coefficient is shown by Figure 5. For $\phi \rightarrow 0$ the bed height given by rough wall boundary conditions moves towards the value given by the Free-slip conditions ($H_{bed}/R = 4.21$). As expected from section 3.3, for $\phi \rightarrow 1$ the bed height tends towards the value obtained with No-slip wall boundary conditions ($H_{bed}/R = 5.25$). As already shown by Fede et al. (2009) the bed height obtained with No-slip wall boundary conditions is larger than the one obtained with Free-slip.

5.2. Time-averaged vertical velocities and solid mass flux

Figures 6 & 7 show the time-averaged Eulerian solid velocity measured in the experiment and in the numerical simulations. The profiles are extracted at two heights $z/R = 1.50$ (Figure 6) and $z/R = 3.45$ (Figure 7). In the centre of the reactor the experiment exhibits an upward mean solid velocity

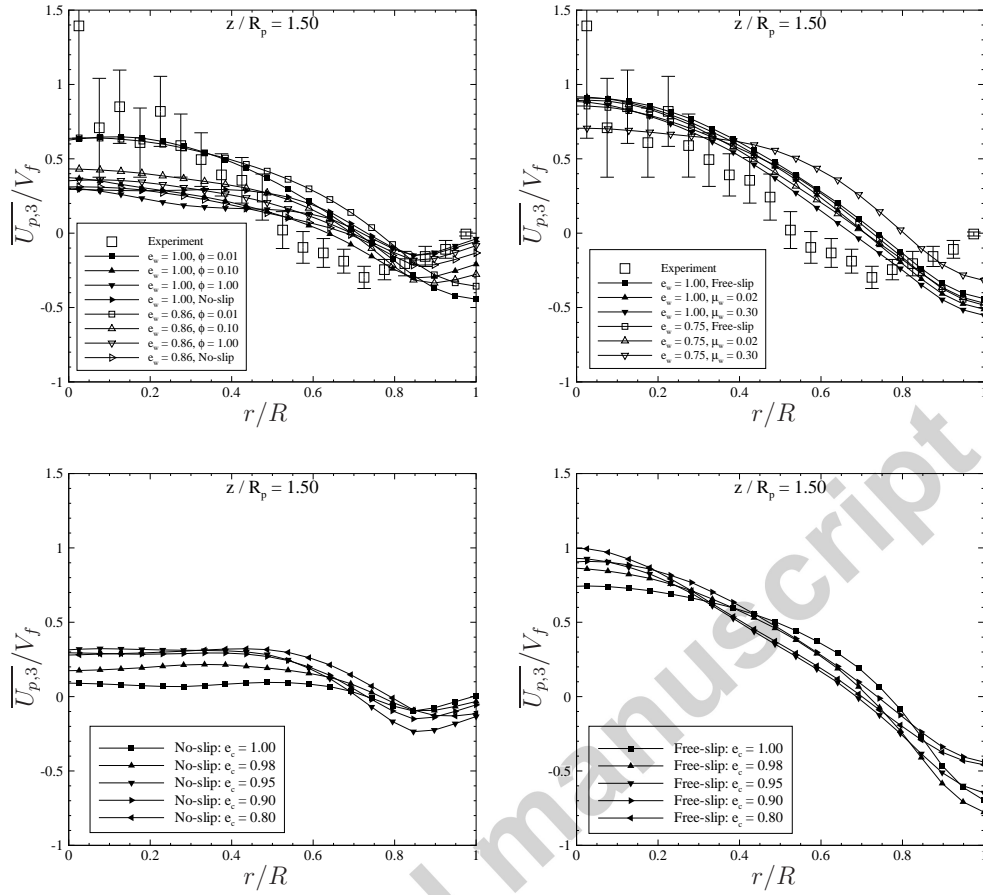


Figure 6: Radial profiles of time-averaged solid vertical velocity normalized by the fluidization velocity measured at $z/R = 1.50$. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

between $0 < r/R < 0.5$ at $z/R = 1.50$ and between $0 < r/R < 0.6$ at $z/R = 3.45$. In this region the mean solid upward velocity is increasing between the two heights. Close to the wall a downward solid flow is observed.

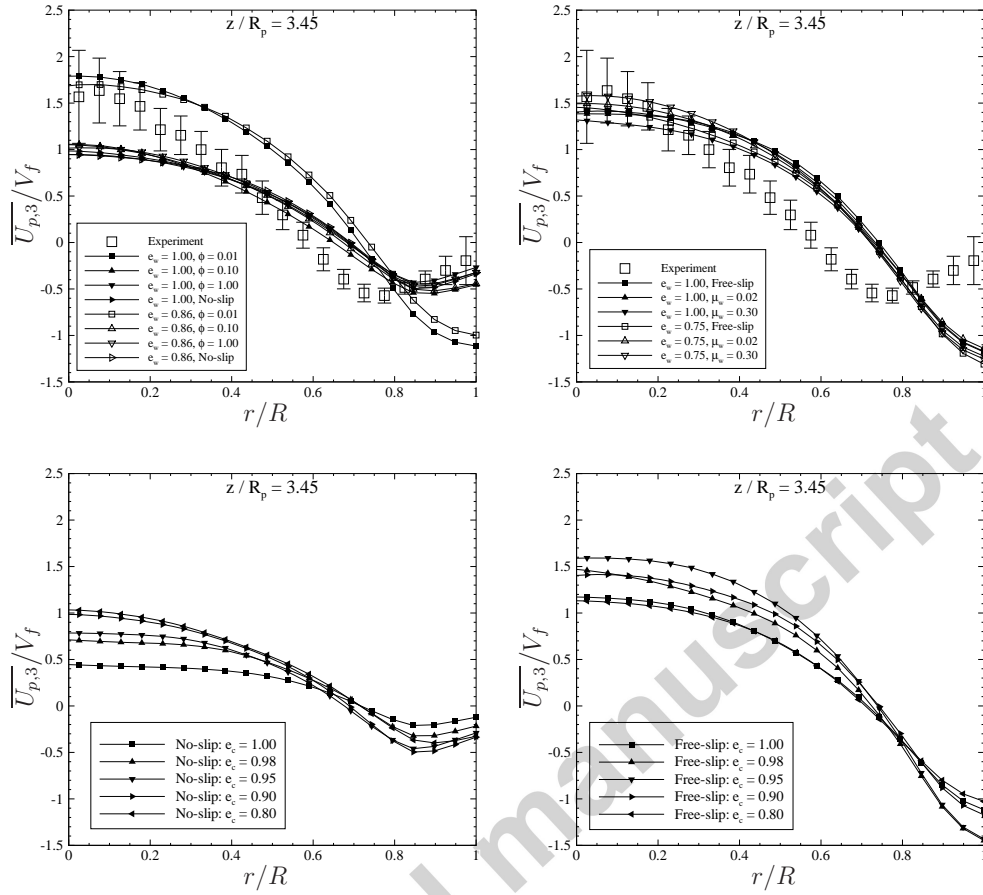


Figure 7: Radial profiles of time-averaged solid vertical velocity normalized by the fluidization velocity measured at $z/R = 3.45$. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

The maximum of the downward solid velocity is found at $r/R = 0.75$ and the magnitude increases from $0.25V_f$ at $z/R = 1.50$ to $0.6V_f$ at $z/R = 3.45$. Between $r/R = 0.75$ and the wall, the slope changes and the measured mean

solid velocity at the wall is nearly equal to zero.

Figures 6 & 7 show that the smooth wall boundary conditions all give nearly the same trend. The predictions of these boundary conditions are in good accordance with the experiments at the centre of the reactor but in the near wall region the downward solid velocity is overestimated by the numerical simulation. In contrast, rough wall boundary conditions improve the predictions in the near-wall region even if the position of the point where the slope of the profile changes is not exactly predicted. Finally, the flat frictional wall boundary conditions (for physical values of the dynamic friction coefficient, $\mu_w \leq 0.3$) lead to a particle wall shear stress effect too small in comparison with the experimental results. In contrast, the rough wall boundary condition of Johnson & Jackson (with specular coefficient equal to or larger than 0.1) or the No-slip boundary conditions lead to a particle wall shear stress effect comparable with the experimental study.

The dependence of the mean solid velocity on the particle-particle restitution coefficient is also shown by Figures 6 & 7. For rough wall boundary conditions, the normal restitution coefficient modifies the magnitude of the mean vertical solid velocity. In the central zone of the reactor, with decreasing normal restitution coefficient, we observe an increase in the mean vertical gas velocity while an opposite trend is observed close to the wall. For smooth wall boundary conditions the effect of the normal restitution coefficient is less clear.

Figure 8 shows the time-averaged solid velocity field in a vertical plane passing through the symmetry axis, corresponding to $y = 0$ in the simulation mesh (see Figure 2) for Free-slip, No-slip and Johnson & Jackson's rough

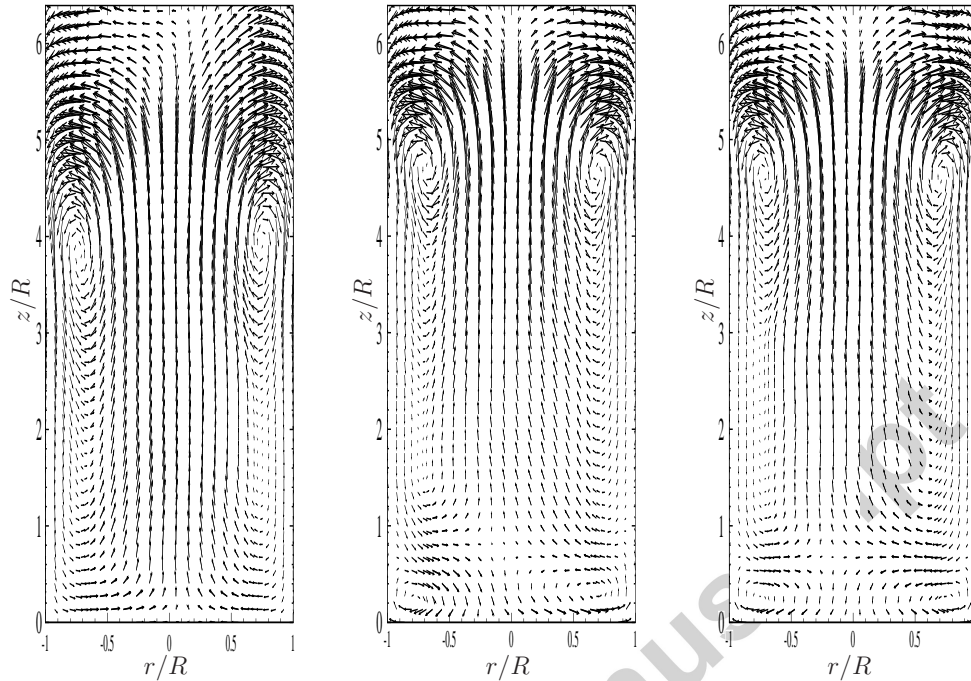


Figure 8: Effect of the wall boundary conditions for the solid phase on the time-averaged solid velocity field. This vertical plane is passing through the symmetry axis and is defined by $y = 0$ in the simulation mesh. Left: Free-slip, middle: No-slip and right: Johnson & Jackson's rough wall with $\phi = 0.1$ and $e_w = 1.0$ boundary conditions for the solid phase.

wall boundary conditions with $\phi = 0.1$. In the case of Free-slip boundary conditions, the figure shows that, on average, the particles move upwards at the center of the reactor and downwards close to the wall. The time-averaged solid velocity field exhibits a single clockwise macroscopic mixing loop. According to the cylindrical symmetry of these time-averaged results, the 3D structure has a toroidal shape or a donut shape. The rough wall boundary conditions, No-slip and Johnson & Jackson's conditions with $\phi =$

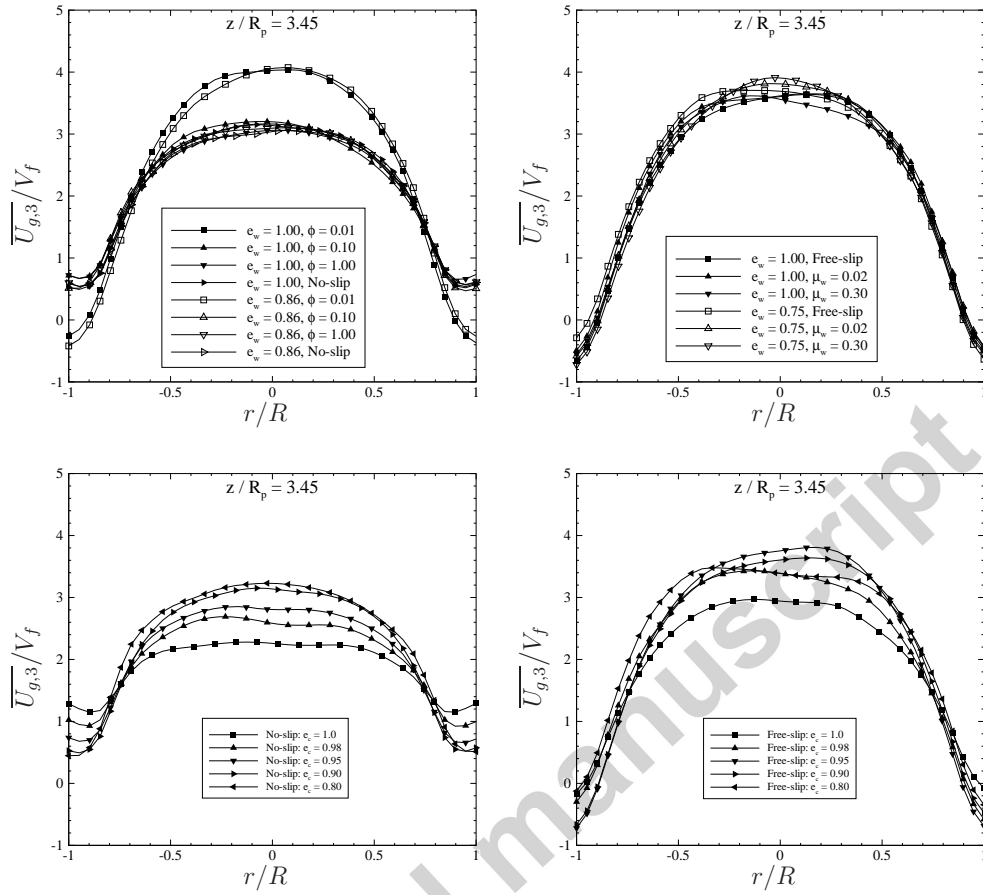


Figure 9: Radial profiles of time-averaged gas vertical velocity normalized by the fluidization velocity. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panel: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

0.1, both lead to a more complex structure of the flow. Indeed two large-scale mixing loops are depicted by Figure 8. In the upper part of the reactor, a clockwise mixing loop is still observed whereas, in the bottom part of the

reactor, a counter clockwise loop is observed. Also it can be noticed that the position of centre of the upper loop has moved upward, significantly, compared to the case with Free-slip boundary conditions. The analysis of the time-averaged solid velocity field, obtained for specular coefficient smaller than 0.1 ($\phi = 0.01$ and 0.001), shows the full disappearance of the second counter clockwise loop in the bottom part of the reactor. So the transition between single- and double-loop structure is controlled by the solid wall shear stress intensity.

The radial profiles of time-averaged vertical gas velocity are shown by Figure 9. At the centre of the reactor, all profiles exhibit an upward gas velocity up to 3.5 times the fluidization velocity. Downward gas velocity is observed close to the wall with smooth wall boundary conditions. As shown by Figure 7 with such boundary conditions, the solid goes towards the bottom of the reactor without, or with very small, friction with the wall. Then the gas is entrained by the solid and also moves downward. In contrast, for a specular coefficient $\phi \geq 0.1$ the rough wall boundary conditions predict an upward gas velocity in the near wall region. Figure 9 shows that the normal restitution coefficient has the same effect on the mean vertical gas velocity as on the mean vertical solid velocity.

Figure 10 shows the radial profile of the time-averaged solid volume fraction. For a given value of the particle-particle normal restitution coefficient ($e_c = 0.9$) the smooth boundary conditions all give the same profiles. The profile of solid volume fraction has a minimum at the centre of the reactor and for the smooth boundary conditions the maximum is found at the wall. For rough wall boundary conditions with a significant specular coefficient

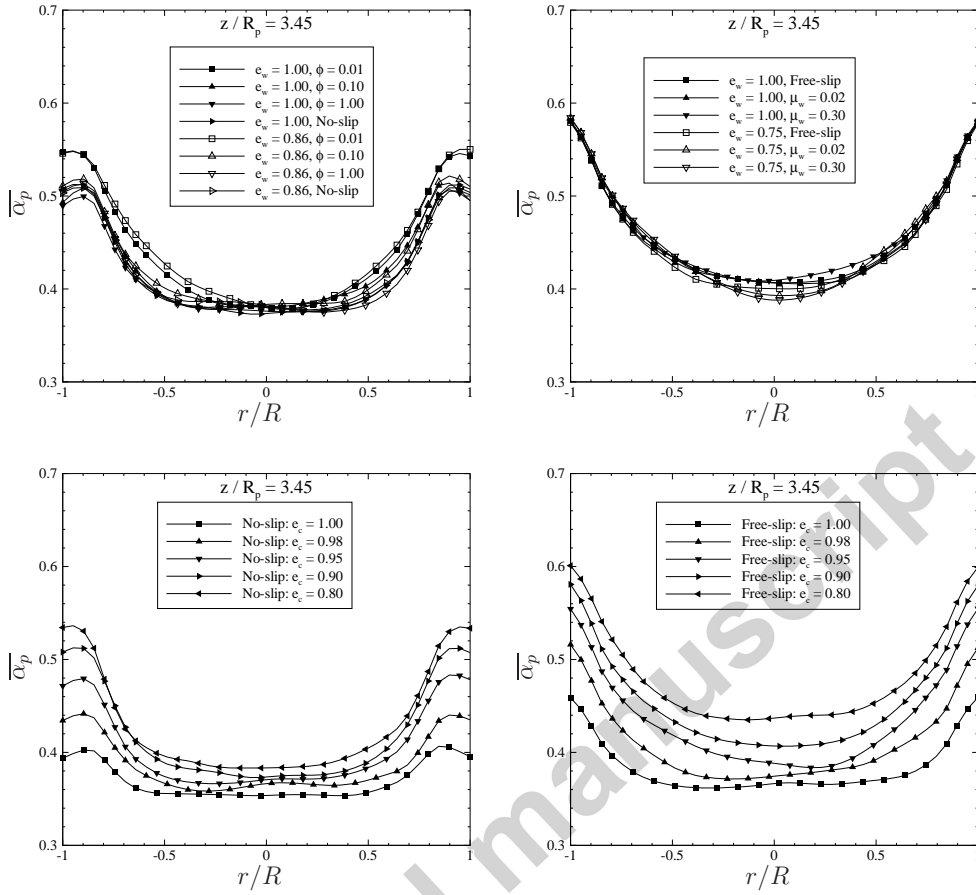


Figure 10: Radial profiles of time-averaged solid volume fraction. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panel: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

($\phi \geq 0.1$), or for No-slip boundary conditions, the maximum is found not at the wall but at a small distance away from the wall. By decreasing the particle-particle restitution coefficient, the solid volume fraction is found to increase.

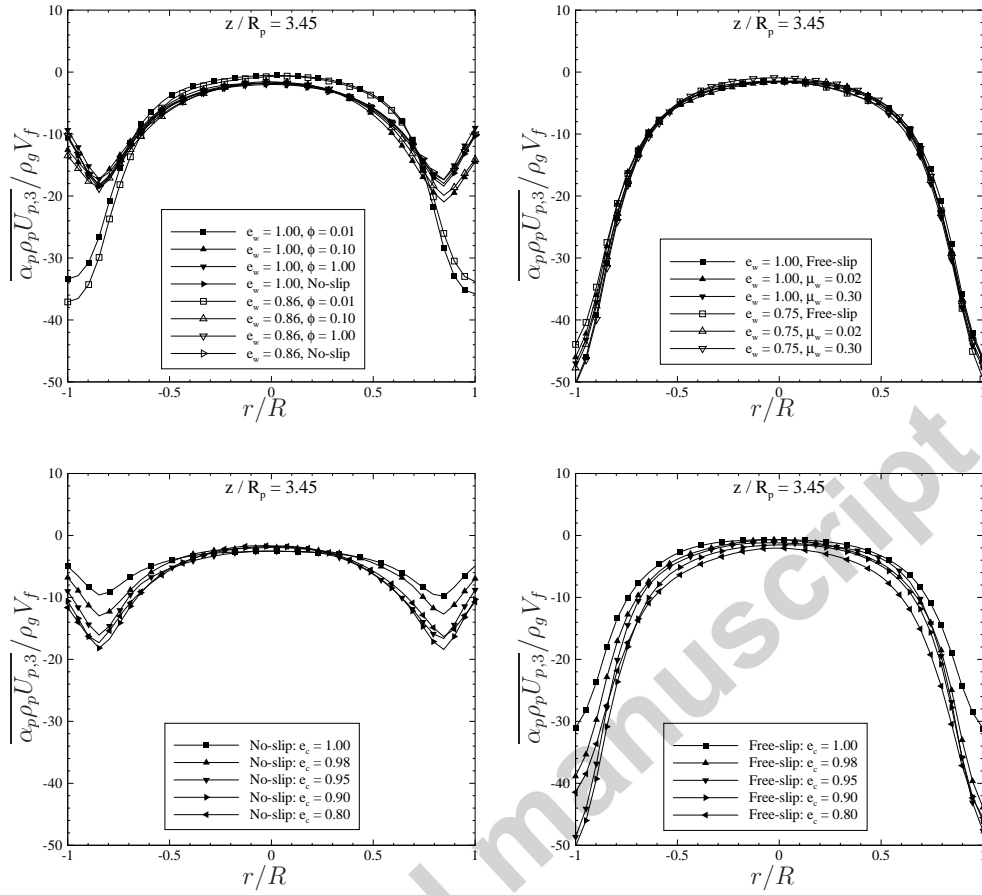


Figure 11: Radial profile of the time-averaged downward solid mass flux normalized by the inlet gas mass flux. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panel: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

Downward and upward time-averaged solid mass fluxes are shown by Figures 11 & 12 respectively. As expected, downward solid mass flux is observed in the near-wall region and an upward flux at the centre of the reactor.

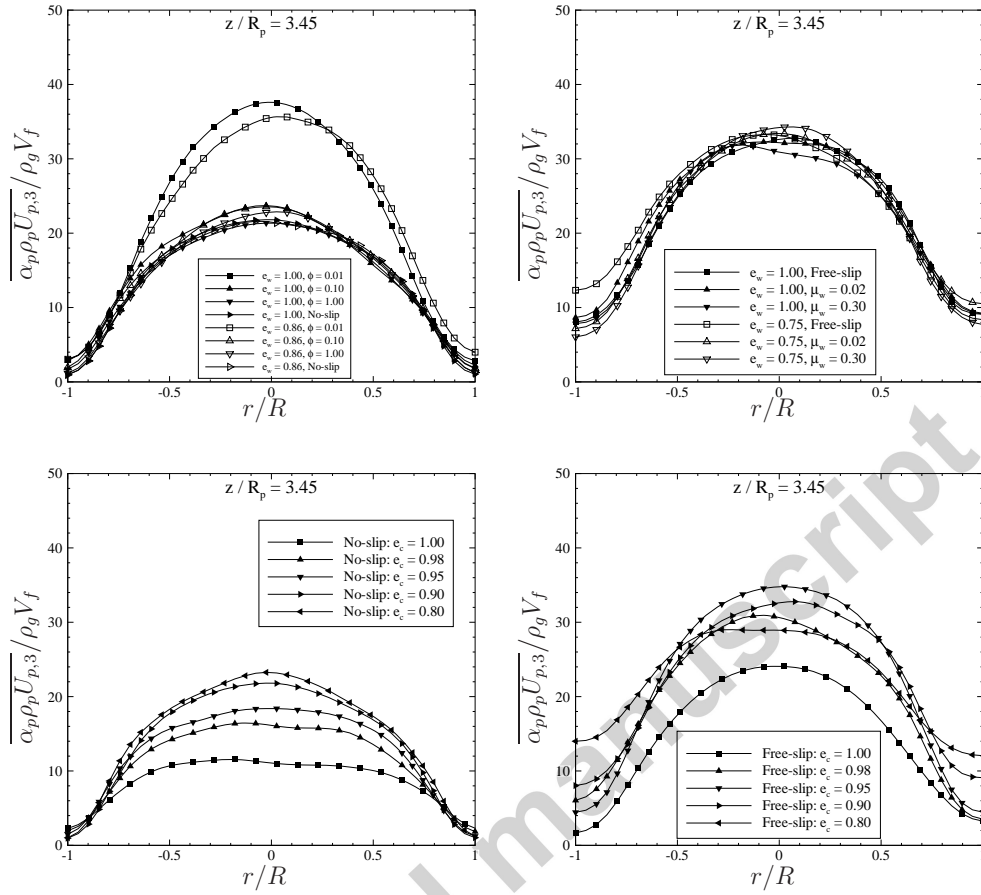


Figure 12: Radial profile of the time-averaged upward solid mass flux normalized by the inlet gas mass flux. Upper panels: effect of the wall boundary conditions (with the particle-particle restitition coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitition coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

The largest downward mass flux is obtained with smooth boundary conditions. Rough wall boundary conditions lead to more complex profiles. Indeed, downward solid mass flux profiles exhibits peaks located approximately

at $r/R = 0.80$ and at the wall the downward solid mass flux is four times smaller than that obtained with smooth wall boundary conditions. Figures 11 & 12 show that the particle-particle restitution coefficient modifies the upward and downward solid mass flux. By decreasing the particle-particle restitution coefficient the magnitude of upward and downward solid mass fluxes are both found to increase for all kinds of boundary conditions.

5.3. Meso-scale fluctuating motion in the bed

Time-averaged variance of the solid volume fraction is shown by Figure 13 to characterize the meso-scale variations of the local instantaneous particle concentration corresponding to the so-called bubbles in the dense fluidized bed. At the centre of the reactor, approximately between $-0.5 < r/R < 0.5$, flat profiles are exhibited. Close to the walls, the solid volume fraction variance decreases quickly. As shown by Figure 13 the wall boundary conditions do not affect the profiles of the time-averaged variance of the solid volume fraction. In contrast, the normal restitution coefficient strongly modifies the magnitude of solid volume fraction variance - yet keeping the shape of the profile more or less unchanged. The fluctuations of the solid volume fraction are increased as the normal restitution coefficient decreases.

The variance of the vertical solid velocity normalized by the square of the fluidization velocity shown by Figure 14 is an indicator of the large scale fluctuating motion of the solid phase. First of all it can be observed that the fluctuations of the mean vertical solid velocity are large - of the same order, or larger, than the fluidization velocity. Smooth wall boundary conditions lead to very large fluctuations of solid velocity in particular close to the wall ($\overline{U_{p,3}^2}/V_f^2 \approx 3$). In contrast, the rough wall boundary conditions damped

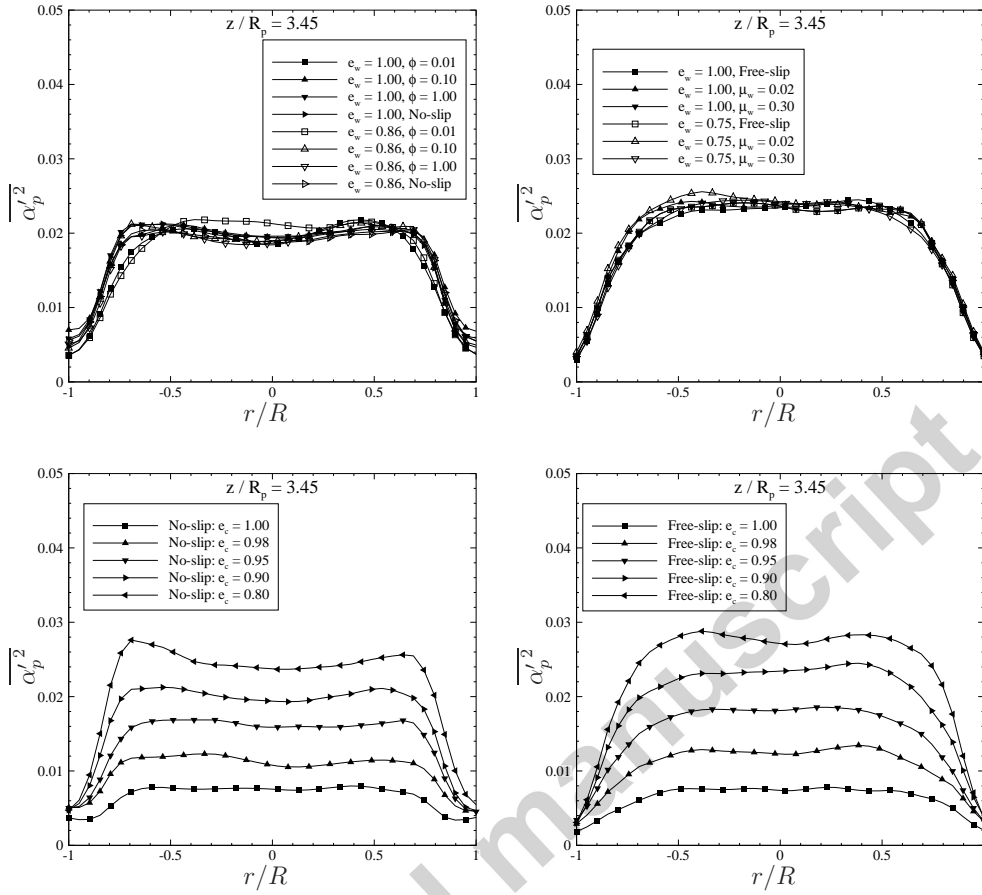


Figure 13: Radial profile of the time-averaged variance of solid volume fraction. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panels: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

the fluctuations of solid velocity and close to the wall the fluctuations go to zero (except for the smallest specularity coefficient value, $\phi = 0.01$). Figure 14 shows that, at the centre of the reactor, decreasing the normal restitution coefficient tends to increase the fluctuations of the mean vertical solid

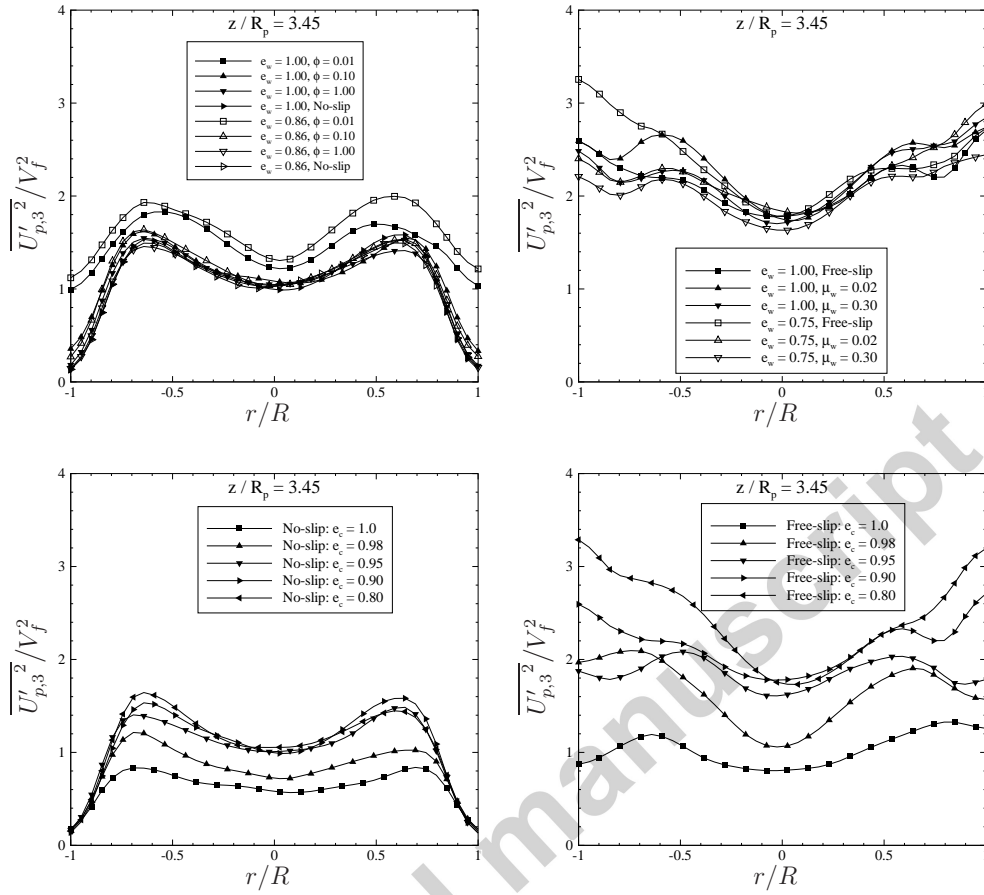


Figure 14: Radial profile of the time-averaged variance of vertical solid velocity normalized by the square of fluidization velocity. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panel: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

velocity.

The random particle kinetic energy is shown by Figure 15. The smooth wall boundary conditions have no effect on the radial profile of particle ki-

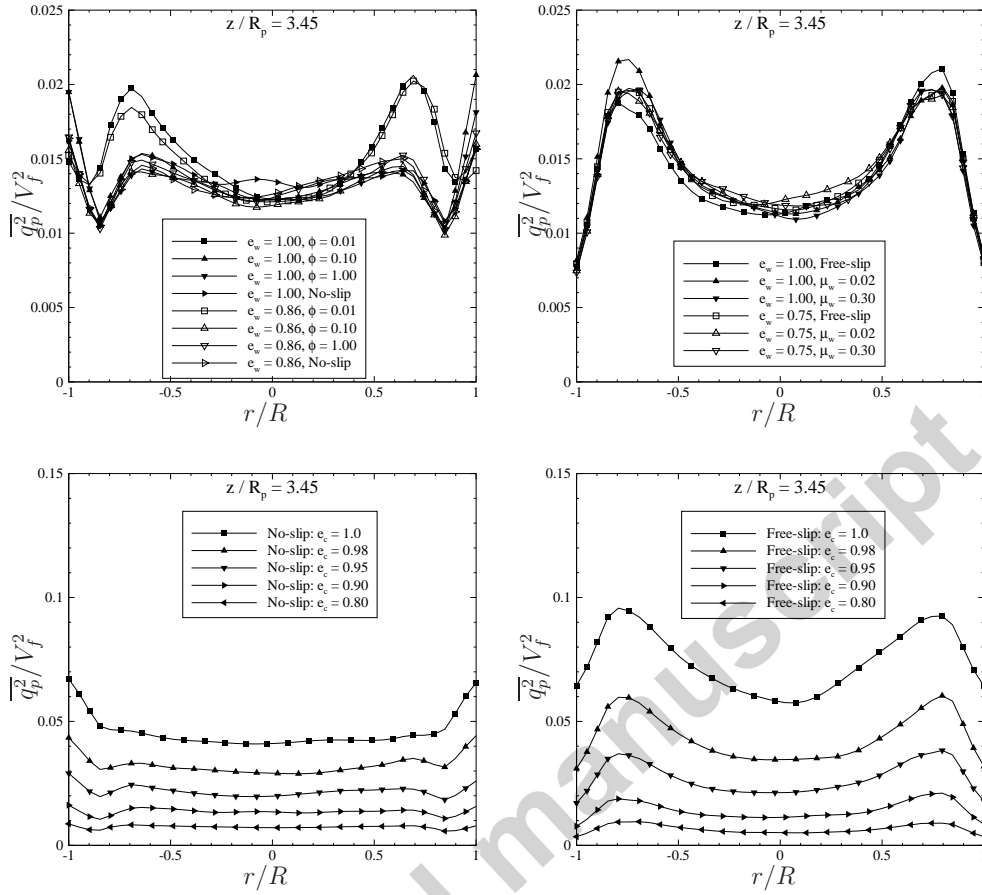


Figure 15: Radial profile of the time-averaged particle kinetic energy normalized by the square of fluidization velocity. Upper panels: effect of the wall boundary conditions (with the particle-particle restitution coefficient $e_c = 0.9$), bottom panel: effect of particle-particle normal restitution coefficient, left panels: rough wall boundary conditions, right panels: smooth wall boundary conditions.

netic energy. The particle kinetic energy is nearly uniform at the centre of the reactor (between $-0.5 < r/R < 0.5$). Two peaks appear at $r/R = \pm 0.75$ and q_p^2 is decreasing close to the wall. As the q_p^2 profile is only slightly depen-

dent on the wall boundary conditions, the decrease of the random particle kinetic energy in the near-wall region is probably due to the decrease in the production rate by the mean shear when approaching the wall (as shown by Figure 7). Figure 15 (left-upper panel) shows that the radial profile of the time-averaged random kinetic energy is slightly dependent on the particle wall restitution coefficient and on the specularity coefficient. In contrast with the smooth boundary condition effect, the random kinetic energy strongly increases when approaching the wall. This very different behavior from the smooth wall case, may be analyzed in two steps. First, as for the smooth wall case, the first dominant effect on the random kinetic energy profile is probably the production by the solid mean velocity gradient (see equation (A.21)) which is increasing when approaching the wall due to the large friction induced by the wall boundary condition on the solid mean velocity. This effect is also very noticeable when using the No-slip boundary conditions. Second, as pointed out in section 3.3, the Johnson and Jackson wall boundary condition of the random particle kinetic energy accounts for two competitive effects: a source term, due to the wall roughness, representing the transfer of kinetic energy from the mean solid motion and a sink term representing the dissipation by inelastic collision by the wall. Then, as shown by Figure 15, the random kinetic energy is increasing up to the wall meaning that the production due to the roughness effect is dominant over the dissipation due to inelastic wall-particle collision. According to equations (9) and (10), these production effects in the near wall region should disappear for lower values of the specularity coefficients, leading to random kinetic energy profiles with minimum values at the wall, similar to the ones obtained for the smooth wall

boundary conditions.

Figure 15 shows that the normal particle-particle restitution coefficient has a strong effect on the random particle kinetic energy for both No-slip and Free-slip boundary conditions. According to the dissipation effect of inelastic collisions, decreasing the normal restitution coefficient leads to a decrease in the time-averaged random particle kinetic energy in the whole bed. Typically, with No-slip boundary conditions, the random particle agitation is $q_p^2 = 4.2 \times 10^{-3} \text{ m}^2/\text{s}^2$ for $e_c = 1.0$ and for $e_c = 0.8$ we have $q_p^2 = 7.2 \times 10^{-4} \text{ m}^2/\text{s}^2$. The shapes of the profiles of q_p^2 close to the wall are conserved for a given wall boundary condition type.

6. Discussion of the influence of the particle-particle restitution coefficient and the solid wall boundary conditions

6.1. *Effect of the normal particle-particle restitution coefficient on the hydrodynamics of dense fluidized bed*

Figure 5 shows that decreasing the normal restitution coefficient leads to a decrease in the height of the bed. This effect is due to the increasing solid segregation effect in the fluidized bed with the formation of bubbles corresponding to regions with very low values of particle volume fraction surrounded by dense particle regions (Balzer et al., 1995). According to the non linear dependence of the drag on the particle volume fraction, the mean drag force in such a heterogeneous system is smaller than in the homogeneous case.

Figure 16 shows instantaneous fields of volume fraction for different values of the restitution coefficient and boundary condition type. It is clear that for

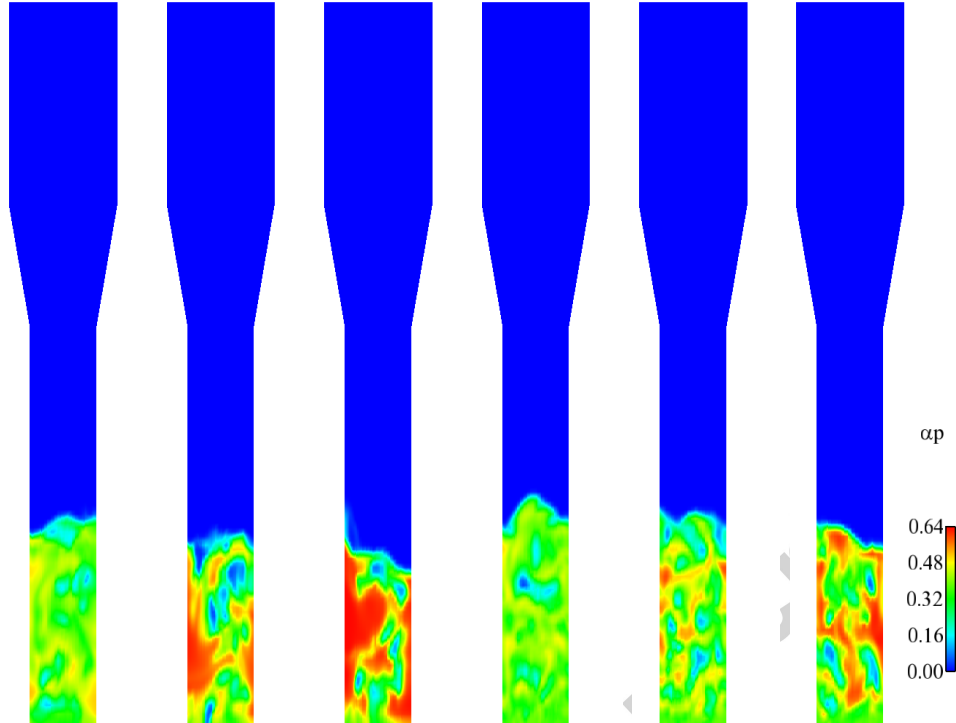


Figure 16: Instantaneous solid volume fraction fields for different boundary conditions for the solid phase and different values of particle-particle restitution coefficient. From the left to the right; Free-slip and $e_c = 1.00$, Free-slip and $e_c = 0.95$, Free-slip and $e_c = 0.80$, No-slip and $e_c = 1.00$, No-slip and $e_c = 0.95$, No-slip and $e_c = 0.80$.

$e_c = 1$ the distribution of solid in the reactor is much more homogeneous than in case of $e_c < 1$. The formation of bubbles is observed with both No-slip and Free-slip boundary conditions. This trend was also shown by Figure 13 where the variance of the solid volume fraction was found to decrease with increasing particle-particle restitution coefficient.

Figure 17 shows the probability density function of the solid volume fraction in a test-cylinder located at the centre of the reactor. The peak of

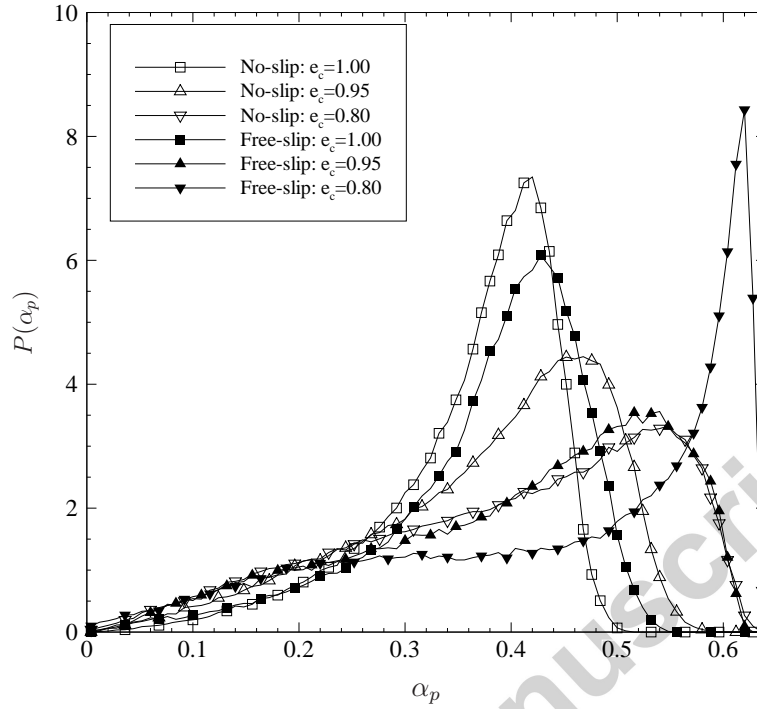


Figure 17: Probability density function of the solid volume fraction in a cylinder defined such as $-0.5 \leq r/R \leq 0.5$ and $0.5 \leq z/R \leq 3.5$ for different values of particle-particle restitution coefficient and wall boundary type.

probability moves towards large volume fraction as the normal restitution coefficient decreases.

The presence of the mesoscale particle collective motion leads also to larger fluctuations of the vertical solid velocity as shown by Figure 14. In contrast, the particle kinetic energy decreases with decreases in the normal restitution coefficient. This tendency is expected because according to the transport equation of the random particle kinetic energy, Eq. (A.21), the collisions lead to a sink term proportional to $1 - e_c^2$.

The results are in accordance with those of Goldschmidt et al. (2001). Indeed Goldschmidt et al. (2001) observed that the intensity of gas pressure fluctuations in the bed increases gradually when the coefficient of restitution is decreasing. Such an increase of the pressure fluctuation intensity is typically related to increases in the variances of the solid volume fraction and the mean solid velocity, when the restitution coefficient is decreasing, as shown in the paper simulations. In addition, Goldschmidt et al. (2001) showed, in accordance with these simulations presented here, that a decrease in the restitution coefficient leads to a decrease in the random particle kinetic energy.

6.2. Effect of wall boundary conditions for the solid phase

The effect of the wall boundary conditions for the solid phase comes from two contributions: the boundary conditions on the mean solid velocity and that on the random particle kinetic energy. Figure 3 & 4 show that if only the wall-normal restitution coefficient is modified, which affects only the random particle kinetic energy boundary condition, no significant modification of the bed height is observed. In contrast, changing the wall boundary condition on the mean solid velocity leads to different vertical profiles of gas pressure and solid volume fraction.

The radial profile of the mean solid vertical velocity (Figure 6 & 7) shows that the smooth wall boundary conditions lead to a large downward solid velocity at the wall. In contrast, the downward velocity is reduced by using rough wall boundary conditions meaning that the effective friction of the particulate flow with the wall is increased. Figure 6 & 7 show no drastic effect of varying the wall-normal restitution coefficient from $e_w = 1.00$ to

$e_w = 0.86$ on the mean solid vertical velocity. As a matter of fact, e_w is not affecting directly the mean velocity boundary condition but might be effective through the modification of the random kinetic energy. However, Figure 15 shows that e_w has no effect on the radial profile of random kinetic energy when using smooth boundary condition and will not affect the mean solid velocity either. As discussed in section 5.3, the dependence of the random particle kinetic energy on the wall-normal restitution coefficient for the rough wall boundary conditions is more complex. Decreasing e_w should lead to a decrease of q_p^2 and should decrease the friction of the particulate flow with the wall. But for the typical values of the specular coefficient used in the paper simulations ($\phi = 0.01$ to 1), the dissipation of random particle kinetic energy due to wall-normal restitution coefficient looks negligible compared to the kinetic energy transfer from the mean particulate flow due wall roughness effect.

7. Conclusions

Numerical simulations of pressurized dense fluidized bed have been performed with an Euler-Euler approach. The effect of the particle-particle restitution coefficient and wall boundary conditions for the solid phase have been investigated. Two kinds of boundary conditions have been used: rough wall boundary conditions (Johnson and Jackson (1987) and No-slip) and smooth wall boundary conditions (Sakiz and Simonin (1999) and Free-slip).

The time-averaged Eulerian solid vertical velocity component has been compared with experimental measurements obtained by Positron Emission Particle Tracking. The time-averaged solid vertical velocity from the numer-

ical simulations is in good agreement with the experimental data. It has been shown that the numerical predictions may be improved by using rough wall boundary conditions. The analysis of the time-averaged solid velocity fields showed that the Free-slip boundary condition leads to a macroscopic toroidal (donut shape) circulation loop. In contrast, No-slip or Johnson & Jackson's boundary conditions, with a large value of the specular coefficient ($\phi \geq 0.1$), lead to two counter-rotating mixing toroidal loops.

A detailed analysis of the role of the boundary conditions on the Eulerian solid velocity and on the random particle kinetic energy has been performed. It has been shown that, in such a fluidized bed, the boundary conditions on the Eulerian solid velocity are of much more importance than those on the random particle kinetic energy. Finally the No-slip boundary condition for the mean particle velocity supplemented with zero flux boundary condition for the random particle kinetic energy are found to be good and effective approximations for solid wall boundary conditions representing particle-wall interaction with large roughness effects leading to predictions in satisfactory agreement with PEPT experimental data.

8. Acknowledgment

This work was granted access to the HPC resources of CALMIP under allocation P0111 (Calcul en Midi- Pyrénées). This work was performed using HPC resources from GENCI-CINES (Grant 2015-x20152b7423).

This work has been done in the frame of a long-term collaboration with INEOS Technology Centre, Lavéra (FRANCE).

References

- Agrawal, K., Loezos, P., Syamlal, M., Sundaresan, S., 2001. The role of meso-scale structures in rapid gas-solid flows. *Journal of Fluid Mechanics* 445, 151–185.
- Balzer, G., 2000. Gas-solid flow modelling based on the kinetic theory of granular media: validation, applications and limitations. *Powder Technology* 113, 299–309.
- Balzer, G., Boëlle, A., Simonin, O., 1995. Eulerian gas-solid flow modeling of dense fluidized bed. In: *FLUIDIZATION VII, Proc International Symposium of the Engineering Foundation*. pp. 1125–1134.
- Benyahia, S., Syamlal, M., O'Brien, T. J., 2005. Evaluation of boundary conditions used to model dilute, turbulent gas/solids flows in a pipe. *Powder Technology* 156, 62 – 72.
- Boëlle, A., Balzer, G., Simonin, O., 1995. Second-order prediction of the particle-phase stress tensor of inelastic spheres in simple shear dense suspensions. In: *Gas-Particle Flows*. Vol. 228. ASME FED, pp. 9 – 18.
- Capecelatro, J., Desjardins, O., 2013. An EulerLagrange strategy for simulating particle-laden flows. *Journal of Computational Physics* 238, 1–31.
- Cercignani, C., 1975. *Theory and Application of the Boltzmann Equation*. Elsevier, New-York.
- Deen, N. G., Van Sint Annaland, M., der Hoef, M. A. V., Kuipers, J. A. M.,

2007. Review of discrete particle modeling of fluidized beds. *Chemical Engineering Science* 62 (1–2), 28–44.
- Di Renzo, A., Di Maio, F. P., 2007. Homogeneous and bubbling fluidization regimes in DEM-CFD simulations: Hydrodynamic stability of gas and liquid fluidized beds. *Chemical Engineering Science* 62 (1–2), 116–130.
- Ergun, S., 1952. Fluid flow through packed columns. *Chemical Engineering Progress* 48, 89–94.
- Fede, P., Moula, G., Ingram, A., Dumas, T., Simonin, O., 2009. 3D numerical simulation and PEPT experimental investigation of pressurized gas-solid fluidized bed hydrodynamic. In: *Proceedings of ASME 2009 Fluids Engineering Division Summer Meeting, ASME FEDSM09-78048*, August 2-5, Vail, Colorado, USA. pp. 1833–1842.
- Fede, P., Neau, H., Simonin, O., Ghouila, I., 2010. 3D unsteady numerical simulation of the hydrodynamic of a gas phase polymerization pilot reactor. In: *7th International Conference on Multiphase Flow, ICMF 2010*, Tampa, FL, May 30 - June 4.
- Fede, P., Simonin, O., Ansart, R., Neau, H., Ghouila, I., 2011a. Effect of wall boundary conditions and mesh refinement on numerical simulation of pressurized dense fluidized bed for polymerization reactor. In: *International Conference on Circulating Fluidized Beds and Fluidization Technology - CFB-10* May 1 - 5, Sunriver, Oregon, USA.
- Fede, P., Simonin, O., Ghouila, I., 2011b. 3D numerical simulation of poly-disperse pressurized gas-solid fluidized bed. In: *Proceedings of AJK2011-*

- FED, ASME-JSME-KSME Joint Fluids Engineering Conference 2011, July 24-29, 2011, Hamamatsu, Shizuoka, JAPAN. pp. 3199–3210.
- Ferschneider, G., Mège, P., 2002. Dilute gas-solid flow in a riser. *Chemical Engineering Journal* 87, 41 – 48.
- Foerster, S. F., Louge, M. Y., Chang, H., Allia, K., 1994. Measurements of the collision properties of small spheres. *Physics of Fluids* 6 (3), 1108–1115.
- Gidaspow, D., 1994. *Multiphase Flow and Fluidization: Continuum and Kinetic Theory Descriptions*. Academic Press.
- Gobin, A., Neau, H., Simonin, O., Llinas, J. R., Reiling, V., Sélo, J. L., 2003. Fluid dynamic numerical simulation of a gas phase polymerisation reactor. *International Journal for Numerical Methods in Fluids* 43, 1199–1220.
- Goldschmidt, M., Kuipers, J., van Swaaij, W., 2001. Hydrodynamic modelling of dense gas-fluidised beds using the kinetic theory of granular flow: effect of coefficient of restitution on bed dynamics. *Chemical Engineering Science* 56 (2), 571 – 578.
- He, J., Simonin, O., 1993. Non-equilibrium prediction of the particle-phase stress tensor in vertical pneumatic conveying. In: *Gas-Solid Flows*, ASME-FED. Vol. 166. pp. 253–263.
- Heynderickx, G. J., Das, A. K., Wilde, J. D., Marin, G. B., 2004. Effect of clustering on gas-solid drag in dilute two-phase flow. *Ind. Eng. Chem. Res.* 43, 4635–4646.

- Hui, K., Haff, P. K., Ungar, J. E., Jackson, R., 1984. Boundary conditions for high-shear grain flows. *Journal of Fluid Mechanics* 145, 223 – 233.
- Igci, Y., Andrews IV, A. T., Sundaresan, S., Pannala, S., OBrien, T., 2008. Filtered two-fluid models for fluidized gas-particle suspensions. *AIChE Journal* 54, 1431–1448.
- Ingram, A., Haussard, M., Fan, X., Parker, D. J., Seville, J. P., Finn, N., Kilvington, R., Evans, M., 2007a. Portable positron emission particle tracking (PEPT) for industrial scale use. In: 12th International Conference on Fluidisation - New Horizons in Fluidization Engineering. No. 60.
- Ingram, A., Yang, Z., Bakalis, S., Parker, D., Fan, X., Fryer, P., Seville, J., 2007b. Multiple particle tracking in a fluidised bed. In: 12th International Conference on Fluidisation - New Horizons in Fluidization Engineering.
- Jenkins, J., 1992. Boundary conditions for rapid granular flows : flat, frictional walls. *J. of App. Mech.* 59, 120–135.
- Jenkins, J. T., Louge, M. Y., 1997. On the flux of fluctuation energy in a collisional grain flow at a flat, frictional wall. *Physics of Fluids* 10, 2835–2840.
- Jenkins, J. T., Richman, M. W., 1986. Boundary conditions for plane flows of smooth, nearly elastic, circular disks. *Journal of Fluid Mechanics* 171, 53 – 69.
- Johnson, P. C., Jackson, R., 1987. Frictional-collisional constitutive relations for granular materials, with application to plane shearing. *Journal of Fluid Mechanics* 176, 67 – 93.

- Kaneko, Y., Shiojima, T., Horio, M., 1999. DEM simulation of fluidized beds for gas-phase olefin polymerization. *Chemical Engineering Science* 54 (24), 5809–5821.
- Konan, N. A., Lain, S., Simonin, O., Sommerfeld, M., 2006a. Comparison between Euler-Euler and Euler-Lagrange computation of gas-solid turbulent flow in a horizontal channel with different wall roughness. In: *Proc. 7th International Symposium on Numerical Methods for Multiphase Flows. ASME Joint U.S. European Fluids Engineering Summer Meeting, FEDSM2006-98263*, pp. 617–625.
- Konan, N. A., Simonin, O., Squires, K., 2006b. Rough wall boundary condition derivation for particle continuum equations : validation from LES/DPS of gas-solid turbulent channel flow. In: *Proc. 7th International Symposium on Numerical Methods for Multiphase Flows. ASME Joint U.S. European Fluids Engineering Summer Meeting, FEDSM2006-98267*, pp. 1723–1732.
- Li, T., Grace, J., Bi, X., 2010. Study of wall boundary condition in numerical simulations of bubbling fluidized beds. *Powder Technology* 203 (3), 447 – 457.
- Link, J. M., Deen, N. G., Kuipers, J. A. M., Fan, X., Ingram, A., Parker, D. J., Wood, J., Seville, J. P. K., 2008. PEPT and discrete particle simulation study of spout-fluid bed regimes. *AIChE Journal* 54 (5), 1189–1202.
- Louge, M. Y., 1994. Computer simulations of rapid granular flows of sphere interacting with a flat , frictional boundary. *Physics of Fluids* 6, 2253–2269.

- Lun, C., Savage, S., 1986. The effects of an impact velocity dependent coefficient of restitution on stresses developed by sheared granular materials. *Acta Mechanica* 63, 539–559.
- Morioka, S., Nakajima, T., 1987. Modeling of gas and solid particles 2-phase flow and application to fluidized-bed. *Journal de Mécanique Théorique et Appliquée* 6 (1), 77–88.
- Neau, H., Fede, P., Laviéville, J., Simonin, O., 2013. High performance computing (HPC) for the fluidization of particle-laden reactive flows. In: *The 14th International Conference on Fluidization From Fundamentals to Products*.
- Neau, H., Laviéville, J., Simonin, O., 2010. NEPTUNE_CFD high parallel computing performances for particle-laden reactive flows. In: *7th International Conference on Multiphase Flow, ICMF 2010, Tampa, FL, May 30 - June 4*.
- Olaofe, O., Patil, A., Deen, N., van der Hoef, M., Kuipers, J., 2014. Simulation of particle mixing and segregation in bidisperse gas fluidized beds. *Chemical Engineering Science* 108, 258–269.
- Ozel, A., Fede, P., Simonin, O., 2013. Development of filtered Euler-Euler two-phase model for circulating fluidised bed: High resolution simulation, formulation and a priori analyses. *International Journal of Multiphase Flow* 55, 43–63.
- Parmentier, J.-F., Simonin, O., Delsart, O., 2008. A numerical study of fluidization behavior of Geldart B, A/B and A particles using an Eulerian

- multifluid modeling approach. In: Proc. of the 9th Int. Conference on Circulating Fluidized Beds. Circulating Fluidized Bed Technology IX, pp. 331–336.
- Parmentier, J.-F., Simonin, O., Delsart, O., 2012. A functional subgrid drift velocity model for filtered drag prediction in dense fluidized bed. *AICHE Journal* 58 (4), 1084–1098.
- Rogers, C., Eaton, J., 1990. The behavior of solid particles in a vertical turbulent boundary layer in air. *International Journal of Multiphase Flow* 16 (5), 819 – 834.
- Rokkam, R., Sowinski, A., Fox, R., Mehrani, P., Muhle, M., 2013. Computational and experimental study of electrostatics in gas-solid polymerization fluidized beds. *Chemical Engineering Science* 92, 146 – 156.
- Rokkam, R. G., Fox, R. O., Muhle, M. E., 2010. Computational fluid dynamics and electrostatic modeling of polymerization fluidized-bed reactors. *Powder Technology* 203 (2), 109 – 124.
- Sakiz, M., Simonin, O., 1999. Development and validation of continuum particle wall boundary conditions using Lagrangian simulation of a vertical gas-solid channel flow. In: Proc. ASME Fluids Engineering Division Summer Meeting, FEDSM99-7898.
- Schneiderbauer, S., Schellander, D., Lderer, A., Pirker, S., 2012. Non-steady state boundary conditions for collisional granular flows at flat frictional moving walls. *International Journal of Multiphase Flow* 43, 149–156.

- Soleimani, A., Pirker, S., Schneiderbauer, S., 2015. Solid boundary condition for collisional gassolid flows at rough walls. *Powder Technology* 281, 28 – 33.
- Sommerfeld, M., Huber, N., 1999. Experimental analysis and modelling of particle-wall collisions. *International Journal of Multiphase Flow* 25, 1457–1489.
- Stellema, C., Vlek, J., Mudde, R., de Goeij, J., van den Bleek, C., 1998. Development of an improved positron emission particle tracking system. *Nuclear Instruments and Methods in Physics Research A* 404, 334–348.
- Sundaresan, S., Radl, S., Milioli, C. C., Milioli, F. E., 2013. Coarse-grained models for momentum, energy and species transport in gas-particle flows. In: Series, E. S. (Ed.), *The 14th International Conference on Fluidization - From Fundamentals to Products*.
- Wen, Y., Yu, Y., 1965. *Mechanics of fluidization*. Chemical Engineering Symposium Series 62, 100–111.

Nomenclature

Subscript

k	$k = g$: gas phase, $k = p$: particulate phase
$wall$	value at the wall

Latin symbols

C_d	drag coefficient, [-]
-------	-----------------------

d_p	particle diameter, [m]
$D_{p,ij}$	particle strain rate tensor, [s ⁻¹]
e_c	particle-particle normal restitution coefficient, [-]
e_w	wall-normal restitution coefficient, [-]
g_0	radial distribution function, [-]
g_i	i th component of the gravitational acceleration, [m/s ²]
H_{bed}	mean height of the fluidized bed, [m]
K_p	granular diffusivity, [m ² /s]
K_p^{col}	collisional granular diffusivity, [m ² /s]
K_p^{kin}	kinetic granular diffusivity, [m ² /s]
n_p	particle number density ($n_p m_p = \alpha_p \rho_p$), [m ⁻³]
m_s	solid mass in the reactor, [kg]
P_g	gas pressure, [Pa]
q_p^2	random particle kinetic energy, [m ² /s ²]
R	internal radius of the fluidization column, [m]
Re_p	particle Reynolds number, [-]
$U_{k,i}$	i th component of the mean velocity of the phase k , [m/s]
$U_{p,\tau}$	mean particle velocity tangent to the wall, [m/s]
V_f	fluidization velocity, [m/s]
V_r	gas-particle mean relative velocity, [m/s]
Greek symbols	
α_p	solid volume fraction, [-]
α_p^{max}	maximum solid packing, [-]
Δ	characteristic grid width, [m]

Δ^*	dimensionless characteristic grid width, [–]
μ_g	dynamical gas viscosity, [kg/m/s]
μ_w	wall-normal dynamic friction coefficient, [–]
ν_p	kinetic viscosity of the phase k , [m ² /s]
ν_p^{col}	collisional granular viscosity, [m ² /s]
ν_p^{kin}	kinetic granular viscosity, [m ² /s]
ϕ	specularity coefficient, [–]
ρ_g	gas density, [kg/m ³]
ρ_p	particle density, [kg/m ³]
$\Sigma_{k,ij}$	kinetic stress tensor of the phase k , [kg/m/s ²]
τ_c	collision time scale, [s]
τ_p^{St}	particle response time based on Stokes law, [s]
τ_{gp}^F	particle response time, [s]

Appendix A. Mathematical model

This appendix gives the set of equations of the multi-fluid Eulerian model. In the following when subscript $k = g$ we refer to the gas and $k = p$ to the particulate phase.

The mass balance equation (without interphase mass transfer) is written

$$\frac{\partial}{\partial t} \alpha_k \rho_k + \frac{\partial}{\partial x_j} \alpha_k \rho_k U_{k,j} = 0 \quad (\text{A.1})$$

where α_k is the volume fraction of the phase k , ρ_k the material density and $U_{k,i}$ the i^{th} component of the k -phase mean velocity. It must be noted that $\alpha_p \rho_p$ represent $n_p m_p$ where n_p is the number density of p -particle centers and m_p the mass of a single p -particle. Then $\alpha_p = n_p m_p / \rho_p$ is an approximation

of the local volume fraction of the dispersed phase. Hence, gas and particle volume fractions α_g and α_p should satisfy $\alpha_p + \alpha_g = 1$.

The mean momentum transport equation is written

$$\alpha_k \rho_k \left[\frac{\partial}{\partial t} + U_{k,j} \frac{\partial}{\partial x_j} \right] U_{k,i} = -\alpha_k \frac{\partial P_g}{\partial x_i} + \alpha_k \rho_k g_i + I_{k,i} - \frac{\partial \Sigma_{k,ij}}{\partial x_j} \quad (\text{A.2})$$

where P_g is the mean gas pressure, g_i the gravity acceleration and $\Sigma_{k,ij}$ the effective stress tensor. In Eq. (A.2), $I_{k,i}$ is the mean gas-particle interphase momentum transfer without the mean gas pressure contribution. According to the large particle to gas density ratio, only the drag force is acting on the particles. The mean gas-particle interphase momentum transfer term is written as:

$$I_{p,i} = -\alpha_p \rho_p \frac{V_{r,i}}{\tau_{gp}^F} \quad \text{and} \quad I_{g,i} = -I_{p,i}. \quad (\text{A.3})$$

The particle relaxation time scale is written

$$\frac{1}{\tau_{gp}^F} = \frac{3}{4} \frac{\rho_g}{\rho_p} \frac{\langle |\mathbf{v}_r| \rangle}{d_p} C_d \quad (\text{A.4})$$

where C_d is the drag coefficient. To take into account the effect of large solid volume fraction Gobin et al. (2003) proposed the following correlation for the drag coefficient

$$C_d = \begin{cases} \min(C_{d,Erg}, C_{d,WY}) & \text{if } \alpha_p > 0.3 \\ C_{d,WY} & \text{otherwise} \end{cases} \quad (\text{A.5})$$

where $C_{d,Erg}$ is the drag coefficient proposed by Ergun (1952):

$$C_{d,Erg} = 200 \frac{\alpha_p}{Re_p} + \frac{7}{3} \quad (\text{A.6})$$

and $C_{d,WY}$ by Wen and Yu (1965):

$$C_{d,WY} = \begin{cases} 0.44 \alpha_g^{-1.7} & \text{if } Re_p \geq 1000 \\ \frac{24}{Re_p} (1 + 0.15 Re_p^{0.687}) \alpha_g^{-1.7} & \text{otherwise} \end{cases}. \quad (\text{A.7})$$

The particle Reynolds number is given by

$$Re_p = \alpha_g \frac{\rho_g \langle |\mathbf{v}_r| \rangle d_p}{\mu_g}. \quad (\text{A.8})$$

The mean fluid-particle relative velocity, $V_{r,i}$, is given in terms of the mean gas and solid velocities: $V_{r,i} = U_{p,i} - U_{f,i}$.

The solid stress tensor is written

$$\Sigma_{p,ij} = \alpha_p \rho_p \langle u'_{p,i} u'_{p,j} \rangle + \Theta_{p,ij} \quad (\text{A.9})$$

where $u'_{p,i}$ is the fluctuating part of the instantaneous solid velocity and $\Theta_{p,ij}$ the collisional particle stress tensor. The solid stress tensor is expressed as (Boëlle et al., 1995; Ferschneider and Mège, 2002; Balzer, 2000),

$$\Sigma_{p,ij} = [P_p - \lambda_p D_{p,mm}] \delta_{ij} - 2\mu_p \tilde{D}_{p,ij} \quad (\text{A.10})$$

where the strain rate tensor is defined by

$$\tilde{D}_{p,ij} = D_{p,ij} - \frac{1}{3} D_{p,mm} \delta_{ij} \quad \text{with} \quad D_{p,ij} = \frac{1}{2} \left[\frac{\partial U_{p,i}}{\partial x_j} + \frac{\partial U_{p,j}}{\partial x_i} \right]. \quad (\text{A.11})$$

The granular pressure, viscosities and model coefficients are given by

$$P_p = \frac{2}{3} \alpha_p \rho_p q_p^2 [1 + 2\alpha_p g_0 (1 + e_c)] \quad (\text{A.12})$$

$$\lambda_p = \frac{4}{3} \alpha_p^2 \rho_p d_p g_0 (1 + e_c) \sqrt{\frac{2}{3} \frac{q_p^2}{\pi}} \quad (\text{A.13})$$

$$\mu_p = \alpha_p \rho_p (\nu_p^{kin} + \nu_p^{col}) \quad (\text{A.14})$$

$$\nu_p^{kin} = \frac{1}{2} \tau_{gp}^F \frac{2}{3} q_p^2 (1 + \alpha_p g_0 \zeta) / \left[1 + \frac{\sigma}{2} \frac{\tau_{gp}^F}{\tau_c} \right] \quad (\text{A.15})$$

$$\nu_p^{col} = \frac{4}{5} \alpha_p g_0 (1 + e_c) \left[\nu_p^{kin} + d_p \sqrt{\frac{2}{3} \frac{q_p^2}{\pi}} \right] \quad (\text{A.16})$$

$$\zeta = \frac{2}{5} (1 + e_c) (3e_c - 1) \quad (\text{A.17})$$

$$\sigma = \frac{1}{5} (1 + e_c) (3 - e_c). \quad (\text{A.18})$$

The collision time scale τ_c is given by

$$\frac{1}{\tau_c} = 4\pi g_0 n_q d_p^2 \sqrt{\frac{2}{3\pi}} q_p^2 \quad (\text{A.19})$$

where the radial distribution function, g_0 , is computed according to Lun and Savage (1986) as

$$g_0(\alpha_p) = \left[1 - \frac{\alpha_p}{\alpha_{max}} \right]^{-2.5\alpha_{max}} \quad (\text{A.20})$$

where $\alpha_{max} = 0.64$ is the closest random packing.

The solid random kinetic energy transport equation is written:

$$\begin{aligned} \alpha_p \rho_p \left[\frac{\partial q_p^2}{\partial t} + U_{p,j} \frac{\partial q_p^2}{\partial x_j} \right] = & - \frac{\partial}{\partial x_j} \left[\alpha_p \rho_p (K_p^{kin} + K_p^{col}) \frac{\partial q_p^2}{\partial x_j} \right] \\ & - \Sigma_{p,ij} \frac{\partial U_{p,i}}{\partial x_j} \\ & - \frac{\alpha_p \rho_p}{\tau_{gp}^F} 2q_p^2 \\ & - \frac{1}{3} \frac{1 - e_c^2}{\tau_c} \frac{2}{3} q_p^2. \end{aligned} \quad (\text{A.21})$$

In Eq. (A.21), the first term on the right-hand-side represents the transport of the random particle kinetic energy due to the particle agitation and the collisional effects. That term is written by introducing the diffusivity coefficients:

$$K_p^{kin} = \frac{2}{3} q_p^2 \frac{5}{9} \tau_{gp}^F (1 + \alpha_p g_0 \zeta_c) / \left[1 + \frac{5}{9} \tau_{gp}^F \frac{\xi_c}{\tau_c} \right] \quad (\text{A.22})$$

$$K_p^{col} = \alpha_p g_0 (1 + e_c) \left[\frac{6}{5} K_p^{kin} + \frac{4}{3} d_p \sqrt{\frac{2}{3\pi}} q_p^2 \right] \quad (\text{A.23})$$

$$\zeta_c = \frac{3}{5} (1 + e_c)^2 (2e_c - 1) \quad (\text{A.24})$$

$$\xi_c = \frac{(1 + e_c)(49 - 33e_c)}{100}. \quad (\text{A.25})$$

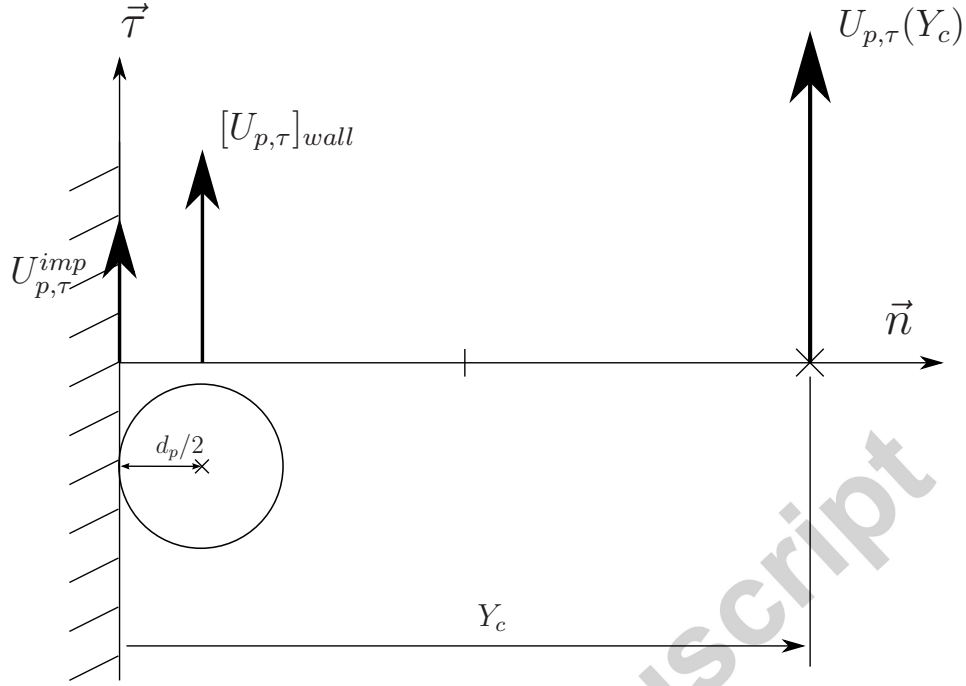


Figure B.18: Sketch of the mesh at the wall.

The second term on the right-hand-side of Eq. (A.21) represents the production of particle agitation by the gradients of the mean solid velocity. The third term is the interaction with the gas. Finally the fourth term is the particle agitation dissipation by inelastic collisions.

Appendix B. Numerical implementation of wall boundary conditions

This appendix is dedicated to the detailed description of the numerical implementation of the boundary conditions for the solid phase mean velocity and random kinetic energy.

According to part 3.2, the flat frictional wall boundary conditions can be written in the following generic forms:

$$\left(\nu_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = A [q_p^2]_{wall} \quad (\text{B.1})$$

$$\left(K_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = B \left([q_p^2]_{wall} \right)^{3/2} \quad (\text{B.2})$$

where A and B are two given parameters of the modelling approach.

For computing the solid wall shear stress and random kinetic energy wall flux effects in the transport equation resolution method, the numerical approach implemented in NEPTUNE_CFD uses a first order gradient approximation between the computed variables at the wall distance Y_c and fictitious imposed variables at the wall (as shown on Figure B.18), so the above equations are written in the frame of the numerical code approach as,

$$\nu_p \{Y_c/2\} \frac{U_{p,\tau} \{Y_c\} - [U_{p,\tau}]^{imp}}{Y_c} = A [q_p^2]_{wall}$$

$$K_p \{Y_c/2\} \frac{q_p^2 \{Y_c\} - [q_p^2]^{imp}}{Y_c} = B \left([q_p^2]_{wall} \right)^{3/2}$$

where $\nu_p \{Y_c/2\}$ and $K_p \{Y_c/2\}$ represent the effective particle viscosity and diffusivity used in the frame of the numerical code approach for the flux computation in the diffusion step resolution method and they are chosen equal to the computed value at Y_c .

Then the fictitious imposed values of the solid mean velocity and random kinetic energy at the wall are written,

$$[U_{p,\tau}]^{imp} = U_{p,\tau} \{Y_c\} - \frac{A Y_c}{\nu_p \{Y_c\}} [q_p^2]_{wall}$$

$$[q_p^2]^{imp} = q_p^2 \{Y_c\} - \frac{B Y_c}{K_p \{Y_c\}} \left([q_p^2]_{wall} \right)^{3/2}$$

Finally, the fictitious variables, used as Dirichlet wall boundary conditions, are directly written in terms of the computed variables at Y_c by assuming a low variation of the random particle kinetic energy between Y_c and $d_p/2$, so that:

$$[U_{p,\tau}]^{imp} = U_{p,\tau} \{Y_c\} - \frac{A Y_c}{\nu_p \{Y_c\}} q_p^2 \{Y_c\} \quad (\text{B.3})$$

$$[q_p^2]^{imp} = q_p^2 \{Y_c\} - \frac{B Y_c}{K_p \{Y_c\}} (q_p^2 \{Y_c\})^{3/2} \quad (\text{B.4})$$

According to part 3.3, the Johnson & Jackson's rough wall boundary conditions can be written in the following generic forms:

$$\left(\nu_p \frac{\partial U_{p,\tau}}{\partial n} \right)_{wall} = A [g_0]_{wall} [U_{p,\tau}]_{wall} \left([q_p^2]_{wall} \right)^{1/2} \quad (\text{B.5})$$

$$\begin{aligned} \left(K_p \frac{\partial q_p^2}{\partial n} \right)_{wall} &= - A [g_0]_{wall} ([U_{p,\tau}]_{wall})^2 \left([q_p^2]_{wall} \right)^{1/2} \quad (\text{B.6}) \\ &+ B [g_0]_{wall} \left([q_p^2]_{wall} \right)^{3/2} \end{aligned}$$

where A and B are two given parameters of the modelling approach.

According to the numerical approach implemented in NEPTUNE_CFD, the solid wall shear stress and random kinetic energy wall flux are written in the numerical code approach as,

$$\begin{aligned} \nu_p \{Y_c/2\} \frac{U_{p,\tau} \{Y_c\} - [U_{p,\tau}]^{imp}}{Y_c} &= A [g_0]_{wall} [U_{p,\tau}]_{wall} \left([q_p^2]_{wall} \right)^{1/2} \\ K_p \{Y_c/2\} \frac{q_p^2 \{Y_c\} - [q_p^2]^{imp}}{Y_c} &= - A [g_0]_{wall} ([U_{p,\tau}]_{wall})^2 \left([q_p^2]_{wall} \right)^{1/2} \\ &+ B [g_0]_{wall} \left([q_p^2]_{wall} \right)^{3/2} \end{aligned}$$

As previously, the effective particle viscosity and diffusivity used in the frame of the numerical code approach for the flux computation in the diffusion step

resolution method are chosen equal to the computed value at Y_c and the fictitious imposed values of the mean particle velocity and random kinetic energy are written,

$$\begin{aligned} [U_{p,\tau}]^{imp} &= U_{p,\tau} \{Y_c\} \\ &\quad - \frac{A Y_c}{\nu_p \{Y_c\}} [g_0]_{wall} [U_{p,\tau}]_{wall} \left([q_p^2]_{wall} \right)^{1/2} \\ [q_p^2]^{imp} &= q_p^2 \{Y_c\} \\ &\quad + \frac{A Y_c}{\nu_p \{Y_c\}} [g_0]_{wall} ([U_{p,\tau}]_{wall})^2 \left([q_p^2]_{wall} \right)^{1/2} \\ &\quad - \frac{B Y_c}{K_p \{Y_c\}} \left([q_p^2]_{wall} \right)^{3/2} \end{aligned}$$

The above Dirichlet wall boundary conditions are written in practice assuming a low variation of the random particle kinetic energy between Y_c and $d_p/2$: $[q_p^2]_{wall} = q_p^2 \{Y_c\}$ and by computing the pair distribution function using the solid volume fraction computed at Y_c : $[g_0]_{wall} = g_0 \{Y_c\}$. But, in contrast, specific numerical sensitivity analysis, carried out with the numerical code, have shown that the computation of $[U_{p,\tau}]_{wall}$, the "true" mean translation particle velocity at the distance $d_p/2$ from the wall, needs special care, especially for large roughness effects corresponding to large value of $A^* = AY_c g_0 \sqrt{q_p^2} / \nu_p$ (when A^* is in the order of or larger than 1).

So, an approximation of $[U_{p,\tau}]_{wall}$ is derived from the solid wall shear stress written in terms of the mean particle translation velocity defined at Y_c and $d_p/2$ using the values predicted at Y_c for the solid viscosity, pair distribution function and random particle kinetic energy:

$$\nu_p \{Y_c\} \frac{U_{p,\tau} \{Y_c\} - [U_{p,\tau}]^{imp}}{Y_c - d_p/2} = A [g_0]_{wall} [U_{p,\tau}]_{wall} \left([q_p^2]_{wall} \right)^{1/2}$$

then, the mean tangential velocity of the particles in contact with the wall

is written,

$$[U_{p,\tau}]_{wall} = U_{p,\tau} \{Y_c\} \left[1 + \frac{A(Y_c - d_p/2)}{\nu_p \{Y_c\}} g_0 \{Y_c\} (q_p^2 \{Y_c\})^{1/2} \right]^{-1} \quad (\text{B.7})$$

Finally, using the above equation for $[U_{p,\tau}]_{wall}$, the fictitious variables, used as Dirichlet wall boundary conditions, may be written in terms of computed variables at Y_c only by using the following equations,

$$[U_{p,\tau}]^{imp} = U_{p,\tau} \{Y_c\} \quad (\text{B.8})$$

$$[q_p^2]^{imp} = q_p^2 \{Y_c\} + \frac{A Y_c}{K_p \{Y_c\}} g_0 \{Y_c\} ([U_{p,\tau}]_{wall})^2 (q_p^2 \{Y_c\})^{1/2} - \frac{B Y_c}{K_p \{Y_c\}} (q_p^2 \{Y_c\})^{3/2} \quad (\text{B.9})$$