

## Zoning technique for a broadband fishnet metamaterial lens

Orazbayev, B.; Pacheco-Peña, V.; Torres, V; Navarro-Cia, Miguel; Beruete, M.

DOI:

[10.1109/IRMMW-THz.2015.7327405](https://doi.org/10.1109/IRMMW-THz.2015.7327405)

License:

None: All rights reserved

*Document Version*

Peer reviewed version

*Citation for published version (Harvard):*

Orazbayev, B, Pacheco-Peña, V, Torres, V, Navarro-Cia, M & Beruete, M 2015, Zoning technique for a broadband fishnet metamaterial lens. in *2015 40th International Conference on Infrared, Millimeter, and Terahertz waves (IRMMW-THz)*. Institute of Electrical and Electronics Engineers (IEEE), pp. 1-2.  
<https://doi.org/10.1109/IRMMW-THz.2015.7327405>

[Link to publication on Research at Birmingham portal](#)

### General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

### Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# Zoning Technique for a Broadband Fishnet Metamaterial Lens

Bakhtiyar Orazbayev<sup>1</sup>, Victor Pacheco-Peña<sup>1</sup>, Victor Torres<sup>1</sup>, Miguel Beruete<sup>1</sup> and Miguel Navarro-Cía<sup>2,3</sup>

<sup>1</sup>Antennas Group-TERALAB, Universidad Pública de Navarra, Pamplona 31006, Spain

<sup>2</sup>Optical and Semiconductor Devices Group, Department of Electrical and Electronic Engineering, Imperial College London, London SW7 2BT, UK

<sup>3</sup>Ultrafast Laser Laboratory, Department of Electronic and Electrical Engineering, University College London, London WC1E 7JE, UK

**Abstract**—The profile of any lens can be reduced by applying a zoning technique, at the expense of a narrower frequency range. Here, using an optimized zoning technique, a slim broadband zoned fishnet metamaterial lens with fractional bandwidth of 8.5% is designed, fabricated and measured at millimeter waves. Measurements are in good accordance with simulation results and demonstrate good performance of the zoned fishnet metamaterial lens. A high directivity of 16.6 dBi is experimentally achieved in the lens antenna system.

## I. INTRODUCTION

THE control of light propagation continues to be one of the most popular research fields in electromagnetism.

Historically this mission was entrusted to metals and natural dielectrics. However the use of conventional dielectrics to tailor the shape of electromagnetic waves is limited by the natural available permittivity and permeability values. Also their impedance mismatch and absorption losses make them less attractive for practical applications in the millimeter-wave and terahertz ranges. With the appearance of artificial dielectrics [1], and more recently metamaterials [2], researchers have gained more possibilities for designing classical beam shaping devices, such as lenses [3], beam steerers [4] and even cloaking devices [5]. The fishnet metamaterial is one of such promising metamaterials, which is suitable for microwave-to-terahertz frequencies, with low absorption losses, frequency-robust magnetic response and good impedance matching with air [6]–[8].

As a practical demonstration of its potential for millimeter-waves applications, fishnet-based lenses have been designed and experimentally analyzed at  $\sim 60$  GHz [9]–[11]. Subsequently a zoning technique, well-known for centuries and used at the beginning primarily in optics [12], has been successfully applied for such metamaterial lenses [13]. It makes possible to reduce significantly the volume and, therefore, minimize losses and weight of the lens, at the cost of narrowing the frequency operation band.

Here we demonstrate that the frequency span of zoned fishnet lenses can be broadened without affecting their performance, by applying a smart combination of the zoning technique and lens profile optimization [14]. The designed and fabricated fishnet metamaterial was measured at two frequencies demonstrating a diffraction-limited  $\sim 0.8\lambda_0$  transverse resolution for both foci. A lens antenna configuration showed directivity above 15 dB for both frequencies.

## II. RESULTS

The profile of the zoned fishnet metamaterial lens was

obtained using an improved zoning technique, which exploits a strong dispersion of the fishnet and minimizes the root-mean-square-error between the smooth analytical profile and its staircase approximation (defined by the fishnet unit cell) for the whole band. The performance of the obtained optimized lens design was analyzed in lens and lens-antenna configurations. To this end, the zoned fishnet metamaterial lens was fabricated, measured, analytically and numerically studied at two frequencies,  $f_1 = 54$  GHz and  $f_2 = 55.5$  GHz.

Numerical and experimental results regarding the focusing performance are presented in Fig. 1. The experimental study showed a focal length of 48.5 mm and 51.5 mm for the first and second frequency, respectively, and a full width at half maximum of  $0.7\lambda_1$  and  $0.9\lambda_2$  for the first and second frequency respectively. All results demonstrate a good agreement with the design parameters.

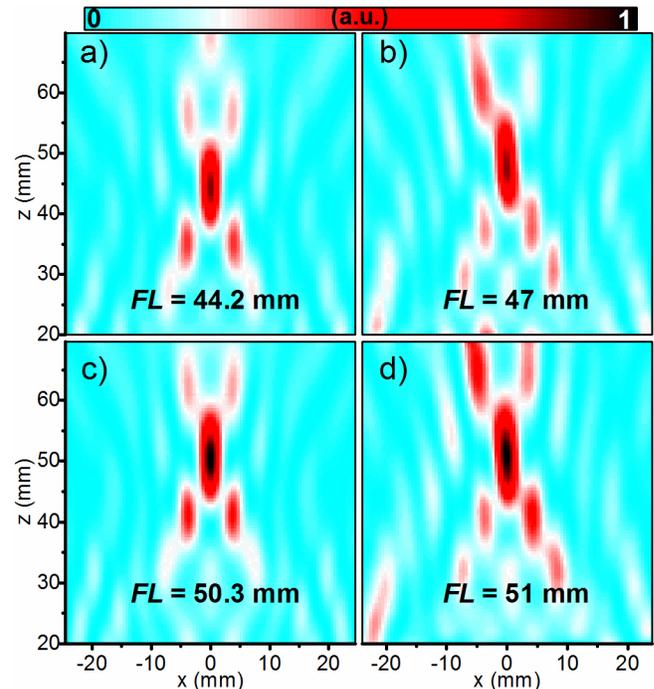


Fig. 1. Numerical (left column) and experimental (right column) color-maps for power distribution at  $xz$ -plane for  $f_1 = 54$  GHz (a, b) and  $f_2 = 55.5$  GHz (c, d).

In order to confirm the broadband performance of the designed lens, the maximum enhancement of 11.2 dB has been numerically obtained in the frequency range 52.5–58.25 GHz for this lens and a previously reported single-band zoned lenses [13] (See Fig. 2). The fractional bandwidth  $FBW = 8.5\%$  is confirmed for broadband zoned lens, where the

enhancement is above the -3dB level (from the peak value). The single-band zoned lens presented in Ref. 8 achieved  $FBW = 4.9\%$ .

With regard to the radiation performance in a lens antenna configuration, side lobes of 6.7 dB below the main lobe were found at  $\pm 7$  deg for both frequencies. The beamwidth for the first and second band was 3.5 and 4.3 deg respectively. Both numerical and experimental results show directivities of the lens antenna above 15 dB for both frequencies in accordance with full-wave simulations.

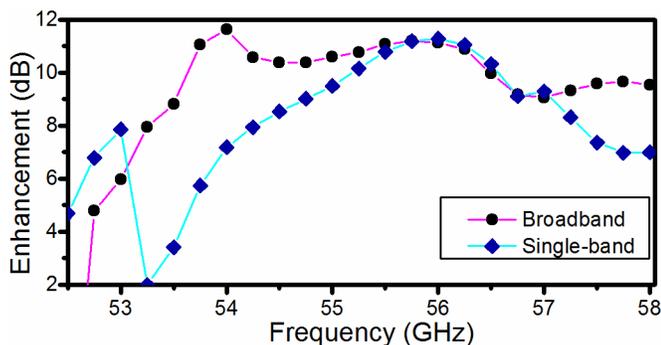


Fig. 2. Enhancement spectra for the improved broadband (pink line, circle symbol) and single-band designs (cyan line, rhombus symbol).

### III. CONCLUSIONS

A broadband zoned fishnet metamaterial lens has been designed, fabricated and measured at the V-band of millimeter-waves. The performance of the zoned lens has been analyzed numerically and verified experimentally, demonstrating broadband regime and good agreement with design parameters. The low-profile and weight of the zoned lens with millimeter-wave broadband response demonstrates a possibility to work in integrated systems with good performance compared to other conventional diffractive optical devices.

### ACKNOWLEDGMENTS

This work was supported in part by the Spanish Government under contract Consolider Engineering Metamaterials CDS2008-00066 and contract TEC2011-28664-C02-01. V.P.-P. is sponsored by Spanish Ministerio de Educación, Cultura y Deporte under grant FPU AP-2012-3796. B. O. is sponsored by Spanish Ministerio de Economía y Competitividad under grant FPI BES-2012-054909. V. T. is sponsored by the Universidad Pública de Navarra. M. B. is sponsored by the Spanish Government via RYC-2011-08221. M. N.-C. is supported by the Imperial College Junior Research Fellowship.

### REFERENCES

[1] W. Rotman, "Plasma simulation by artificial dielectrics and parallel-plate media," *IRE Trans. Antennas Propag.*, vol. 10, no. 1, pp. 82–95, Jan. 1962.  
 [2] R. Marqués, F. Martín, and M. Sorolla, *Metamaterials with negative parameter: theory, design, and microwave applications*. John Wiley & Sons, 2008.

[3] J. B. Pendry, "Negative Refraction Makes a Perfect Lens," *Phys. Rev. Lett.*, vol. 85, no. 18, pp. 3966–3969, Oct. 2000.  
 [4] V. Pacheco-Peña, V. Torres, M. Beruete, M. Navarro-Cía, and N. Engheta, "ε-near-zero (ENZ) graded index quasi-optical devices: steering and splitting millimeter waves," *J. Opt.*, vol. 16, no. 9, p. 094009, Sep. 2014.  
 [5] D. Schurig, J. J. Mock, B. J. Justice, S. A. Cummer, J. B. Pendry, A. F. Starr, and D. R. Smith, "Metamaterial electromagnetic cloak at microwave frequencies," *Science*, vol. 314, no. 2003, pp. 977–980, 2006.  
 [6] M. Beruete, M. Sorolla Ayza, and I. Campillo, "Left-handed extraordinary optical transmission through a photonic crystal of subwavelength hole arrays," *Opt. Express*, vol. 14, no. 12, p. 5445, 2006.  
 [7] M. Navarro-Cía, C. García-Meca, M. Beruete, A. Martínez, and M. Sorolla Ayza, "Dual-band double-negative-index fishnet metamaterial at millimeter-waves," *Opt. Lett.*, vol. 36, no. 21, pp. 4245–4247, Nov. 2011.  
 [8] C. García-Meca, J. Hurtado, J. Martí, A. Martínez, W. Dickson, and A. V. Zayats, "Low-loss multilayered metamaterial exhibiting a negative index of refraction at visible wavelengths," *Phys. Rev. Lett.*, vol. 106, no. 6, pp. 1–4, 2011.  
 [9] M. Beruete, M. Navarro-Cía, M. Sorolla Ayza, and I. Campillo, "Planoconcave lens by negative refraction of stacked subwavelength hole arrays," *Opt. Express*, vol. 16, no. 13, pp. 9677–9683, Jun. 2008.  
 [10] M. Navarro-Cía, M. Beruete, I. Campillo, and M. Sorolla Ayza, "Beamforming by Left-Handed Extraordinary Transmission Metamaterial Bi- and Plano-Concave Lens at Millimeter-Waves," *IEEE Trans. Antennas Propag.*, vol. 59, no. 6, pp. 2141–2151, Jun. 2011.  
 [11] M. Navarro-Cía, M. Beruete, I. Campillo, and M. Sorolla, "Enhanced lens by ε and μ near-zero metamaterial boosted by extraordinary optical transmission," *Phys. Rev. B - Condens. Matter Mater. Phys.*, vol. 83, no. 11, pp. 115112–1–5, Mar. 2011.  
 [12] I. V. Minin and O. Minin, *Diffractive Optics of Millimetre Waves*. CRC Press, Bristol, 2004.  
 [13] V. Pacheco-Peña, B. Orazbayev, V. Torres, M. Beruete, and M. Navarro-Cía, "Ultra-compact planoconcave zoned metallic lens based on the fishnet metamaterial," *Appl. Phys. Lett.*, vol. 103, pp. 183507–1–12, 2013.  
 [14] B. Orazbayev, V. Pacheco-Peña, M. Beruete, M. Navarro-Cía, and M. Navarro-Cía, "Exploiting the Dispersion of the Double-Negative-Index Fishnet Metamaterial to Create a Broadband Low-Profile Metallic Lens," *Opt. Express*, vol. 23, no. 7, p. 8555, Mar. 2015.