

# Study of particulate matter and gaseous emissions in gasoline direct injection engine using on-board exhaust gas fuel reforming

Bogarra Macias, Maria; Herreros, Jose; Tsolakis, Athanasios; York, Andrew ; Millington, Paul

DOI:

[10.1016/j.apenergy.2016.07.100](https://doi.org/10.1016/j.apenergy.2016.07.100)

License:

Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

*Document Version*

Peer reviewed version

*Citation for published version (Harvard):*

Bogarra Macias, M, Herreros, J, Tsolakis, A, York, A & Millington, P 2016, 'Study of particulate matter and gaseous emissions in gasoline direct injection engine using on-board exhaust gas fuel reforming', *Applied Energy*, vol. 180, pp. 245-255. <https://doi.org/10.1016/j.apenergy.2016.07.100>

[Link to publication on Research at Birmingham portal](#)

**Publisher Rights Statement:**

Checked 5/8/2016

**General rights**

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

**Take down policy**

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# STUDY OF PARTICULATE MATTER AND GASEOUS EMISSIONS IN GASOLINE DIRECT INJECTION ENGINE USING ON-BOARD EXHAUST GAS FUEL REFORMING

M. Bogarra<sup>a</sup>, J.M. Herreros<sup>a</sup>, A. Tsolakis<sup>a</sup>, A.P.E. York<sup>b</sup>, P.J. Millington<sup>b</sup>

<sup>a</sup>*School of Mechanical Engineering, University of Birmingham, Edgbaston, B15 2TT, UK*

<sup>b</sup>*Johnson Matthey Technology Centre, Blount's Court, Sonning Common, Reading RG4 9NH, UK*

## ABSTRACT

Gasoline Direct Injection (GDI) engines provide advantages over preceding spark ignition engine technologies in terms of reduced fuel consumption, increased power output and CO<sub>2</sub> depletion. However, the main drawback is the increased level of Particulate Matter (PM) emissions, which is associated with the adverse effects on human health and the environment.

GDI engine's fuel economy can further be enhanced by exhaust gas fuel reforming, a thermochemical recovery technique, which utilizes the engine exhaust gas heat, CO<sub>2</sub> and H<sub>2</sub>O to produce a hydrogen-rich gas named reformat. Furthermore, additional benefits in gaseous emissions can be achieved through the combustion of reformat. In this investigation, a prototype on-board fuel reformer has been employed in a GDI engine to study the effects of reformat combustion as a supplementary fuel to gasoline on PM and gaseous emissions. Between 5-6% reduction in the engine fuel consumption was achieved by using the fuel reformer. The different effects (i.e. dilution, thermal, chemical, etc.) of the reformat combustion on the PM nature and gaseous emissions has been identified. It was found that the reformat combustion can decrease notably the engine PM emissions, however, the reduction is dependent on the PM nature. Reformat combustion was found to remove soot cores more efficiently than the volatile PM. The study has shown that the three-way catalytic converter (TWC) can reduce PM emissions. The possible interactions between the reformat and the TWC operation have also been analyzed. For the studied conditions, fuel reforming technology has not shown significant detrimental influence on the TWC operation.

**Keywords:** GDI, PM characterization, EGR, REGR, hydrogen, TWC, gaseous emissions.

## 1. INTRODUCTION

The multiple advantages of Gasoline Direct Injection (GDI) engines have positioned this technology as the current trend for gasoline powertrains [1, 2]. Amongst GDI benefits, the increased power output, and improved engine efficiency [1, 3, 4] are the most advantageous. Therefore, GDI engines are framed in the drive for more efficient technologies and in the reduction of anthropogenic greenhouse gas emissions from transportation. However, the major concern about GDI engines is the increased particulate matter (PM) emissions compared to their counterparts Port Fuel Injection (PFI) engines [5, 6]. PM composition can vary depending on the engine operating condition. In the case of stoichiometric GDI engine operation, with optimized fuel injection timing, the PM formed contains a low level of soot. However, there are some circumstances, such as in cold start operation, which could lead to higher rates of soot formation due to the large liquid fuel droplets formation and spray impingement. In the case of lean GDI engine operation, stratified charge promotes increased levels of soot as a result of the rich in fuel regions in the combustion

chamber [7]. PM negative effects on human health and the environment have been broadly studied. In the work carried out by Jarvis et al [8], the carcinogenic and mutagenic behavior of polyaromatic hydrocarbons (PAHs) adsorbed in the carbonaceous core (soot) of PM is reported. Furthermore, researchers have provided evidence to link PM exposure to asthma and respiratory issues and cardiopulmonary morbidity and mortality [9-13]. As a result of the awareness of PM hazardous effects, upcoming legislation, such the European Euro 6c, will strictly limit the particle number emitted to  $6 \times 10^{11}$  #/km for GDI engines from September 2017.

Despite the technical advances in the automotive sector, still between 20-40% of fuel energy is wasted in the engine exhaust [14, 15] with a 6% exergy content available [16]. With the aim of improving overall engine's efficiency, different techniques for exhaust energy recovery have been extensively researched in the literature such as thermoelectrical generators [17, 18] and Rankine cycles [19, 20]. In addition to thermal recovery, catalytic techniques offer the possibility of utilizing products from engine combustion, water and CO<sub>2</sub>. A fuel injection is required in order to produce endothermic reactions (thermal recovery) with CO<sub>2</sub> and water to produce hydrogen and CO (chemical recovery). Substantial efforts in reforming modelling have been made to understand the influence of the type of catalyst [21], C/O ratio [21] and reforming fuel type [22-24] on reforming pathways, hydrogen production and process efficiency. For instance, it has been concluded that in the case of short chain length alcohol fuels reforming lower temperatures are required when compared to gasoline due to the alcohols rapid and strong adsorption, high reactivity, high diffusivity, high H/C ratio and steric hindrance [25, 26].

Hydrogen combustion can lead to further advantages in engine performance and emissions. For example, its high diffusion coefficient, high flame speed and smaller quenching distance enhances the combustion, reducing both PM mass and number [16]. In addition, the presence of H<sub>2</sub> promotes the formation of OH radicals, which reduces the soot formation rate [17] and enhances soot oxidation [18]. Hydrogen combustion could also raise the in-cylinder temperature, which can enhance PM oxidation [18] but at the same time can increase NO<sub>x</sub> emissions [19, 20]. Despite these benefits, safety reasons due to abnormal hydrogen combustion (e.g. surface ignition and backfiring) and the low energy density in terms of volume of hydrogen hinders its use in mobile applications due to well-known storage challenges [21, 22]. Therefore, exhaust gas fuel reforming could be a feasible approach to introduce hydrogen in transportation and overcome the challenge of hydrogen storage.

Reformed exhaust gas recirculation (REGR) has been extensively studied for diesel engines [27] and PFI engines using bottled reformer gas [28, 29] and plasmatron reformer [30]. Recently, the studies have also been extended to GDI engines [31] and benefits of simulated reformat have been compared to conventional EGR [32]. High rates of EGR in gasoline engines are currently under investigation as they lower NO<sub>x</sub> emissions [33] and improves fuel economy [33-36] due to the reduced pumping losses [34, 37]. EGR worsens combustion stability which could be partially counteracted in the case of REGR by the hydrogen combustion within the REGR stream. Therefore, the combination of exhaust thermochemical recovery, EGR and hydrogen combustion could further reduce engine fuel consumption while maintaining combustion stability. In addition, tcomponents (H<sub>2</sub>, CO, CO<sub>2</sub> and HCs) as part of REGR leads to further

advantages in the engine out gaseous emission [32, 38]. For instance, Ji et al [39] reported a 5% increase in thermal efficiency when a 2.4% CO+H<sub>2</sub> was fed to the engine as well as a reduction in NO<sub>x</sub> and THC.

The overall effects of REGR in gasoline engines have been examined [32, 38] however, it is still not clear what are the independent effects of EGR and actual reformat combustion on engine performance and emissions including both gaseous and PM. Therefore, in this study, actual reformat has been produced in an on-board prototype exhaust gas fuel reformer incorporated in the EGR loop of a modern GDI engine. For first time, the effects of high diluted EGR/REGR on engine fuel economy, combustion characteristics, gaseous emissions and most importantly on PM emissions have been identified. The presence of different PM types (soot cores similar to diesel and “slurry-like” particles) has previously been seen in the GDI exhaust [40, 41]. Depending on the nature of particles the effects of hydrogen combustion, REGR or EGR can be different. For this reason, two injection timings have been used as a tool to obtain the two types of PM, one with a high volatile organic material (VOC) nature and one with sooty nature. The independent effects related to REGR (dilution, thermal, chemical and spark timing) have been studied in isolation. Also, the effect over the three-way catalyst (TWC) was analyzed to find possible synergies or inhibitions between on-board reforming and conventional aftertreatment systems.

## 2. EXPERIMENTAL SETUP AND METHODOLOGY

### 2.1 Experimental setup

The engine used for this study is a stoichiometric 2 L, 4-cylinder, air-guided GDI engine. A steady state engine operation was selected: 2100±2 rpm and 60±1 Nm that corresponds to a low load mode: 4.7±0.3 bar indicated mean effective pressure (IMEP) representative of urban driving conditions. A Heated Exhaust Gas Oxygen (HEGO) sensor was used for oxygen measurement. The details of the engine specification can be found in Table 1. An AVL miniature piezo-electric pressure transducer model GM12D and a single channel piezo amplifier referenced to the engine cycle using a Baumer 720 pulse per revolution magnetic rotary encoder were used for in-cylinder pressure measurements. An average of 200 cycles was considered for in-cylinder pressure analysis. Fuel consumption was obtained with a Rheonik RM015 Coriolis fuel flow meter. Part of the OEM’s engine calibration strategy for reduced pumping losses is the utilization of valve overlap to increase the residuals (internal EGR) (intake valve opening timing 11 CAD bTDC, exhaust valve closing timing 57 CAD aTDC). The exhaust valve closing timing was modified to 8 CAD bTDC to avoid the influence of the internal EGR in PM and gaseous emissions. Standard EN228 gasoline with 5% (v/v) ethanol content provided by Shell has been used for this research. The same batch was used throughout this investigation. Fuel properties are presented in Table 2.

Table 1. Engine specifications.

Compression ratio	10:1
Bore x stroke	87.5 x 83.1 mm
Turbocharger	Borg Warner k03
Rated power	149 kW at 6000 rpm
Rated torque	300 Nm at 1750-4500 rpm

Table 2. Gasoline properties.

Analysis (Test method)	Result
Density at 15°C (kg/m <sup>3</sup> )	743.9
IBP (°C)	34.6
20% v/v (°C)	55.8
50% v/v (°C)	94.0
FBP (°C)	186.3
C m/m (%)	84.16
H m/m (%)	13.48
O m/m (%)	2.36
Paraffins v/v (%)	43.9
Olefins v/v (%)	11.7
Naphthenes v/v (%)	7.8
Aromatics v/v (%)	26.9
Oxygenates v/v (%)	7.7
Sulfur (RFA) m/m (ppm)	6
Lower heating value (MJ/kg)	42.22
MON	85.3
RON	96.5

The aftertreatment system is composed of a commercial TWC which meets the Euro 6 legislation and an on-board reformer designed by Johnson Matthey consisting of five metallic plates coated with Pt–Rh based catalyst. For the reforming process, part of the exhaust gas flow before the TWC was diverted to the catalytic input of the reformer. In this stream, gasoline was injected for the reforming reactions. The rest of the exhaust stream was treated by the TWC and then used for the second inlet of the reformer to heat up the reforming catalyst. Heat exchange, but not mass exchange, is produced in the reformer between both exhaust gas streams, increasing the temperature of the catalyzed exhaust+gasoline stream and therefore, promoting endothermic reforming reactions between the gasoline and hot exhaust gas [31]. The reforming process products are mainly hydrogen and CO that are recirculated back to the engine intake. This process is known as REGR. A schematic of the engine reformer integrated system is shown in Figure 1 together with the experimental setup.

Legislated gaseous emissions (CO, CO<sub>2</sub>, NO<sub>x</sub> and THC) were measured using a Fourier Transform Infrared Spectroscopy (FTIR) 2100 MKS. The exhaust gas was filtered to avoid possible damage to the optical lenses of the FTIR by the PM and pumped to the equipment. To prevent the condensation of HCs and water, in the heated lines, they were maintained at 190°C. The FTIR has been also spanned using known concentrations of CO<sub>2</sub>, CO, NO and THC and a Horiba MEXA 7100DEGR gas analyser was used to remove experimental bias during this procedure. The lowest detection limits of the MultiGas 2030 FTIR analyser are 3.6 ppm for NO, 1.2 ppm for CO and lower than 1 ppm for the rest of species measured in this investigation.

Electrical mobility particulate size distribution (PSD) measurements were carried out using a TSI scanning mobility particle sizer (SMPS) composed by a series 3080 electrostatic classifier, a 3081 Differential Mobility Analyzer (DMA) and a 3775 Condensation Particle Counter (CPC). The sheath and aerosol flows were 10 and 1 liters per minute respectively. The upscan and downscan time were set to 90 and 30 seconds. PSD, for the parameters selected, ranges from 7.5 to 294 nm electrical mobility diameter. The dilution ratio (DR) was set at 11 using an ejector diluter system to precondition the sample for the SMPS measurement. PSDs were evaluated before three-way catalyst (bTWC), after three-way catalyst (aTWC) and in the reformer output to analyze the possible formation of PM in the reformer.

The hydrogen production downstream the reformer was evaluated by an HP 5890 Series 2 gas chromatograph (GC) coupled with a thermal conductivity detector (GC-TCD) and HP 3395 integrator. The carrier gas was argon and the detector was calibrated with 30% hydrogen in nitrogen. All the gaseous emissions have been converted to humid exhaust flow conditions.

A schematic of the experimental setup is presented in Figure 1. The dotted lines represent the sampling points for the SMPS, GC-hydrogen and FTIR respectively.

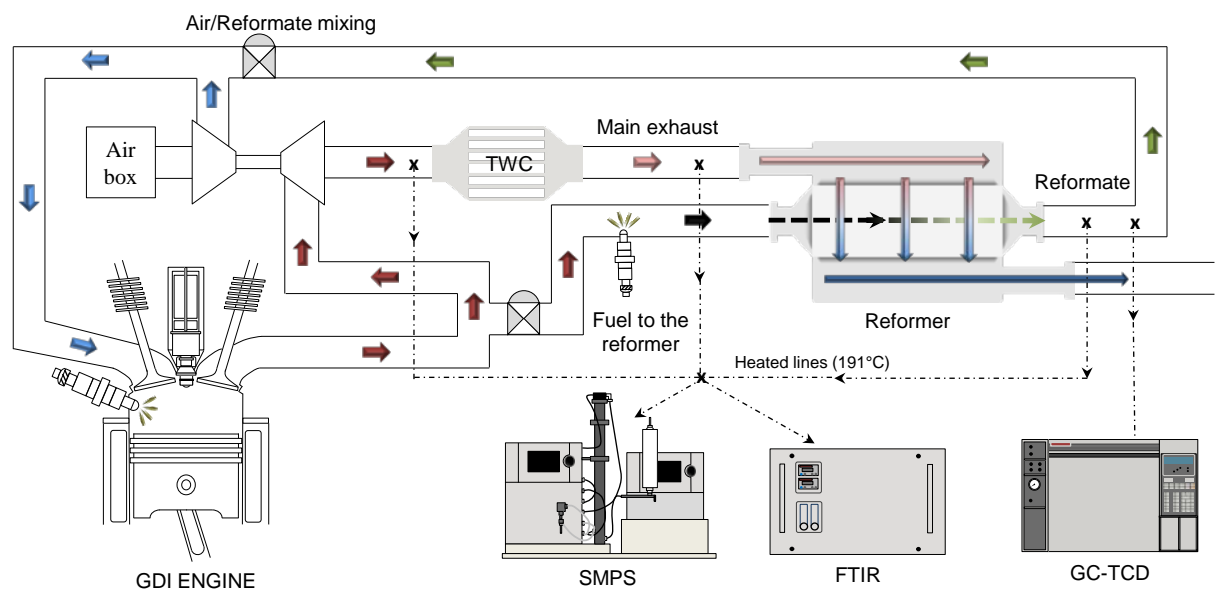


Figure 1. Schematic of the experimental setup.

## 2.2 Test procedure/Methodology

An analysis in fuel economy savings, combustion, PSD and gaseous emissions was carried out for high dilution rates of EGR and REGR at one steady state engine operation condition. As previously stated, one of the aims of this investigation is to examine the effect of EGR and REGR on PM nature. For this reason, two injection timings were analyzed which produced different PM nature: i) 303 CAD bTDC, the ECU injection, forming small nuclei and mostly VOC particulates and ii) 335 CAD bTDC, an advanced injection, producing highly sooty particulates due to the wall-piston wetting [42, 43]. The maximum percentage of EGR was used

for the analysis being 19% and 24% for 303 CAD bTDC and 335 CAD bTDC, respectively. The ST was adjusted to maintain the maximum position of in-cylinder pressure for EGR and REGR combustion in a  $\pm 3$  CAD window with respect to the baseline maximum peak pressure position. As the set spark timings are different depending on the operating condition (see Table 3) a spark timing screening was performed to identify its contribution in the reformate net effect on combustion and emissions. The screening was carried out from the ST of the EGR until the set ST of the REGR. Samples before and after the TWC as well as in the reformer output were analyzed for all the studied conditions.

Confidence intervals using a 95% confidence level which reflects the reliability and repeatability of the experiments have been calculated based on the results of more than 9 measurements taken for each condition. Those confidence intervals include scan-to-scan and day-to-day variability in the operating condition and have been included where legibility of the figure is not much affected. Prior to the test, the engine was warmed up, and the measurements started when  $95 \pm 0.5$  °C coolant and  $101 \pm 2$  °C oil temperatures were reached. The air stream temperature was maintained at  $40 \pm 2$  °C during the experiment to reduce the test-to-test variability. Fuel injection pressure and fuel injection rail temperature were maintained constant at  $60 \pm 2$  bar and  $75.5 \pm 0.5$  °C, respectively for both injection timings.

Table 3. Baseline, EGR and REGR percentage analyzed and ECU settings (spark timing and maximum pressure peak position).

	Injection timing CAD bTDC	EGR (%)	Spark timing CAD	Targeted position max in-cylinder pressure (CAD aTDC)
Baseline	303	0	24 (ECU)	16
	335	0	24 (ECU)	12
EGR	303	19	+ 8.25 <sup>(*)</sup>	16
	335	24	+ 17.25 <sup>(*)</sup>	12
REGR	303	19	+ 3.75 <sup>(*)</sup>	16
	335	24	- 0.25 <sup>(*)</sup>	12

<sup>(\*)</sup> + advance, - retard, spark timing with respect to ECU settings.

The reformate composition, on humid base, for both injection timings is presented in Table 4. Approximately 5% hydrogen production was measured at both injection timings for steady state conditions. The small difference in hydrogen levels for each injection may be due to the different gas hourly space velocity through the reformer. However, the H<sub>2</sub>/CO ratio is slightly higher for 335 CAD (H<sub>2</sub>/CO = 2.4) compared to 303 CAD (H<sub>2</sub>/CO = 2.2) injection timing. It is suggested that this is due to a higher utilization of the water present in the exhaust (either via steam reforming or/and water gas shift) than CO<sub>2</sub> (dry reforming) for the reformate production.

Table 4. Reformate composition.

	H <sub>2</sub> (%)	CO (%)	CO <sub>2</sub> (%)	H <sub>2</sub> O (%)
303 CAD bTDC	5	2.7	11	9
335 CAD bTDC	4.35	1.6	10.5	10.3

### 3. RESULTS AND DISCUSSION

### 3.1 Combustion parameters

Table 5 shows the combustion parameters obtained from in-cylinder pressure for both fuel injection timings for the noEGR, EGR and REGR operation. The IMEP was maintained constant at 4.7 bar and the COV of IMEP remained below 5% for all the conditions tested to assure stable combustion. The application of REGR enables retarding the ST while maintaining the same IMEP as well as reduces the COV of IMEP for all the spark timing tested with respect to EGR as a result of the high diffusivity and flame speed of hydrogen. As the ST was adjusted to maintain similar peak pressure position for baseline, EGR and REGR combustion, a screening was performed to identify the influence of ST in in-cylinder pressure trace, gaseous emissions and PM. This screening was carried out from the ST of the EGR until the original ST of the REGR condition. It can be observed that maintaining the position of the maximum peak pressure leads to lower peak pressure for the REGR condition. The same trend is obtained for both injection timings, being more noticeable for 335 CAD bTDC as the ST variation range was wider.

Table 5. Engine combustion parameters.

Injection timing	Dilution	Spark timing (CAD aTDC)	COV of IMEP (%)	IMEP	Position Pmax (CAD)	Pmax (bar)
303 CAD bTDC	noEGR	+ 24 (ECU)	2.03	4.7	16	27
	EGR	+ 32.25 (+ 8.25*)	4.35	4.71	16.5	25.28
	REGR	+ 32.25 (+ 8.25*)	4.63	4.7	14	24
		+ 27.75 (+ 3.75*)	3.33	4.62	15	25.37
335 CAD bTDC	noEGR	+ 24 (ECU)	1.2	4.71	12	31.37
	EGR	+ 41.25 (+ 17.25*)	5.22	4.69	13.5	28
	REGR	+ 41.25 (+ 17.25*)	3.25	4.61	11	28.64
		+ 33 (+ 9*)	1.73	4.68	13	27.35
		+ 23.25 (- 0.75*)	2.97	4.63	15	23.5

\* + advance, - retard, spark timing with respect to ECU settings.

### 3.2 Engine fuel consumption and energy efficiency

The brake specific fuel consumption (BSFC) for the two injection timings was recorded at the three conditions (noEGR, EGR and REGR). Fuel consumption is reduced by 3% when EGR is used for both injection timings. This fuel economy benefit with the use of EGR is mainly attributed to the reduction of pumping losses [35, 36], heat loss to the cylinder walls and the degree of dissociation occurring at high temperature burned gasses [37]. In addition, EGR can contribute to further fuel economy improvement at full load as a replacement of the fuel enrichment technique used to mitigate knock [34]. The addition of the reformat into the EGR loop while keeping the same spark timing settings as in the case of EGR decreased total fuel consumption. Moreover, when the ST is modified under the presence of the reformat gas further



improvements up to 5-6% in fuel economy are achieved. This percentage also takes into account the quantity of the fuel that was used in the reforming process (around 10% of the total fuel consumption). BSFC for REGR at 335 CAD bTDC is slightly higher than for the 303 CAD bTDC gasoline fuel injection timing. It is believed that as the EGR rate permitted by the engine is larger for 335 CAD bTDC, the gas hourly space velocity in the reformer is higher. Thus, the reforming process is less efficient when compared to 303 CAD bTDC injection timing (the ECU settings). As has been previously stated, this study has been done maintaining the dilution level and the peak of the maximum pressure constant to fairly compare EGR and REGR effect in gaseous and PM emissions. However, REGR combustion operation could be optimized (further rates of REGR are tolerated by the engine as the combustion stability is increased), resulting in an extra reduction in fuel consumption if reformer process efficiency is not significantly deteriorated [38].

### 3.3 Particulate Matter analysis at high diluted REGR conditions

The REGR effects on PSD for both fuel injection timings are presented in Figure 2. The measurements were taken before and after the TWC in order to analyze the performance of the TWC in PM.

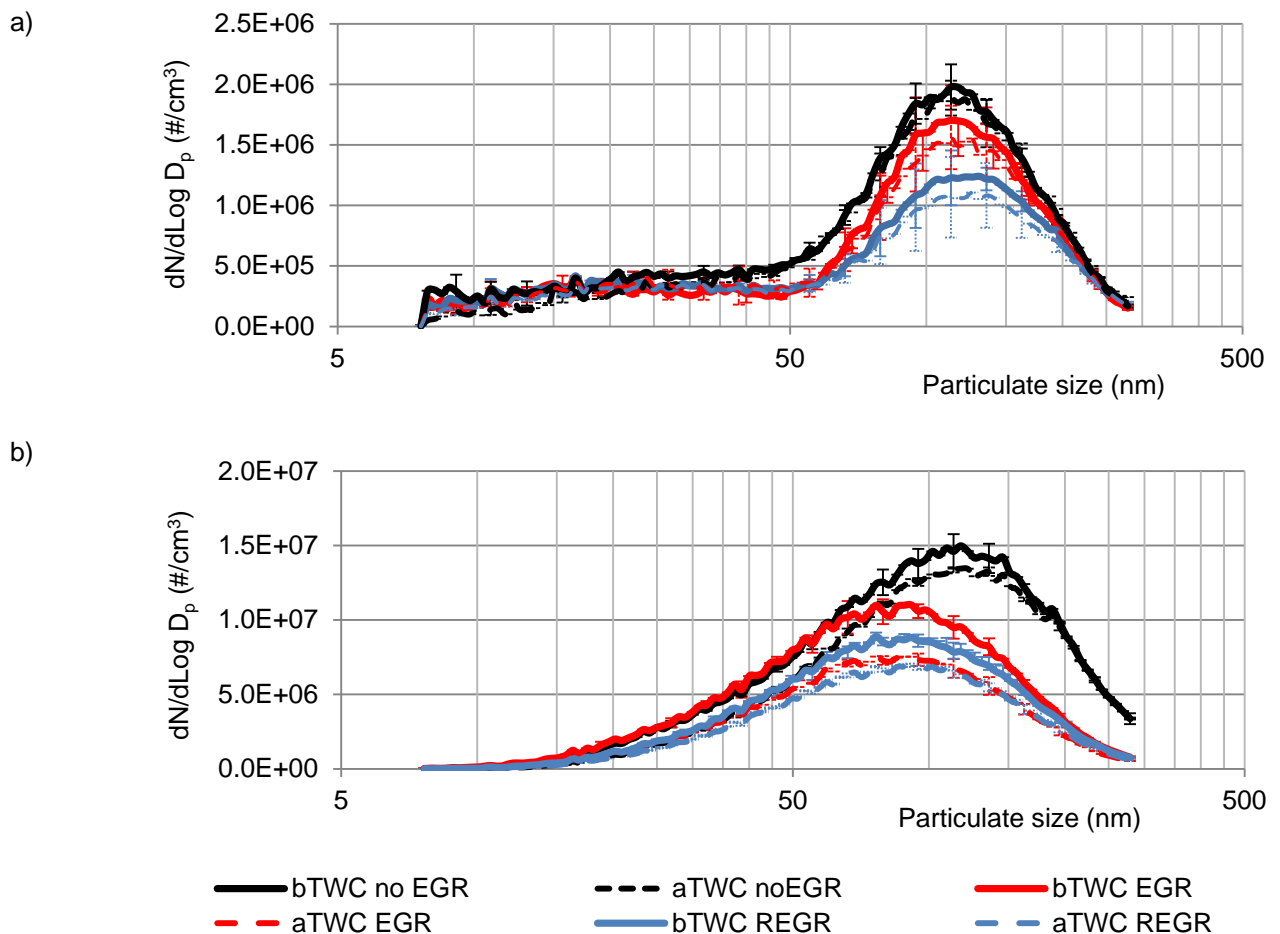


Figure 2. Effect of TWC on PSD for baseline, EGR and REGR operating conditions at a) 303 CAD bTDC injection timing and b) 335 CAD bTDC injection timing.

Independently of the injection timing, the REGR is able to reduce significantly PM with respect to baseline and EGR combustion. At 303 CAD bTDC, this reduction is produced vertically along the whole distribution,

being able to reduce even the concentration of small size particles. At 335 CAD bTDC, the PSD is further reduced but shifted to lower diameters (lower mean electrical mobility particulate size). Those results have several implications. They suggest, the reformer combustion prevents the formation of soot cores reducing the probability of collision and agglomeration of particles leading to a reduction in the agglomerate diameter, while a different growing mechanism for 303 CAD bTDC injection timing (volatile nature PM) occur as the reduction in the particle number concentration does not decrease the agglomerate size. These results also help to identify the different nature (based on composition) of the particulates emitted under 303 degree BTDC injection timing which have larger sizes compare to 335 CAD bTDC injection timing even though the particulate concentration is much lower. This is because at 303 CAD bTDC injection timing the growing mechanism of the agglomerates is mainly through the adsorption and condensation of volatile material to soot nuclei being the final agglomerate size independent of particle number concentration. The production of smaller size particles in the case of EGR and REGR compare to baseline combustion could be seen as a drawback as smaller particles can penetrate deeper into the respiratory system, they present higher reactivity (the ratio surface-volume is greater) and remain a longer time in the atmosphere. However, the reduction of the mean particulate size with REGR combustion is not due to an increase in the number of small particles but an important reduction in the number of large particles. Therefore, the concentration of particles for mobility diameters lower than 60 nm remained the same or even reduced being beneficial for the environment and human health. The different effects associated with REGR combustion which influences PM emissions are discussed below.

In order to maintain the same fuel/oxygen ratio for EGR and REGR operation with respect to the baseline condition, an increase in the mass of the inducted in-cylinder charge is required. This higher in-cylinder charge results in lower in-cylinder oxidant concentration [37] which promotes soot formation and slows down soot oxidation (dilution effect) but also reduces the in-cylinder temperatures inhibiting soot formation and oxidation (thermal effect). The higher hydrogen and CO concentration in REGR with respect to EGR and baseline combustion improves engine fuel economy and increases in-cylinder pressure and thus combustion temperature when the same spark timing is selected. Improved engine fuel economy also leads to a higher liquid fuel replacement by the reformat gas. As a result, the reduction of both local rich in fuel regions [38] and the overall carbonaceous content of the fuel inhibits soot precursors formation and growth. The increase in the in-cylinder temperature assists in HCs and PM precursor oxidation [38]. Furthermore, hydrogen inhibits soot nucleation [44] and promotes soot and soot precursors oxidation through the OH radical [45, 46]. On the other hand, the high recirculation of CO, in the case of REGR, reduces the oxygen and OH concentration available for soot oxidation to CO<sub>2</sub> [46]. In addition, the recirculation of particles within the EGR loop could increase engine output PM emissions [44, 45].

For first time, the effect of the reformat combustion in the formation and/or removal of particles has been investigated. PSDs were sampled upstream and downstream the reformer (Figure 4). At 303 CAD bTDC, the concentration of small particles is reduced in the reformer, while no effect is shown for particles larger than 55 nm. On the other hand, at 335 CAD bTDC, the particle distribution is reduced across the PSD range. Therefore, it can be concluded that the reformer does not act as a new source of PM and there is a certain but limited PM trapping effect by diffusion in the reformer catalyst.

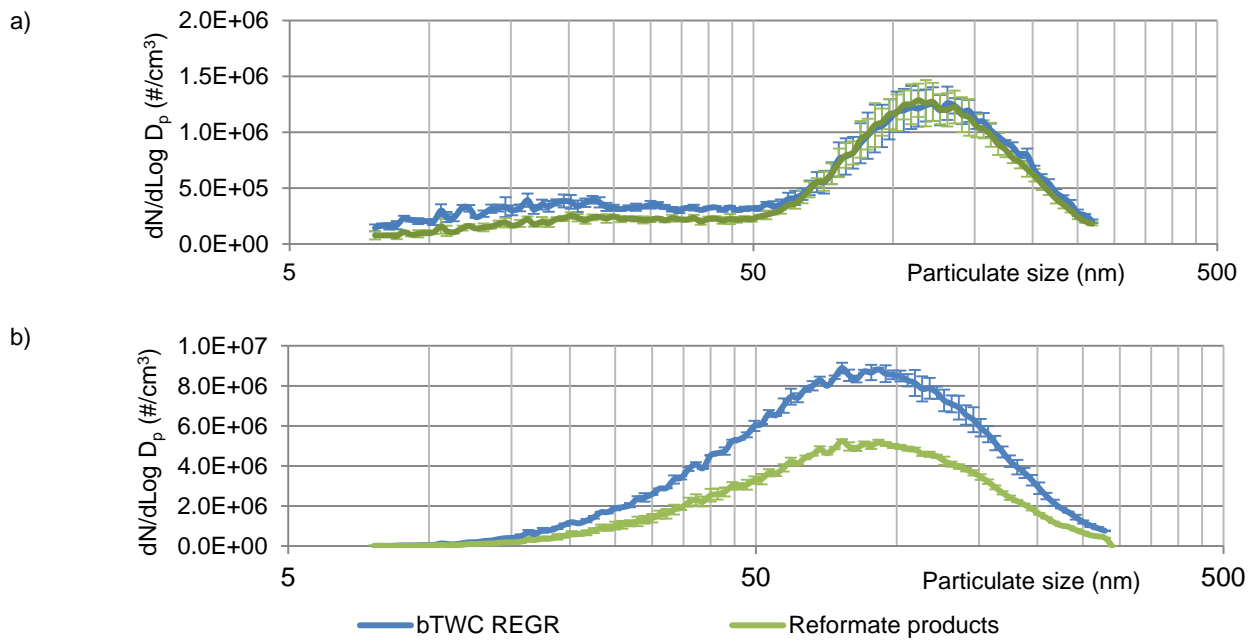
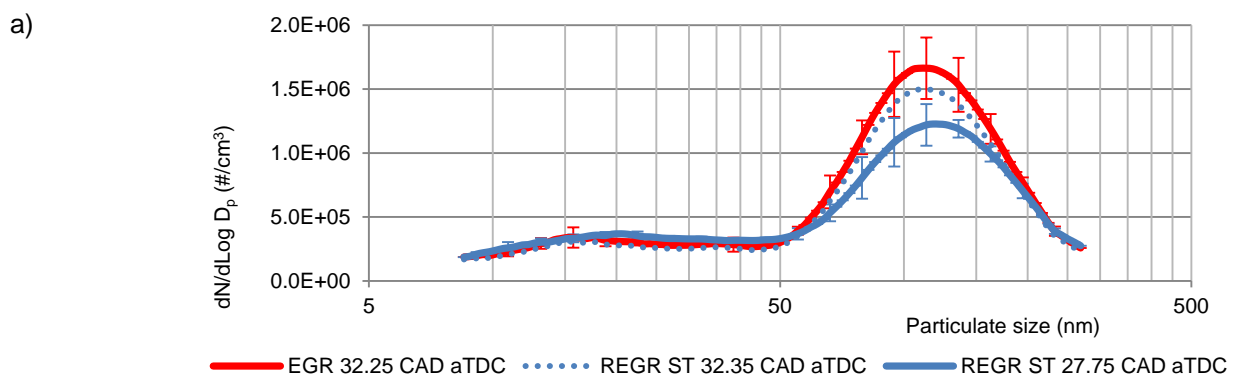


Figure 3. Effect of reformer on particulate size distributions at a) 303 CAD bTDC injection timing and b) 335 CAD bTDC injection timing.

The effect of spark timing on PM emissions has been also independently studied although no dependences are reported [46]. In Figure 4 as the spark timing is retarded the PM concentration is slightly reduced, especially the accumulation mode. Therefore, the advanced spark timing for EGR with respect to baseline hinders the EGR beneficial effects on PM. In the case of REGR combustion, as the particle emissions are lower compared to EGR at the same spark timing, as REGR operation permits retarding the spark timing, PM emissions are further reduced.. The reduction of PM for retarded spark timings is attributed to the increase in the available time for fuel-air mixture [47-49] and better fuel combustion efficiency associated to the retard in ST which compensates the possible inhibition on soot oxidation due to the lower combustion peak temperatures when spark timing is retarded [50].



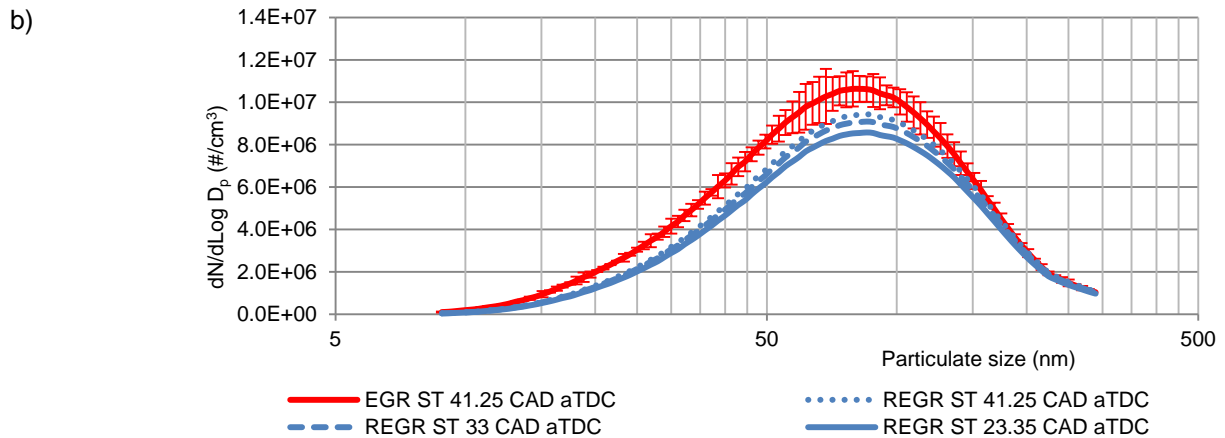


Figure 4. Effect of spark timing on particulate size distributions at a) 303 CAD bTDC and b) 335 CAD bTDC.

The relative importance of the different effects described above (i.e. dilution, thermal, chemical, etc.) depends on the EGR/REGR rate, the PM nature and level of soot formation and oxidation which are influenced by the fuel injection timing. For instance, in the case of a very advanced injection timing (335 CAD bTDC) the PM reduction of REGR with respect to EGR is more significant. It is thought that this is mainly due to the higher impact of the chemical effects of hydrogen on “diesel-like” soot production conditions when there is a higher presence of locally rich in fuel regions (e.g. piston wetting and pool fires) and the proportion of condensed/adsorbed hydrocarbons onto PM is lower. The contribution of those effects on PM is shown in Table 6.

The TWC reduces PM at advanced injection timing when most of the particulates consist of solid soot cores. However, the TWC had no effect on PM produced at 303 CAD bTDC fuel injection timing, opposed to the expected higher reduction due to the volatile nature of the PMs. The results suggest that those particulates are composed of HCs which are unable to be controlled in the TWC either by oxidation or filtration. Furthermore, the size of the particles for both injection timings is not significantly modified by the catalytic converter. Therefore, it seems that the TWC is just acting as a filter, trapping some solid particles deposited in its channels by diffusion. Further oxidation of those trapped particles is expected due to the high catalyst temperatures.

Table 6. Qualitative effects of EGR and REGR with respect to baseline condition performance in GDI engines.


EGR	PM		NO		CO		THC	
Injection timing	303	335	303	335	303	335	303	335
Dilution effect	↑↑	↑↑	↓↓	↓↓	↑	↑	↑	↑
Chemical	↓↑	↓	↓	↓	↓	↓	↑	↑
Thermal	↓↓↓	↓↓↓	↓↓↓	↓↓↓	↓↑	↓↑	↑	↑
Inlet temperature	↑	↑	↑	↑	↑	↑	↑	↑
Liquid fuel replacement	↓↓	↓↓	Minor effect	Minor effect	↓↓	↓↓	↓↓	↓↓
Spark timing	↑	↑	↑↑	↑↑	Minor effect	Minor effect	↑	↑
PM recirculation	Minor effect	Minor effect	No effect	No effect	No effect	No effect	No effect	No effect
Net Effect	↓	↓↓	↓↓↓	↓↓↓	↓	↓	↑	↑

REGR	PM		NO		CO		THC	
Injection timing	303	335	303	335	303	335	303	335
Dilution effect	↑↑	↑↑	↓↓	↓↓	↑	↑	↑	↑
Chemical	↓	↓↓	↓↑	↓↑	↓↓↑	↓↓↑	↑	↑
Thermal	↓↓	↓↓	↓	↓	↓	↓	↓	↓
Inlet temperature	↑	↑	↑	↑	↑	↑	↑	↑
Liquid fuel replacement	↓↓↓	↓↓↓	Minor effect	Minor effect	↓↓	↓↓	↓↓	↓↓
Spark timing	Minor effect	Minor effect	Minor effect	Minor effect	Minor effect	Minor effect	Minor effect	Minor effect
PM recirculation	Minor effect	Minor effect	No effect	No effect	No effect	No effect	No effect	No effect
Net Effect	↓↓↓	↓↓↓	↓↓	↓↓	↓↓	↓↓	≈	≈

### 3.4 Gaseous emissions analysis at high diluted REGR condition

The level of engine out gaseous emissions and their confidence intervals before and after the TWC for all the conditions studied are plotted in Figure 5. EGR and REGR are able to significantly reduce CO and NO concentration levels when compared to baseline operation for both fuel injection timings. In the case of REGR, such reductions are around 30% and 90%, respectively. The CO<sub>2</sub> concentration in the engine exhaust with REGR is not shown a clear trend and the values measured are within the confidence interval limits.”. It has to be noted that the results are shown in concentration. In the case of CO<sub>2</sub> emissions (in terms of g/kWh or g/km) the effects of EGR and REGR would be more significant as the reduction in the exhaust mass flow will be also taken into account.

a)

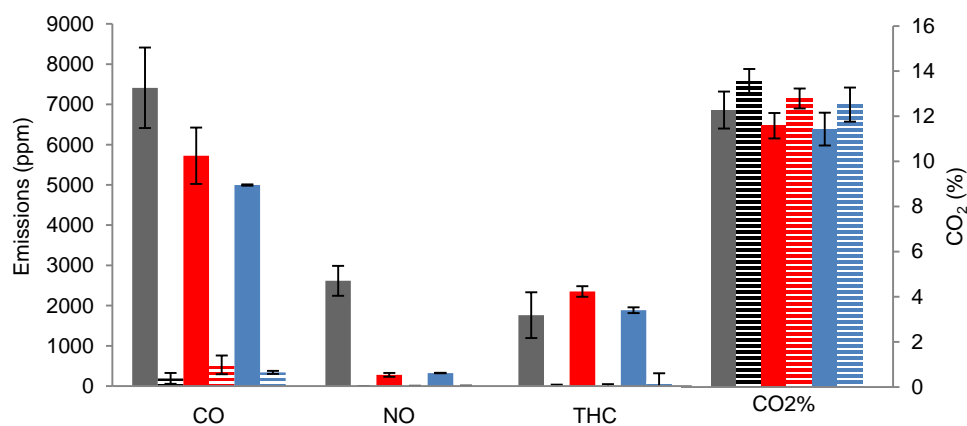

b)

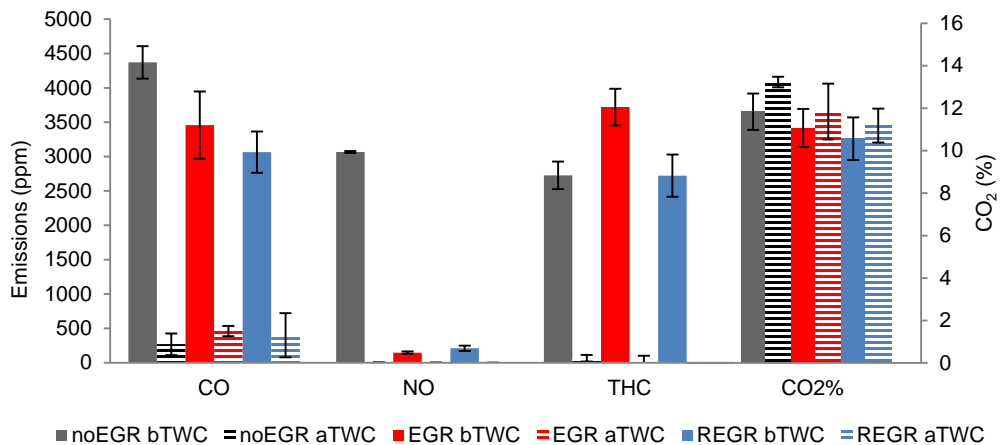


Figure 5. Engine gaseous emissions for baseline, EGR and REGR before and after TWC at a) 303 CAD bTDC and b) 335 CAD bTDC.

As REGR operation allows the use of retard ST, a ST sweep was performed in order to separate its effect in gaseous emissions and PM. Figure 6 shows the average variation rate of CO, THC and NO with respect to the EGR together with their confident interval. The screening starts from the ST of the EGR to the ST set for REGR based on peak pressure timing. CO and THC for REGR combustion are

reduced when compared to the EGR independently of the ST value, while NO emissions are generally higher for REGR. At 303 CAD, the emission differences between STs are not significant as they are within the confidence interval. However, at 335 CAD, where the screening window is larger the effects are more noticeable. CO concentration presents a bath-tube shape curve for 335 CAD bTDC where the ST is widely varied. It is thought that when ST is slightly retarded, the reduction in liquid fuel consumption resulted in a decrease in CO emissions, but when it is further delayed, the reduction of in-cylinder pressure and temperature enhanced incomplete combustion resulting in incomplete combustion of HCs to CO emissions. THC levels are reduced when the spark timing is retarded due to the higher end-gas temperature which promotes the HC oxidized fraction [51]. The trends of NO for both injection timings are similar but are more significant in the case of 335 CAD bTDC injection timing that the ST window is wider (Figure 6). The main reason for such reduction in NO is the lower in-cylinder pressure and temperature owned to the retarded ST. It has to be noted that lower NO concentration under REGR with respect the EGR combustion can be achieved when the ST is retarded to the set value.

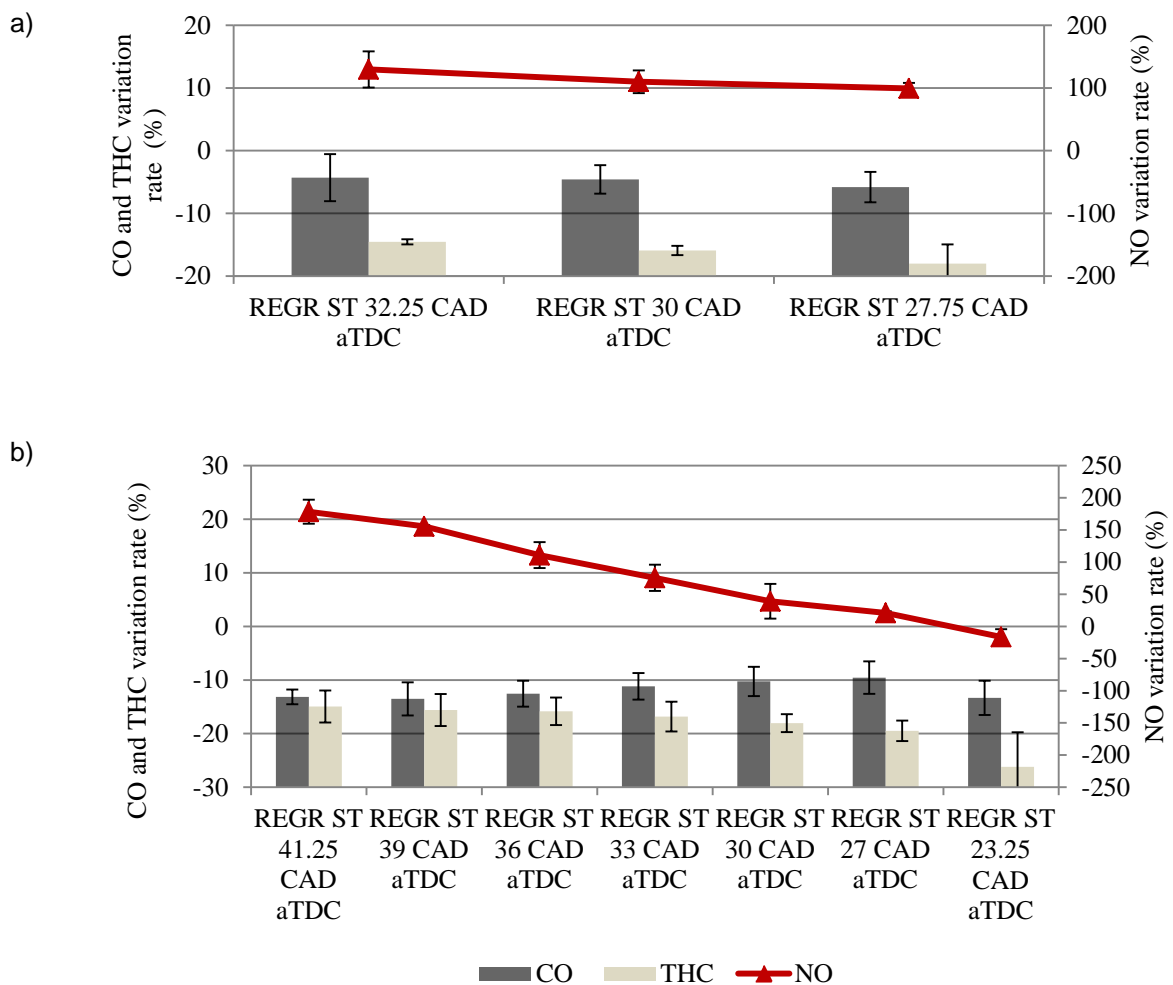


Figure 6. Effect of spark timing on gaseous emissions under REGR conditions at a) 303 CAD bTDC and b) 335 CAD bTDC.

.The decrease in engine CO emissions with EGR in respect to baseline combustion is associated to better fuel conversion efficiency due to the lower heat transfer losses and reduced liquid fuel [52]. When REGR is applied further benefits in CO emissions are obtained (see Figure 5) even though high concentration of CO is produced in the reformer and thus introduced to the engine cylinder. It is believed that the larger decrease in CO when REGR is combusted is due to the larger reductions in liquid fuel and the hydrogen presence which leads to the efficient oxidation of CO. No significant difference is observed for THC behavior between baseline and REGR combustion. However, REGR is advantageous compared to EGR as it reduced THC emissions the impact in increasing the THC emissions are significantly lower (Figure 5). It is suggested that the beneficial chemical effects of hydrogen, spark timing (in the case of 335 CAD bTDC injection timing) and larger liquid fuel replacement of REGR with respect to EGR are the responsible factors of the lower THC level of REGR with respect to EGR. The engine out emissions of NO for EGR and REGR are significantly lower compared to the baseline condition (Figure 5). It is reported that the dilution effect (the increase of the total in-cylinder mass reduces the concentration of both oxygen and nitrogen in the combustion chamber) and the lower local in-cylinder pressure and temperature in the combustion chamber hampers the gas phase reaction to produce NO<sub>x</sub> emissions. On the other hand, in the case of REGR, H<sub>2</sub> combustion leads to local higher temperature in the combustion chamber compared to EGR, thus increasing NO emissions. However, it can be seen that NO levels are markedly reduced, below the EGR emission, when the ST is retarded enough. As in the case of PM emissions, the effects on gaseous emissions of the different studied variables are showed in Table 6. Therefore, the application of REGR enables retarding the ST while maintaining the same IMEP reducing NO<sub>x</sub> emissions (see Figure 7) without any detrimental effect on engine efficiency. As in the case of PM emissions, the effects on gaseous emissions of the different studied variables are showed in Table 6.

The performance of the TWC is also analyzed in Figure 5. No difference in THC and NO emission reduction can be observed with EGR and REGR with respect to the TWC operation under baseline combustion operation. Nevertheless, the oxidation of CO is slightly worsened with REGR and especially with EGR combustion as a consequence of the lower availability of NO upstream of the three way catalyst to catalytically oxidize the HCs and CO within the catalyst.

#### **4. CONCLUSIONS**

The use of catalytically on-board fuel reforming in gasoline direct injection engines has been studied. Benefits in fuel economy, gaseous carbonaceous emissions and PM have been obtained. The reformate effects over gaseous emissions and PM have been in depth studied and the sources of the reformate benefits have been isolated.

The reduction in liquid fuel consumption as a result of the replacement of gasoline by the reformate products and the improvements in fuel efficiency as well as the chemical effects of hydrogen are the major reasons of the carbonaceous gaseous emissions and PM reductions with the use of on-board REGR. The utilization of part of the recirculated CO<sub>2</sub> to produce hydrogen in the reformer enables to reduce even further the CO<sub>2</sub> level emitted to the atmosphere. The reduction in the in-cylinder



temperature due to the higher mass of intake charge (dilution effect) and the possibility to maintain spark timing similar to the baseline condition while keeping combustion stability provide the significant NO<sub>x</sub> reduction with REGR combustion compared to baseline.

It can be concluded that REGR is a technique which is able to extend the benefit of using EGR in GDI engines. Further benefits are also obtained due to the synergies in combustion stability, reutilization of the in-cylinder produced CO<sub>2</sub>, gaseous emissions and PM which are a global major concern due to its pernicious effect on human health and the environment, from the combination of the higher mass of intake charge (EGR) and the presence of hydrogen in the reformat products. Those benefits should be further investigated varying fuel composition as well as in non-steady state engine operating condition and even on-board the real vehicle.

## **ACKNOWLEDGMENTS**

The authors would like to thank EPSRC (Ref No 1377213) and Johnson Matthey for funding the project and providing a scholarship to Maria Bogarra. Innovate UK (Technology Strategy Board) is acknowledged for supporting this work with the project “CO<sub>2</sub> Reduction through Emissions Optimization” (CREO: ref. 400176/149) in collaboration with Ford Motor Company, Johnson Matthey, Jaguar Land Rover and Cambustion. The Advantage West Midlands and the European Regional Development Fund as part of the Science City Research Alliance Energy Efficiency Project are also acknowledged for supporting the research work.

## **DEFINITIONS, ACRONYMS, ABBREVIATIONS**

aTWC	After Three-Way Catalyst
bTWC	Before Three-Way Catalyst
bTDC	Before Top Dead Centre
BSFC	Break Specific Fuel Consumption
CAD	Crank Angle Degree
CO	Carbon Monoxide
CO <sub>2</sub>	Carbon Dioxide
COV	Coefficient of Variance
CPC	Condensation Particle Counter
DR	Dilution Ratio
ECU	Electronic Computer Unit
EGR	Exhaust Gas Recirculation
FBP	Final Boiling Point
FTIR	Fourier Transform Infrared
GC-TCD	Gas Chromatograph - Thermal Conductivity Detector
GDI	Gasoline Direct Injection
HCS	Hydrocarbons
IBP	Initial Boiling Point
IMEP	Indicated Mean Effective Pressure

MON	Motor Octane Number
NEDC	New European Driving Cycle
NOx	Nitrogen Oxides
PAHs	Polyaromatic Hydrocarbons
PFI	Port Fuel Injection
PM	Particulate Matter
PSD	Particulate Size Distribution
REGR	Reformat Exhaust Gas Recirculation
RON	Research Octane Number
SMPS	Scanning Mobility Particulate Analyzer
ST	Spark Timing
THC	Total Hydrocarbons
TWC	Three-Way Catalyst
VOC	Volatile Organic Material

## REFERENCES

- [1] Zhao F, Lai, M.C., Harrington, D.L. Automotive spark-ignited direct-injection gasoline engines. *Progress in Energy and Combustion Science*. 1999;25:437-562.
- [2] Administration NHTS. Corporate Average Fuel Economy for MY 2012-MY 2016 Passenger Cars and Light Trucks. US Department of Transportation. 2009.
- [3] Zhao H. Overview of gasoline direct injection engines. *Advanced Direct Injection Combustion Engine Technologies and Development: Diesel engines*. 2010:1-19.
- [4] Queiroz C, Tomanik E. Gasoline Direct Injection Engines - A Bibliographical Review. SAE Technical Paper 973113. 1997.
- [5] Karavalakis G, Short D, Vu D, Villela M, Asa-Awuku A, Durbin TD. Evaluating the regulated emissions, air toxics, ultrafine particles, and black carbon from SI-PFI and SI-DI vehicles operating on different ethanol and iso-butanol blends. *Fuel*. 2014;128:410-21.
- [6] Quiros DC, Hu S, Hu S, Lee ES, Sardar S, Wang X, et al. Particle effective density and mass during steady-state operation of GDI, PFI, and diesel passenger cars. *Journal of Aerosol Science*. 2014.
- [7] Velji A, Yeom, K., Wagner, U., Spicher, U. et al. Investigations of the Formation and Oxidation of Soot Inside a Direct Injection Spark Ignition Engine Using Advanced Laser-Techniques. SAE Technical Paper. 2010;2010-01-0352.
- [8] Jarvis IW, Dreij K, Mattsson A, Jernstrom B, Stenius U. Interactions between polycyclic aromatic hydrocarbons in complex mixtures and implications for cancer risk assessment. *Toxicology*. 2014;321:27-39.
- [9] Pope CAaD, D.W. Health Effect of Fine Particulate Air Pollution: Lines that Connect. *Journal of the Air & Waste Management Association*. 2006;56:709-42.
- [10] Kim KH, Kabir E, Kabir S. A review on the human health impact of airborne particulate matter. *Environment international*. 2015;74:136-43.
- [11] Mimura T, Ichinose T, Yamagami S, Fujishima H, Kamei Y, Goto M, et al. Airborne particulate matter (PM<sub>2.5</sub>) and the prevalence of allergic conjunctivitis in Japan. *The Science of the total environment*. 2014;487:493-9.
- [12] Riedl M, Diaz-Sanchez D. Biology of diesel exhaust effects on respiratory function. *The Journal of allergy and clinical immunology*. 2005;115:221-8; quiz 9.
- [13] Russell G, Brunekreef B. A Focus on Particulate Matter and Health. *Environ Sci Technol*. 2009;43:4620-5.
- [14] Peng Z, Wang T, He Y, Yang X, Lu L. Analysis of environmental and economic benefits of integrated Exhaust Energy Recovery (EER) for vehicles. *Applied Energy*. 2013;105:238-43.

- [15] Zhang X, Chau KT. An automotive thermoelectric–photovoltaic hybrid energy system using maximum power point tracking. *Energy Conversion and Management*. 2011;52:641-7.
- [16] Agudelo AF, García-Contreras R, Agudelo JR, Armas O. Potential for exhaust gas energy recovery in a diesel passenger car under European driving cycle. *Applied Energy*. 2016;174:201-12.
- [17] Saidur R, Rezaei M, Muzammil WK, Hassan MH, Paria S, Hasanuzzaman M. Technologies to recover exhaust heat from internal combustion engines. *Renewable and Sustainable Energy Reviews*. 2012;16:5649-59.
- [18] Karvonen M, Kapoor R, Uusitalo A, Ojanen V. Technology competition in the internal combustion engine waste heat recovery: a patent landscape analysis. *Journal of Cleaner Production*. 2016;112:3735-43.
- [19] Heidrich P, Krisch T. Assessment of Waste Heat Recovery Options in Passenger Car Applications by Various Rankine Cycles. *Heat Transfer Engineering*. 2014;36:1321-31.
- [20] Sprouse C, Depcik C. Review of organic Rankine cycles for internal combustion engine exhaust waste heat recovery. *Applied Thermal Engineering*. 2013;51:711-22.
- [21] Livio D, Diehm C, Donazzi A, Beretta A, Deutschmann O. Catalytic partial oxidation of ethanol over Rh/Al<sub>2</sub>O<sub>3</sub>: Spatially resolved temperature and concentration profiles. *Applied Catalysis A: General*. 2013;467:530-41.
- [22] Hebben N, Diehm C, Deutschmann O. Catalytic partial oxidation of ethanol on alumina-supported rhodium catalysts: An experimental study. *Applied Catalysis A: General*. 2010;388:225-31.
- [23] Hartmann M, Maier L, Deutschmann O. Hydrogen production by catalytic partial oxidation of iso-octane at varying flow rate and fuel/oxygen ratio: From detailed kinetics to reactor behavior. *Applied Catalysis A: General*. 2011;391:144-52.
- [24] Fennell D, Herreros J, Tsolakis A, Cockle K, Pignon J, Millington P. Thermochemical recovery technology for improved modern engine fuel economy – part 1: analysis of a prototype exhaust gas fuel reformer. *RSC Adv*. 2015;5:35252-61.
- [25] Diehm C, Kaltschmitt T, Deutschmann O. Hydrogen production by partial oxidation of ethanol/gasoline blends over Rh/Al<sub>2</sub>O<sub>3</sub>. *Catalysis Today*. 2012;197:90-100.
- [26] Le Valant A, Garron A, Bion N, Duprez D, Epron F. Effect of higher alcohols on the performances of a 1%Rh/MgAl<sub>2</sub>O<sub>4</sub>/Al<sub>2</sub>O<sub>3</sub> catalyst for hydrogen production by crude bioethanol steam reforming. *International Journal of Hydrogen Energy*. 2011;36:311-8.
- [27] Tsolakis A, Megaritis A. Partially premixed charge compression ignition engine with on-board production by exhaust gas fuel reforming of diesel and biodiesel. *International Journal of Hydrogen Energy*. 2005;30:731-45.
- [28] Conte E, Boulouchos K. Experimental investigation into the effect of reformer gas addition on flame speed and flame front propagation in premixed, homogeneous charge gasoline engines. *Combustion and Flame*. 2006;146:329-47.
- [29] Allgeier T, Klenk, M., Landefeld, T., Conte, E. et al., . Advanced Emission and Fuel Economy Concept Using Combined Injection of Gasoline and Hydrogen in SI-Engines. *SAE Technical Paper* 2004;2004-01-1270.
- [30] Tully E. H, J., . Lean-Burn Characteristics of a Gasoline Engine Enriched with Hydrogen Plasmatron Fuel Reformer,. *SAE Technical Paper* 2003;2003-01-0630.
- [31] Gomes SR, Bion N, Blanchard G, Rousseau S, Bellière-Baca V, Harlé V, et al. Thermodynamic and experimental studies of catalytic reforming of exhaust gas recirculation in gasoline engines. *Applied Catalysis B: Environmental*. 2011;102:44-53.
- [32] Fennell D, Herreros, J., Tsolakis, A., and Xu, H. . GDI Engine Performance and Emissions with Reformed Exhaust Gas Recirculation (REGR). *SAE Technical Paper*. 2013;2013-01-0537.
- [33] Alkidas AC. Combustion advancements in gasoline engines. *Energy Conversion and Management*. 2007;48:2751-61.
- [34] Li T, Wu D, Xu M. Thermodynamic analysis of EGR effects on the first and second law efficiencies of a boosted spark-ignited direct-injection gasoline engine. *Energy Conversion and Management*. 2013;70:130-8.

- [35] Wei H, Zhu T, Shu G, Tan L, Wang Y. Gasoline engine exhaust gas recirculation – A review. *Applied Energy*. 2012;99:534-44.
- [36] Zhang Z, Zhang H, Wang T, Jia M. Effects of tumble combined with EGR (exhaust gas recirculation) on the combustion and emissions in a spark ignition engine at part loads. *Energy*. 2014;65:18-24.
- [37] Abd-Alla GH. Using exhaust gas recirculation in internal combustion engines: a review. *Energy Conversion and Management*. 2002;43:1027-42.
- [38] Fennell D, Herreros J, Tsolakis A. Improving gasoline direct injection (GDI) engine efficiency and emissions with hydrogen from exhaust gas fuel reforming. *International Journal of Hydrogen Energy*. 2014;39:5153-62.
- [39] Ji C, Dai X, Ju B, Wang S, Zhang B, Liang C, et al. Improving the performance of a spark-ignited gasoline engine with the addition of syngas produced by onboard ethanol steaming reforming. *International Journal of Hydrogen Energy*. 2012;37:7860-8.
- [40] Karjalainen P, Pirjola L, Heikkilä J, Lähde T, Tzamkiozis T, Ntziachristos L, et al. Exhaust particles of modern gasoline vehicles: A laboratory and an on-road study. *Atmospheric Environment*. 2014;97:262-70.
- [41] Barone TL, Storey JME, Youngquist AD, Szybist JP. An analysis of direct-injection spark-ignition (DISI) soot morphology. *Atmospheric Environment*. 2012;49:268-74.
- [42] Stevens EaS, R.,. "Piston Wetting in an Optical DISI Engine: Fuel Films, Pool Fires, and Soot Generation," SAE Technical Paper 2001;2001-01-1203.
- [43] Jiao Q, Reitz RD. The Effect of Operating Parameters on Soot Emissions in GDI Engines. *SAE International Journal of Engines*. 2015;2015-01-1071.
- [44] Gill SS, Turner D, Tsolakis A, York AP. Controlling soot formation with filtered EGR for diesel and biodiesel fuelled engines. *Environmental science & technology*. 2012;46:4215-22.
- [45] Gill SS, Herreros JM, Tsolakis A, Turner DM, Miller E, York APE. Filtered EGR – a step towards an improved NOX/soot trade-off for DPF regeneration. *RSC Advances*. 2012;2:10400.
- [46] Szybist JP, Youngquist AD, Barone TL, Storey JM, Moore WR, Foster M, et al. Ethanol Blends and Engine Operating Strategy Effects on Light-Duty Spark-Ignition Engine Particle Emissions. *Energy & Fuels*. 2011;25:4977-85.
- [47] Chen L, Braisher, M., Crossley, A., Stone, R. et al., . The Influence of Ethanol Blends on Particulate Matter Emissions from Gasoline Direct Injection Engines. SAE Technical Paper 2010:2010-01-0793.
- [48] Qin J, Li X, Pei Y. Effects of Combustion Parameters and Lubricating Oil on Particulate Matter Emissions from a Turbo-Charged GDI Engine Fueled with Methanol/Gasoline Blends. SAE Technical Paper. 2014;2014-01-2841.
- [49] An Y-z, Teng S-p, Pei Y-q, Qin J, Li X, Zhao H. An experimental study of polycyclic aromatic hydrocarbons and soot emissions from a GDI engine fueled with commercial gasoline. *Fuel*. 2016;164:160-71.
- [50] Farron C, Matthias, N., Foster, D., Andrie, M. , Krieger. R., Najt, P. et al. Particulate Characteristics for Varying Engine Operation in a Gasoline Spark Ignited, Direct Injection Engine. SAE Technical Paper. 2011;2011-01-1220.
- [51] Heywood J. *Internal Combustion Engine Fundamentals*: McGraw-Hill Education; 1988.
- [52] Alger T, Chauvet, T., and Dimitrova, Z., . Synergies between High EGR Operation and GDI Systems, . SAE Int J Engines. 2009;1:101-14.