

Wind tunnel testing on a train model subjected to crosswinds with different windbreak walls

Hashmi, Anam; Hemida, Hassan; Soper, David

DOI:

[10.1016/j.jweia.2019.104013](https://doi.org/10.1016/j.jweia.2019.104013)

License:

Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

Document Version

Peer reviewed version

Citation for published version (Harvard):

Hashmi, A, Hemida, H & Soper, D 2019, 'Wind tunnel testing on a train model subjected to crosswinds with different windbreak walls', *Journal of Wind Engineering and Industrial Aerodynamics*, vol. 195, 104013, pp. 1-19. <https://doi.org/10.1016/j.jweia.2019.104013>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

Hashmi, A, Hemida, H & Soper, D 2019, 'Wind tunnel testing on a train model subjected to crosswinds with different windbreak walls', *Journal of Wind Engineering and Industrial Aerodynamics*, vol. 195, 104013, pp. 1-19. <https://doi.org/10.1016/j.jweia.2019.104013>

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

1 Wind tunnel testing on a train model subjected to crosswinds with different windbreak walls

2 Syeda Anam Hashmi*, Hassan Hemida, David Soper

3 School of Civil Engineering, University of Birmingham, UK, B15 2TT

4 *Corresponding author's e-mail: sah232@bham.ac.uk

5 Abstract

6 Crosswind stability of high-speed trains has been a prominent research topic for several decades,
7 primarily motivated by the frequent rail-related accidents under strong crosswinds. In this study, the
8 influence of different windbreak walls on train aerodynamic properties whilst subjected to crosswinds
9 was assessed. The experimental campaign measured surface pressures on a stationary 1:25 model-scale
10 of Class 390 Pendolino train under varying wind incidence angles with different windbreak walls inside
11 a wind tunnel. For the first time, the work considers transition regions in windbreak walls, where
12 transition regions refer to random geometrical changes in the distance between the train and the
13 windbreak wall. Differences in pressure distribution on the train surface with and without different
14 windbreak walls are evident. Forces on the train are calculated using the mean pressure coefficients.
15 Overall, at a yaw angle of 90° , the tallest windbreak wall usually provided lowest mean pressure
16 distribution on the surface of the model train due to the shielding effects; while the windbreak wall with
17 a transition region of 90° usually produced the highest mean pressure distribution, comparatively. At a
18 yaw angle of 30° , the results from windbreak walls with transition regions were relatively uniform
19 indicating a smooth pressure distribution.

20 Keywords:

21 Train aerodynamics; Crosswinds; Model-scale tests; Pressure coefficients; Side and lift force
22 coefficients; rolling moment coefficients; Windbreak walls, Wind tunnel tests

23 1. Introduction

24 The high-speed rail industry is a growing sector in terms of train speeds and the number of railway lines
25 in the United Kingdom (RSSB, 2016; Department for Transport, 2017), and other countries including
26 China, Japan, United States and many European countries (Fujii et al., 1999; Deeg et al., 2008). With
27 clear indication that rail passenger numbers are likely to double in the upcoming years (RSSB, 2016),
28 it is crucial to develop high-speed and highly efficient trains, as well as the infrastructure to be able to
29 run such services. In addition to this, the current aim of optimising commercial rail vehicles involves
30 designing high-speed trains to be light-weight and longer (Diedrichs et al., 2003). This can be
31 problematic as the stability of these commercial rail vehicles to crosswind forces has been a well-known
32 problem for more than three decades now (Copley, 1987; Baker et al., 2004; Dorigatti et al., 2015). This
33 is because the effects of external aerodynamics on high-speed trains are usually pronounced under
34 strong crosswinds. As Copley (1987) pointed out, the weight of the train is the only factor which
35 counteracts the aerodynamic overturning forces. Therefore, an obvious deterioration in the running
36 performance of a train can be anticipated under high aerodynamic loads, caused mainly by high wind
37 speeds. It is known that under crosswinds the resultant wind speed, calculated from the wind and train
38 speeds, and yaw angle are the important factors on vehicle dynamics. Consequently, Hemida and
39 Krajnovic (2010) suggested that high-speed trains are potentially at a risk of derailing or overturning
40 due to the impact of strong crosswinds, which hit the train surfaces. This was also supported by Browand
41 et al. (2009) who suggested that design factors on the new generation of trains may lead to a huge impact
42 on train stability. Although the occurrence of rail-related accidents is rare, passenger safety cannot be
43 compromised on. Therefore, it is important to first understand the flow fields which develop around
44 trains under crosswinds and thereafter, several measures need to be realised to improve the safety and
45 the stability of high-speed trains.

48 For a number of years, considerable attention has been paid to the issue of crosswinds affecting high-
49 speed trains by several researchers (Cooper, 1979; Schulte-Werning and Matschke, 1997; Fujii et al.,
50 1999; Cheli et al., 2010; Hemida and Baker, 2010; Baker et al., 2011). These researchers have
51 investigated the different factors which trigger vehicle instability in strong crosswinds. Tomasini et al.
52 (2015) put forward the view that two approaches can be adopted to overcome the risks caused by
53 crosswinds. One method is to restrict the speed of the vehicles to strict regulations while the other deals
54 with installing wind barriers. Often referred to as wind fences or windbreak walls, these are usually
55 built along the railway line, besides the track, where strong crosswinds are expected (Schulte-Werning
56 et al., 2002; Bocciolone et al., 2008; Zhang et al., 2013; He et al. 2014) in order to reduce the effect of
57 crosswinds on the stability of trains while ensuring passenger comfort. Overall, such windbreaks can
58 be customised according to the wind speed, wind pressure and the surrounding topological conditions.

59 Generally, wind barriers have been examined through the use of four techniques; full-scale field tests
60 (Richardson and Richards, 1995); wind tunnel tests (Chu et al., 2013; Tomasini et al., 2015); numerical
61 modelling (Mohebbi and Rezvani, 2017) and analytical methods (Avila-Sanchez et al., 2016). Schulte-
62 Werning et al. (2002) draws on research conducted within the TRANSAERO project that involved
63 carrying out experimental studies to report an initial analysis of the influence of windbreaks. The study
64 considered the influence of strong crosswinds with different types of wind barriers for both static and
65 moving models and further attempted to address the reduction of the aerodynamic forces on rail vehicles
66 through wind barriers. Similar experimental analyses have been performed in the Politecnico di Milano
67 wind tunnel to evaluate the characteristics of solid and porous types of wind barriers (Bocciolone et al.,
68 2008). To be more precise, Zhang et al. (2013) states that a wind barrier reduces the magnitude of the
69 aerodynamic rolling moment coefficient acting on the train under crosswind conditions. On the basis of
70 the current evidence, Tomasini et al. (2015) stated that creating long barriers in length and achieving
71 high Reynolds number is quite problematic in wind tunnel testing. Thus, Tomaisini et al. performed a
72 series of tests in a wind tunnel to analyse the characteristics of different windbreaks and the
73 corresponding effects on train wind loads. The tests were performed at high Reynolds number to avoid
74 scaling effects and employed long wind barriers to reduce boundary layer effects, which are pronounced
75 with short length barriers (Tomasini et al., 2015). Analysis of the results revealed that the existence of
76 a wind barrier significantly decreases the dependency of all aerodynamic coefficients to the Reynolds
77 number. Specifically, the sensitivity of the side force and rolling moment coefficients was observed to
78 disappear while the lift force coefficient reduced considerably. While the study can be considered as a
79 notable one, it concludes that the distance between the wind barrier and the track is an important
80 parameter. However, an important problem which has not been addressed yet is the random geometrical
81 change in the structure of windbreak walls. The abovementioned technique of installing windbreak
82 walls is deemed effective if the wind barrier is built entirely parallel to the track. Whereas, in reality it
83 is not possible to develop an entirely uniform and continuous windbreak structure due to possible
84 complexities in the surrounding terrain such as cuttings, which cannot be avoided. The windbreak wall
85 would therefore consist of a discontinuous structure with a series of transition regions. Transition
86 regions refer to the random changes in the shape of the windbreak wall which as mentioned earlier
87 occur due to the different terrains and topographies which exist around the railway track. Therefore, the
88 random change in the distance between the windbreak wall and the railway track, known as the
89 transition region, can result in the formation of vortices around the train body, which may hit the train
90 surfaces potentially leading to stability issues for the train. Moreover, despite the several benefits of
91 wind protections, a few researches have stated the drawbacks associated with the use of wind barriers.
92 As mentioned by Zhao et al. (2015), wind barriers can create a large number of vortices when interacting
93 with train aerodynamic flows and crosswind creating potential issues for the stability of the train. Wind
94 barriers can ‘agitate’ the wind flow thus causing increased turbulence effects, which lead to
95 complexities in the flow fields around the trains (Zhang et al., 2013; Guo et al., 2015; Zhao et al., 2015).
96 Due to these complexities, there has been a relatively little research carried out on the effect of wind
97 protections on the aerodynamic behaviour of trains. Also, despite being in considerable attention, few
98 publications discuss in precise detail the effects of wind barriers in particular. Most studies, such as
99 Avila-Sanchez et al. (2016), considered only the effects of windbreaks on a bridge system while some
100 other CFD related studies lacked proper experimental validation (Bi et al., 2011; Li et al., 2012; Guo et
101 al., 2015).

102 It is therefore important to explore both, experimentally and numerically the aerodynamic performance
103 of trains subjected to crosswinds with different types of windbreak walls in order to propose the best
104 possible design of a windbreak wall. This paper presents and analyses the results of a series of
105 experiments performed at the University of Birmingham's Wind Tunnel facility. The main aim of this
106 research is to provide an understanding of the aerodynamic flow on a passenger train subjected to
107 crosswinds, both with and without windbreak walls, and investigate how transition regions in windbreak
108 walls affect the magnitude of the surface pressure experienced by the train. This paper deals with only
109 one transition zone in a track. Thus, the distance between multiple transition regions is irrelevant to this
110 paper.

111 Several researchers in the past have attempted to simulate aerodynamic characteristics of moving trains
112 using either experimental or numerical simulations (Krajnovic et al., 2012; Dorigatti et al., 2015;
113 Premoli et al., 2016; Niu et al., 2018; Liu et al., 2018; Deng et al., 2019; Yang et al., 2019). However,
114 most CFD studies present in the literature on the use of windbreak wall lack accurate validation data
115 from wind tunnel tests or similar. The novelty of this paper lies in providing a first step towards
116 understanding an aerodynamic issue that is not well understood. It is acknowledged that the train model
117 in the experiments is stationary, but the achieved data is still valuable for a complicated engineering
118 problem that is yet to be understood. Moreover, there are several publications available in the literature
119 such as the works of Zhang et al. (2013; 2017), which have studied the aerodynamic properties of wind
120 barriers on a train bridge model to calculate dynamic response. These studies, which are considered
121 notable, were also performed on stationary models to obtain the three-component coefficients for the
122 vehicle. Furthermore, Avila-Sanchez et al. (2014; 2016) also present an interesting research where the
123 shelter effectiveness of a set of windbreaks placed over a railway twin-track embankment is
124 experimentally analysed. A set of wind tunnel tests were undertaken and results corresponding to
125 pressure tap measurements over a section of a typical high-speed train were presented. All of these
126 studies along with the studies of Cheli et al. (2010), Tomasini et al. (2015) and He et al. (2014) did not
127 take into account the relative movement of the train unit compared to the walls, but the results presented
128 were considered remarkable and ones which would benefit the readers. In terms of Dorigatti et al. (2015)
129 research, the authors have confirmed that differences between the static and moving model experiments
130 were observed only on the nose region of the train. Over the rest of the train body, it was proved that
131 any difference in the pressure distribution between the static and moving experiments were within the
132 experimental uncertainty. The study further stated that in terms of the overall mean aerodynamic side
133 and lift forces and rolling moment coefficients, the static experiments are sufficient.

134 Similarly, the current study is an initial step towards understanding the impact of windbreak walls with
135 different designs on a typical passenger train. Based on the data presented in this study, a number of
136 other motivational studies can be carried out, which can consider the relative movement of the train. To
137 accomplish the aim of this study, a stationary 1:25 scale model of a Class 390 Pendolino train with an
138 appropriate Single Track with Ballast and Rail (STBR) was setup in the wind tunnel to perform
139 experiments at crosswind angles of 30° and 90°. These experiments measured the surface pressure on
140 the model train with and without different windbreak walls of different heights and with different
141 transition regions in order to investigate the effect of these parameters on the aerodynamic flow around
142 a stationary train.


143 Section 2 explains the experimental setup and the methodology that was adopted in this investigative
144 research on understanding the difference in the aerodynamic performance of a model-scale passenger
145 train under crosswinds with and without different types of windbreak walls. Section 3 provides a
146 detailed discussion of the results of the mean non-dimensional surface pressure distribution and the
147 aerodynamic load coefficients on the train for the different test cases. Section 4 discusses the main
148 outcomes of the research, while providing recommendations for further developments to this study.

149 **2. Experimental methodology**

150 *2.1. The UoB wind tunnel facility*

151 The University of Birmingham's (UoB) wind tunnel is an open-circuit wind tunnel facility which was
152 constructed in 2012 with the purpose of simulating velocity and turbulence profiles. The wind tunnel
153 consists of a 10 m long working test section and has a 2 m by 2 m square cross-section.

154 The facility is powered by a total of 49 axial fans which are arranged in 7 rows of 7 units each. Each
155 fan is expected to provide a maximum wind speed of about 10 m/s. Figure 1 shows the front and rear
156 view of the current wind tunnel. To provide a uniform wind speed with minimal turbulence, wind from
157 the fans flows through a honeycomb screen, which acts as a flow straightener, before entering the wind
158 tunnel test section.

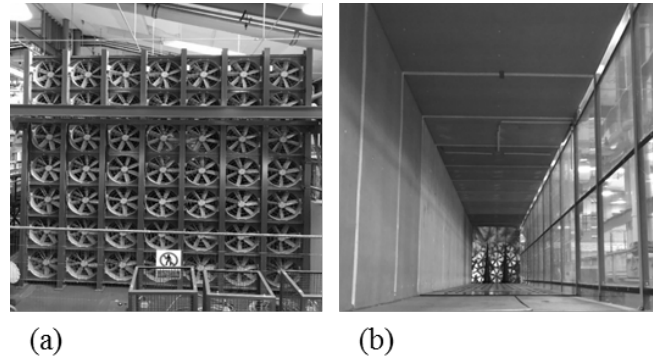

159 (a) (b)
160 Figure 1: (a) Rear view and (b) Front view of the UoB wind tunnel.

161 *2.1.1. Instrumentation*


162 The wind tunnel facility makes use of 2 kHz Series 100 Cobra probes (TFI, 2011), which can measure
163 3D velocities of the flow and the static pressure. These multi-hole (4-hole) cobra probes are mounted
164 to clamp stands, positioned at the designated measuring points, and are capable of providing the three
165 components of time-varying (fluctuating) and time-averaged (mean) velocity in real-time. A 500 Hz
166 multi-channel, Digital Pressure Measurement System (DPMS) is available for measuring ground-plane
167 pressures and pressure fields on model scale buildings and vehicles.

168 The 64-channel DPMS was used to measure the pressure on the surface of the model train as the system
169 is capable of measuring both, time-varying and time-averaged pressures thus making it suitable for the
170 measurement of rapidly fluctuating pressure distributions as well.


171 *2.1.2. Crosswind characterisation of the wind tunnel*

172 Characterising flows inside a wind tunnel is very important as it helps gain a better understanding of
173 the crosswind simulations by providing an in-depth flow history in terms of the mean wind speeds and
174 turbulence intensities of the flow. Therefore, this study first investigated the flow in the wind tunnel by
175 taking measurements at horizontal and vertical points. Horizontal Wind Profiles (HWP) were measured
176 at different heights from the ground and comprised of a total of 150 spanwise measuring positions.
177 Vertical Wind Profiles (VWP) were measured from the floor of the wind tunnel to a height of 1.5 m
178 and comprised of a total of 100 measuring positions. These measurements were made at a distance of 6
179 m from the fans, which was the position of experimental setup. As expected, it was observed that there
180 are more differences in the mean velocities at lower heights as compared to higher heights. This is due
181 to boundary layer effects and the turbulence intensity being higher near the ground. Thus, the most
182 feasible section for carrying out the experimental tests was chosen, which is at a height of 350 mm from
183 the floor of the wind tunnel. Figure 2a shows the VWP of the streamwise mean wind velocity and the
184 streamwise turbulence intensity in correspondence to the height of the model train while Figure 2b
185 shows the HWP of the mean streamwise velocity at a height of 350 mm from the floor of the wind
186 tunnel. The wind profile measurements conform to the CEN (2018) standards.

187

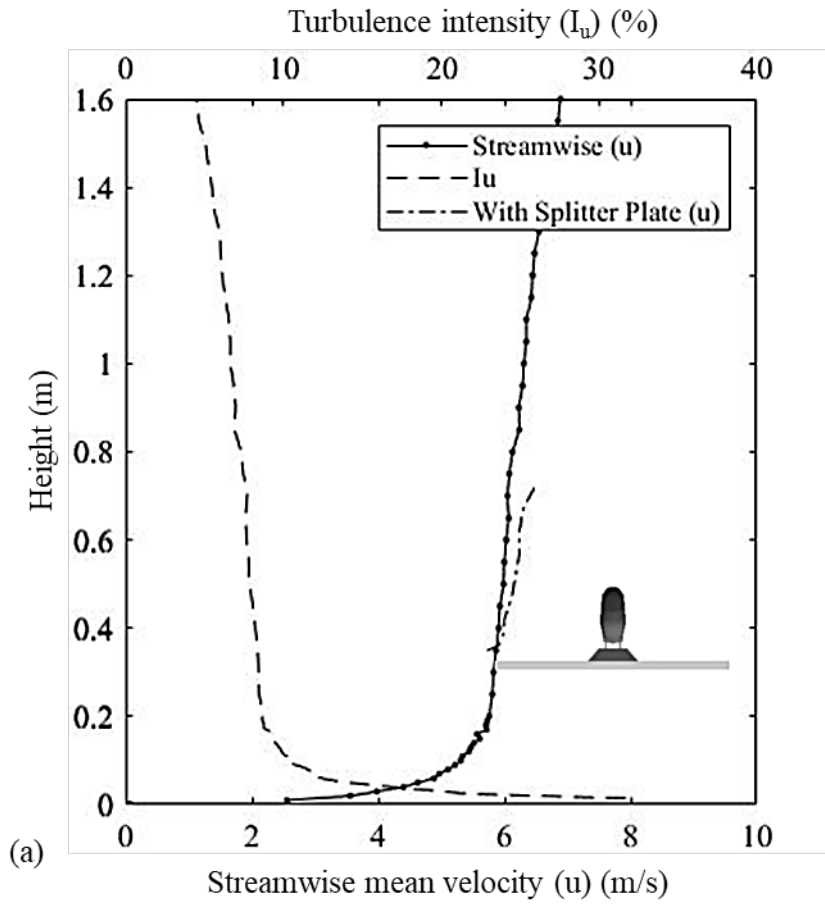

188

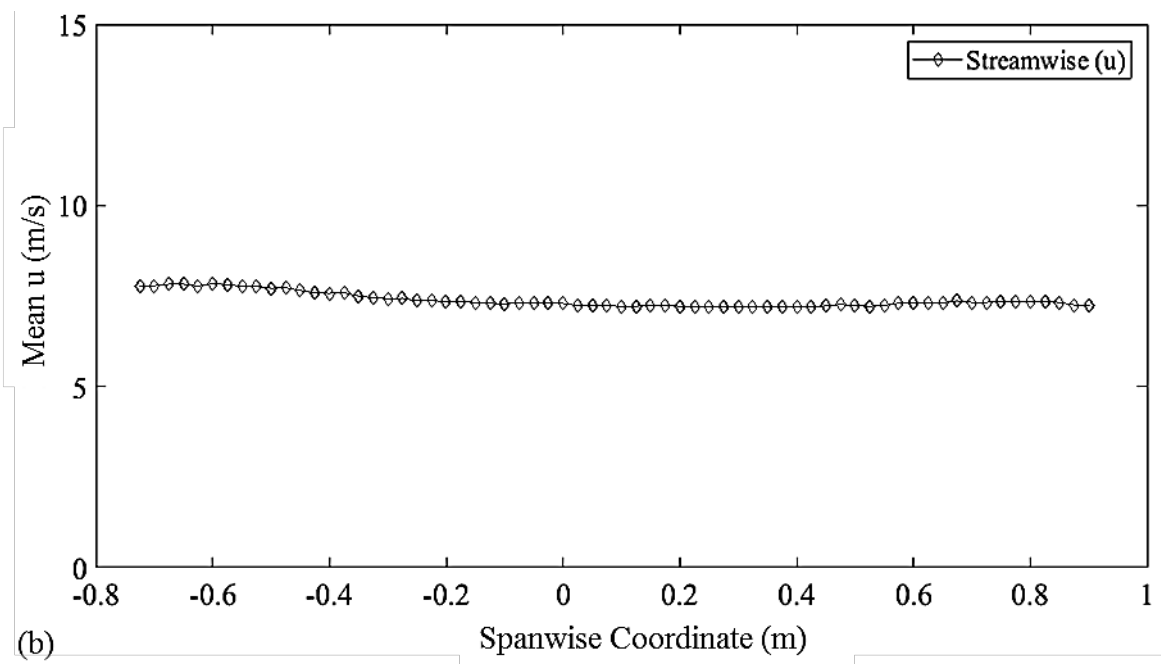

189

190

191

192

Figure 2: (a) Vertical mean Wind Profile: Velocity and streamwise turbulence intensity profiles of the wind tunnel measured with and without the placement of splitter plate (b) Horizontal mean Wind Profile: Streamwise velocity at a height of 350 mm from the wind tunnel floor.

193

194

195

196

As evident, there is a boundary layer growth near the floor of the wind tunnel with an increase in the streamwise mean wind velocity with height. Thus, it is deemed appropriate to perform experiments at a splitter plate at height of 300 mm from the floor of the wind tunnel. The measurement of the vertical velocity profile over the splitter plate allows for determining the impact of the presence of a wooden

splitter plate, its upwind edge and the blockage under the plate. However, upon measurement of both profiles, it was clearly visible that the presence of a splitter plate does not modify the wind speed profile, especially in the section where the train model was placed.

An irregular trend is observed in the upper area of the wind tunnel. This signifies that the roof of the wind tunnel effectively acts as another boundary layer and thus might be possibly introducing larger irregularities and a resulting higher level of turbulence in the corresponding flow, circulating through the top part. However, this is not a cause of concern as the model used in this study is located below the section where irregularities begin. Furthermore, Table 1 provides the spanwise averages of the mean velocities (streamwise [u], vertical [v] and lateral [w]) and the associated turbulence intensities at a height of 350 mm from the floor of the wind tunnel, essentially where the train model was placed.

Mean wind velocity (m/s)			Turbulence intensity (%)			
u	v	w	I _u	I _v	I _w	I _{uvw}
7.2	0.4	-0.5	6.2	5.2	4.9	5.5


Table 1: Spanwise averages of mean wind velocity and turbulence intensities along the horizontal at a height of 350 mm from the floor of the wind tunnel.

2.2. Scale model

A 1:25 model of the Class 390 Pendolino train is adopted as the test vehicle in this study, as there is additional validation data available from the work conducted by Dorigatti et al. (2015). Dorigatti examined the simplest case possible by adopting a conventional flat ground scenario with no ballast shoulder or windbreaks. This was considered as a fundamental reference for further investigations concerned with more realistic and critical scenarios such as a STBR (Single Track and Ballast Rail). Thus, a STBR was chosen as a ground scenario in this study. This was also based on the study by Baker et al. (2009) which stated that in the process of standardising wind tunnel tests, a reference scenario known as STBR has been proposed as the only ground scenario which should be considered (CEN, 2013). However, it is worth mentioning that even though a STBR is a reference scenario, in the presence of barriers, the DTBR (Double Track Ballast and Rail) might modify the distance between the train and any downwind barriers. This scenario can be tested in a further study.

Furthermore, wind tunnel experiments on a stationary model are carried out as these are the types of experiments which are currently prescribed in the railway standards (EC, 2008; RSSB, 2009; CEN, 2016) and have also been performed in a variety of investigations (Baker and Brockie, 1991; Cheli et al., 2010; Dorigatti et al., 2015; Avila-Sanchez et al., 2016). In terms of the choice of the wind incidence angle, a wind incidence angle of 30° is chosen because this value is considered at the top of the realistic range for high-speed trains (Cheli et al., 2011) while 90° represents the highest transversal wind case (Cheli et al., 2010), is recommended in CEN (2018) standards, and as Baker (2014) states higher yaw angles (above 60 degrees) are relevant for stationary trains. These wind incidence angles of 30° and 90° were used for the first set of experiments. For the second set of experiments, four specific experimental cases were chosen and were investigated under a varying wind incidence angle from 20° to 90° with an increment of 10°. This was done to comprehend the sensitivity of the results to varying wind incidence angles and for understanding the worst wind incidence angle to the track and the train for the Class 390 train model, specifically at a particular case.

Figure 3a shows an image of the scale model which was used in this study and Figure 3b shows the full-scale Class 390 train. The scale model used in this study is a full reproduction of the leading car and partial trailing car of the full-scale train. This research entailed measurements only on the leading car of the train for investigation, primarily because of the limitations of the wind tunnel size and also several researchers (Barcala and Meseguer, 2007; Bocciolone et al., 2008; Cheli et al., 2010; Dorigatti et al., 2015) in the past have focused their studies on the leading coach of the train only based on the assumption that significant aerodynamic forces are present around this region. The partial trailing car which was a half-car is only included in this study to provide a realistic flow around the train, based on the CEN (2018) standards.

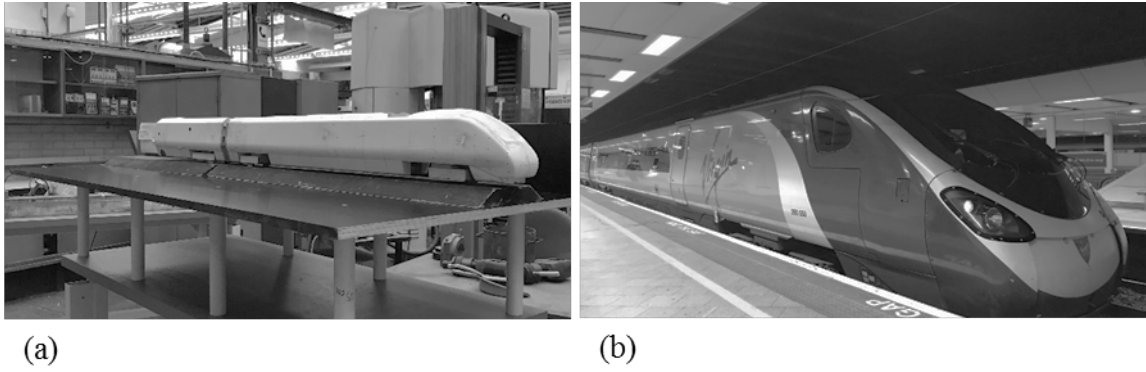


243
244 Figure 3: Image of the (a) 1:25 scale model of Class 390 Pendolino train used in this study (b) full-
245 scale of the Class 390 Pendolino train.

246 *2.2.1. Pressure taps*

247 Pressure taps are created by drilling a small hole in the model surface. Each pressure tap is fashioned
248 by the insertion of cylindrical stainless-steel tubes with an inner diameter of 1.5 mm and an outer
249 diameter of 2 mm. Each tube is 12 mm long and is connected to the holes on the internal walls of the
250 model by gluing them in place using an epoxy structural adhesive.

251 PVC tubings were used to connect the pressure taps to channels of the DPMS. A total number of 162
252 pressure taps are used in the experiments. All of these pressure taps are fitted on the model's leading
253 car and are arranged in a series of 14 loops (A-N), as shown in Figure 4. Table 2 provides the distance
254 of each loop (X) from the nose of the train, normalised to the total length of the first car (L), which was
255 1000 mm. In order to ensure consistency of the data received from different experimental runs, one
256 pressure tap was considered as the reference pressure tap. This tap was constantly monitored in each
257 experiment by keeping it connected to one of the channels of the DPMS. Since the DPMS consists of
258 only 64 channels, each experiment was carried out three times.

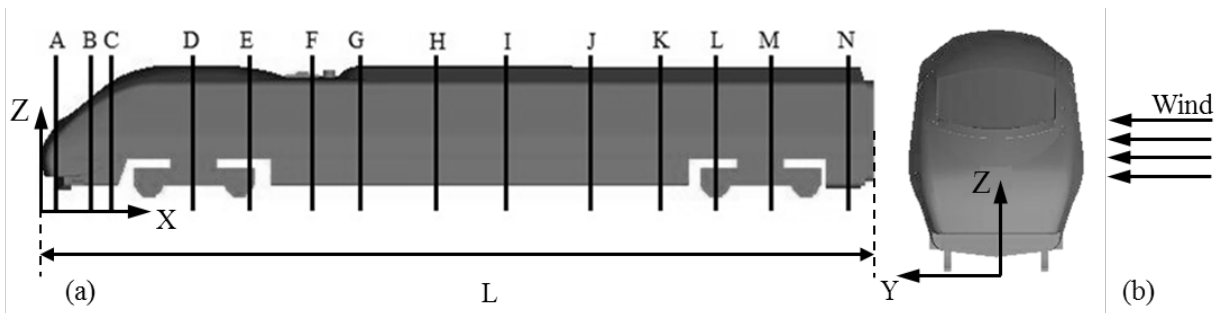


259
260 Figure 4: (a) Position of the loops consisting of pressure taps along the vehicle and (b) Coordinate
261 system with reference to onset wind.

Loop	A	B	C	D	E	F	G
X/L	0.018	0.055	0.085	0.185	0.250	0.325	0.390
Loop	H	I	J	K	L	M	N
X/L	0.480	0.560	0.665	0.750	0.810	0.890	0.970

262 Table 2: Longitudinal position of each loop (X) with respect to the overall length of the model (L).

263 *2.3. Experimental setup*

264 The train model was placed on top of the STBR, which was mounted centrally on a splitter plate. Figure
265 5 shows the overall dimensions of the train, STBR and the splitter plate. The overall length of the model
266 train is 1500 mm while the width is 110 mm and the height is 156 mm. The splitter plate is a wooden
267 plate with a 20 mm thickness, positioned at a 300 mm height from the floor of the wind tunnel. The
268 distance between any windbreak wall and the track center was maintained as 240 mm.

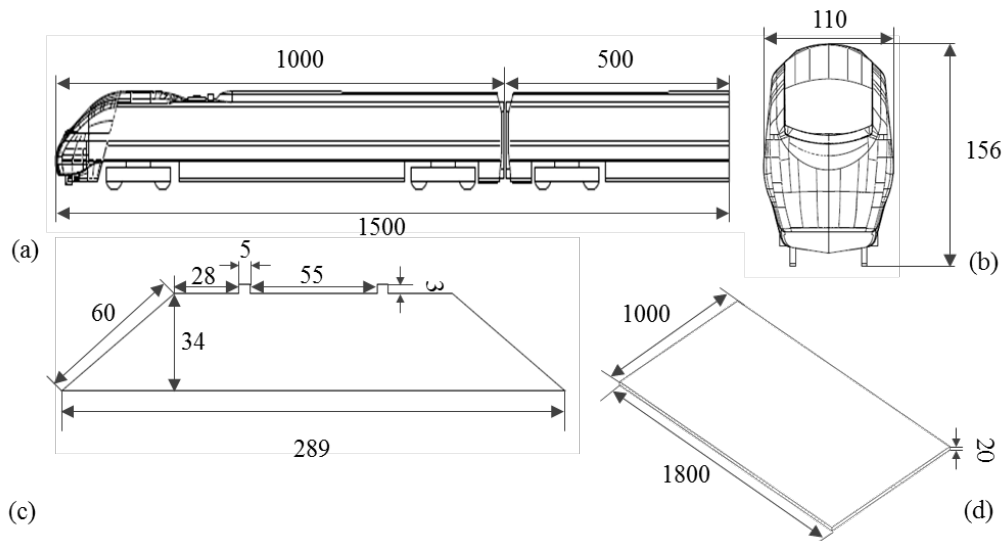


269
 270 Figure 5: Overall dimensions in mm of (a and b) the Class 390 Pendolino scale model (c) the STBR
 271 used in this study and (d) the splitter plate.

272 2.3.1. Test cases

273 A number of experiments were carried out for different cases at two different wind incidence angles:
 274 30° and 90°. These cases are illustrated in Figure 6 and are listed below:

- 275 (a) Track without any windbreak wall
- 276 (b) Track with windbreak wall 1 (Height of 160 mm)
- 277 (c) Track with windbreak wall 2 (Height of 190 mm. Same as the train height)
- 278 (d) Track with windbreak wall 3 (Height of 260 mm)
- 279 (e) Track with windbreak wall 4 (Height of 210 mm with a 45° transition angle)
- 280 (f) Track with windbreak wall 5 (Height of 210 mm with a 90° transition angle)

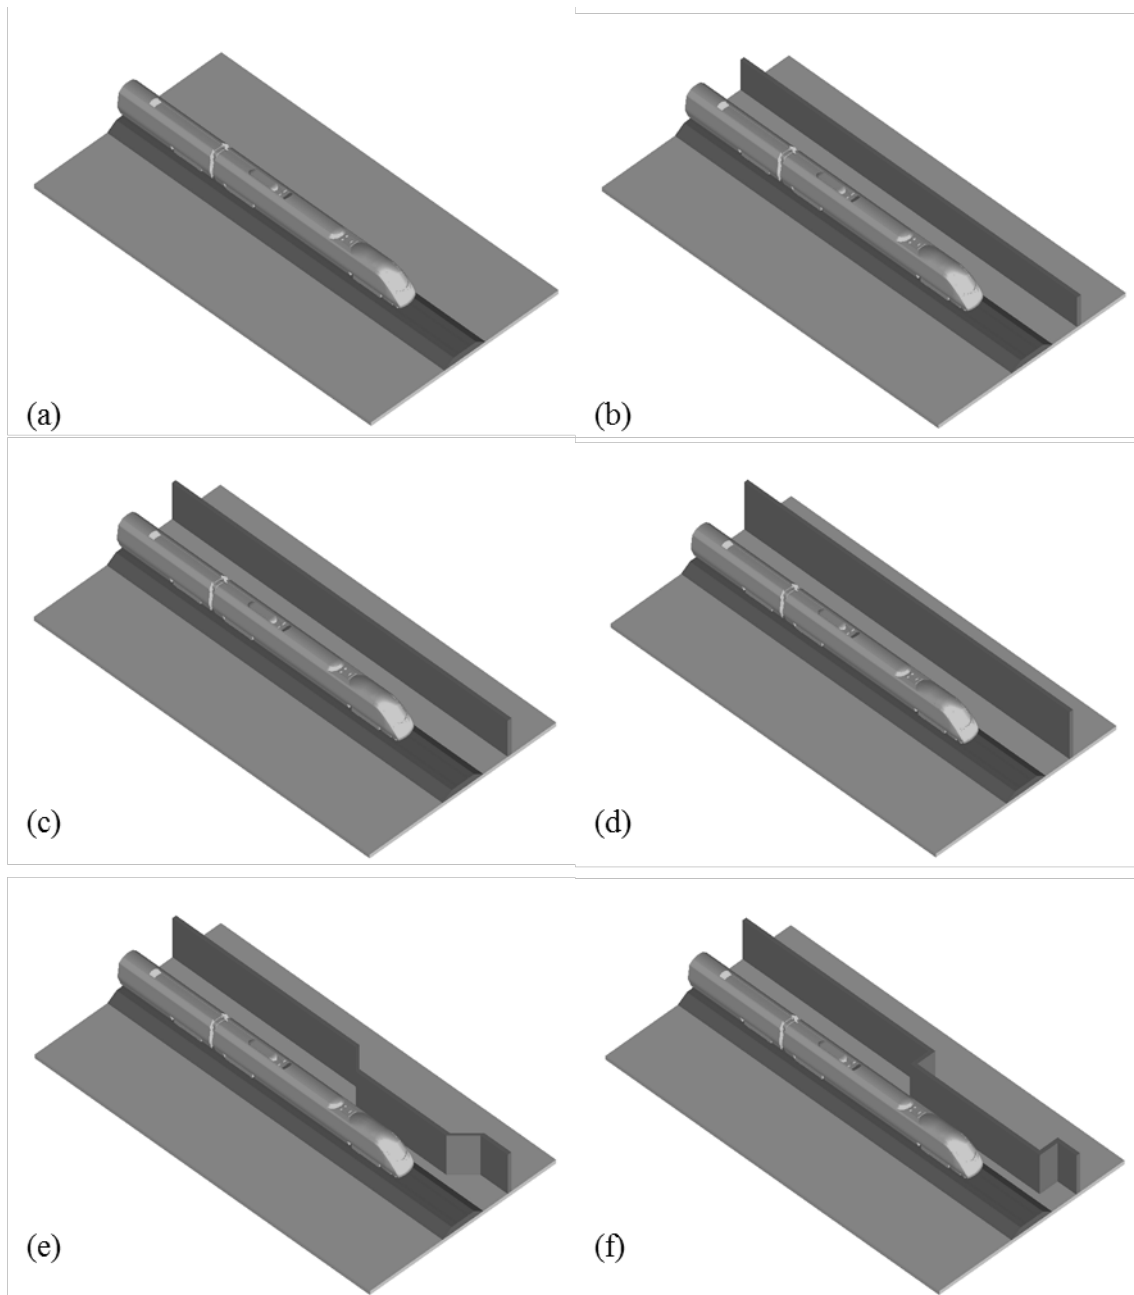

281

282 Figure 6: An illustration of the juxtapositions of different cases, which were examined in this study.

283 Following on, another set of experiments were carried out with the purpose of investigating the effect
 284 of changing the wind incidence angle on the cases examined. To elaborate, in these experiments,
 285 windbreak walls 4 and 5 (i.e. the walls with transition regions) were mainly examined and explored in
 286 depth in addition to two more cases. The terms WWS and LWS denote Windward Side and Leeward
 287 Side, respectively.

288 It must also be noted that each case was performed at varying wind incident angles, ranging from 20°
 289 to 90°, with an increment of 10°. These cases are listed below:

- 290 (g) Track without any windbreak wall
- 291 (h) Track with windbreak wall 4 (Height of 210 mm with a 45° transition angle) in the WWS
- 292 (i) Track with windbreak wall 5 (Height of 210 mm with a 90° transition angle) in the WWS
- 293 (j) Track with windbreak wall 2 (Height of 190 mm) in the LWS only

294

295 A further test was performed at two different wind incidence angles, 30° and 90° for:


296 (k) Track with windbreak wall 4 (Height of 210 mm with a 45° transition angle) in the WWS and
297 windbreak wall 2 (Height of 190 mm) in the LWS

298 The main reason for choosing three different heights for the continuous windbreak wall was to express
299 these heights with regards to the train height along with the track. Hence, windbreak wall 1 was meant
300 to be shorter than the train height, windbreak wall 2 was same as the train height and windbreak wall 3
301 was designed to be much taller than train height. All these heights were chosen to assess the sheltering
302 effects of the windbreak walls on the train. In terms of the windbreak walls 4 and 5, the transition
303 regions were chosen in accordance to the appropriateness of the physical angle. Apparently, a transition
304 region of 90° appears to be the “normal” shape as it is the most appropriate physical angle and is also
305 the maximum possible angle. Since 45° transition angle would account for a mid-way between the no
306 transition region (0° transition angle) and maximum transition region (90° transition region), it was also
307 considered in this study. Obviously, due to resource constraints, not every transitional angle can be
308 examined.

309 Figure 7 shows the model set-up at yaw angles of 90°. The figure shows the case with windbreak wall
310 2. In light of the flow characterisation, for a yaw angle of 90°, the model was placed slightly on the left
311 hand side in order to prevent any constraining effects of the wind tunnel side walls on the nose of the
312 train along with an enhanced spanwise uniformity to the onset wind. Also, according to railway
313 standards (CEN, 2018), a minimum distance of 8000 mm with respect to full-scale geometry is required
314 from the nose of the train to the start of the track. Thus, in this study at 1:25 scale, a distance of 300
315 mm was maintained.

316 According to CEN (2018) standards, the blockage ratio is defined at a yaw angle of 30°. In this study,
317 the blockage represented by the train model, STBR and the splitter plate is approximately 6%, based on
318 a length averaged cross-sectional area of the splitter plate at a 30° yawed configuration. It is worth
319 mentioning that the lower bound for the blockage ratio was 6% while the upper bound for the tallest
320 windbreak wall case was 10%. The UoB’s wind tunnel used in this study requires no blockage
321 correction, based on EN 14067-6, Section 5.3.4.7 of CEN (2018). As CEN (2018) states, in closed test
322 sections, the coefficients are overestimated, thus it is conservative not to apply any blockage
323 corrections. Nevertheless, the blockage ratio, defined at a yaw angle of 30°, is recommended to be less
324 than 15%, which was also the case in this study, where the blockage ratio was much lower than 15%.

325 The Mach number is calculated as 0.03 while the ratio of the total length of the train model to the width
326 of the tunnel is 0.75. These factors in addition to the design of the STBR agree well with the CEN
327 (2018) standards. The Reynolds number based on the reference velocity of the wind relative to the train
328 of 7.2 m/s and train height, was $\sim 1 \times 10^5$. It is acknowledged that the Reynolds number of the flow was
329 lower than that specified by CEN (2018), and the turbulence intensity of the flow was 5.5%, which was
330 higher than that specified by CEN (2018). However, the results of this work will be used in the future
331 to validate numerical simulations which will then be further performed to take into consideration flows
332 with higher Reynolds number for some cases.

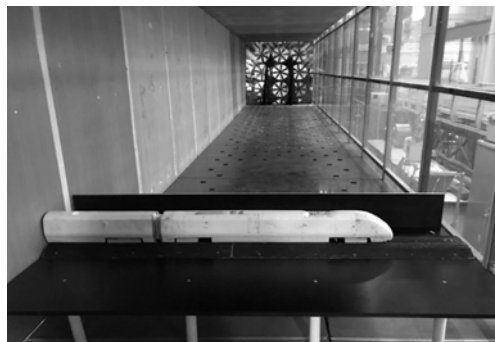

(a)

333

334 Figure 7: The experimental set-up of the models inside the wind tunnel at a yaw angle of (a) 90°.

335

336 3. Results and Discussion


337 3.1. Mean pressure coefficients

338 This section provides and discusses the pressure distribution results obtained over the train surface for
339 experimental cases (a – f) at wind incidence angles of 30° and 90° in terms of a non-dimensional
340 pressure coefficient, C_p :

$$C_p = \frac{P - P_o}{0.5\rho V_{rel}^2} \quad (1)$$

341 where P is the actual surface pressure at a particular pressure tap, P_o is the reference pressure, ρ is the
342 air density and V_{rel} is the reference velocity of the wind relative to the train. In terms of normalising the
343 data for achieving an accurate C_p value for each pressure tap, the reference pressure of a known location,
344 outside the wind tunnel section, was considered. This was done to ensure the location is not affected by
345 the onset wind conditions. For the reference velocity, this was measured at the position of the test
346 models without the presence of the models, prior to the any experimental work. In addition, the mean
347 non-dimensional pressure coefficient, $\overline{C_p}$, provided for each tap was calculated based on the time-
348 average values of the actual surface pressure at a particular pressure tap.

349 As discussed, loops A-N were arranged in a progressive manner from the nose to the tail of the leading
350 car of the model with a total of 162 pressure taps positioned on the first car only. Figure 8 shows that
351 on rotation of the model about its axis, the pressure distribution at each segment was measured in four
352 circumferential sections. It must be noted that the location of pressure taps for each loop differed in
353 sectional placements due to the changing cross section of the train shape. Therefore, the best method of
354 representing data was in a polar coordinate form. The results can be divided into four different sections;
355 where WWS and LWS refer to the windward and leeward side of the model train respectively, ROOF
356 denotes the roof and UB denotes the underbody region of the model. Due to the design of the model,
357 which shows continuous changes in its symmetry, the range of the polar angle varied for each region at
358 different longitudinal positions of the loops i.e. at different distances from the nose of the train, as
359 evident in Figure 4.

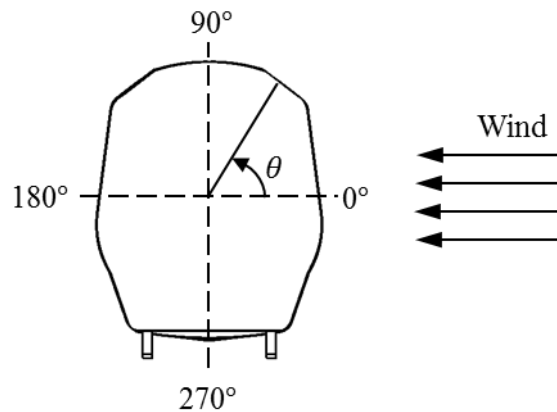

360

361 Figure 8: The orientation of angle θ with respect to onset wind.

362 In terms of the results obtained, different patterns of pressure distribution are evident over the surface
363 of the train. Firstly, it is worth mentioning that the leading car of the Class 390 train has a streamlined
364 design. Therefore, the cross-section of the frontal region of the train, characterised as the nose of the
365 train, presents a significant increase in the cross-sectional area down the train length (from Loops A-
366 C). Therefore, it can be anticipated that this significant change in the frontal part of the train (nose)
367 would impact the results obtained. For simplicity, results on loops B, G and N are illustrated even

368 though measurements were made at 14 loops located at different distances from the nose of the train.
369 Nevertheless, this results section discusses the trend over the entire length of the train.

370

371 3.1.1. Results at a yaw angle of 90°

372 This section aims to discuss the test results obtained at a yaw angle of 90° for the experimental cases (a
373 – f), mentioned in Section 2.3.1.

374 3.1.1.1. Case (a): Track without any windbreak wall

375 Although the main aim of this research was to investigate the effect of different types of windbreak
376 walls on the flow which forms around the train, it was important to first obtain data for a case without
377 any walls and just the model train. This will be used as a benchmark case and will show the intensity
378 of the change in the results.

379 Figure 9 shows the mean surface pressure distribution on loops B, G and N for the case without any
380 windbreak wall at a yaw angle of 90° . In this case, at and near the nose of the train (loops A-B), the
381 highest pressure values (which can also be referred to as the lowest suction values) are observed on the
382 WWS of the model, compared to other regions. This is as expected due to the wind directly impinging
383 on the surface of the vehicle at the WWS thus indicating a region of stagnation at the windward face of
384 the train. As expected, this is the case for all the loops which show positive $\overline{C_p}$ values at the WWS.


385 Based on the results presented in Figure 9, upon transition from the WWS to the ROOF of the model,
386 a sharp decrease in the positive pressure values can be observed signifying a large suction at this point.
387 This suggests that the windward edge on the roof of the train has a significant impact on the flow
388 resulting in a negative gradient of pressure, thus indicating flow separation at this point. For similar
389 flows, based on the train height and free-stream velocity, the flow is expected to separate from the
390 windward corners of the roof (Copley, 1987; Baker and Sterling, 2009), which was also the case in this
391 study. Consequently, the flow tends to show weak suction over the roof of the model while the wake
392 downstream of the model on the LWS seems to show a little effect on the overall pressure distribution.
393 This analysis is based on the magnitude of the $\overline{C_p}$, which appears to be uniform on the leeward face, as
394 the flow progresses.

395 At further distances from the nose of the train, similar trends in the pressure distribution can be seen as
396 compared to loops A and B. Positive pressure peaks are evident on the WWS of the model. Regions of
397 negative pressure are observed on the ROOF and LWS of the model with a strong suction peak obtained
398 in all cases on the windward edge of the roof, as mentioned before. Also, it seems that the flow stabilises
399 from the middle of the roof to the leeward side of the train, as shown by constant pressure values,
400 possibly indicating the reattachment of flow after separation. In terms of the underbody region of the
401 model, slight differences can be seen in the overall results obtained for the flow in this region. These
402 are perhaps not surprising based on the practical limitations and difficulties noted in the experimental
403 set-up. Since the pressure measurement system in this work was not on board and was based externally,
404 the pressure tubes were sourced from the bottom of the model. This might have provided a blockage
405 effect on the flow thus creating the variations in the flow in this small region. The $\overline{C_p}$ in this region
406 tends to vary with showing both positive and negative $\overline{C_p}$ values. Reasons for positive $\overline{C_p}$ in this region
407 could be based on the induction of stagnation area occurring at the upstream WWS, which might
408 influence this region.


409 Finally, according to the results obtained, it can be observed that close to the nose of the train, the
410 pressure varies significantly from one tap to another and also from one loop to the other. This is as
411 anticipated and thus shows the importance and influence of the shape of the nose in any crosswind
412 stability case. However, at distances further down the train, the results tend to become more uniform.

413 However, near the roof of the train, the results show significant changes. Nevertheless, each loop and
414 in fact each measuring point has its own characteristic due to its position and the surrounding influence
415 on the entire train body. Over the middle of the roof, the flow showed uniform results at the tail of the


416 train while the results at the leeward side showed that near the nose of the train, there was a lower $\overline{C_p}$
417 distribution as compared to a farther distance (near the tail), where the $\overline{C_p}$ magnitude decreased and the
418 results provided higher values, comparatively. This indicates the strong characteristics of suction near
419 the nose of the train in the leeward side of the model while a fully developed wake dominated by large
420 vortices forms at the leeward side at much farther distances from the nose. The results and trends
421 presented for this case are very similar to the results obtained by several researchers in the past (Copley,
422 1987; Chiu and Squire, 1992; Baker and Sterling, 2009; Baker, 2010).

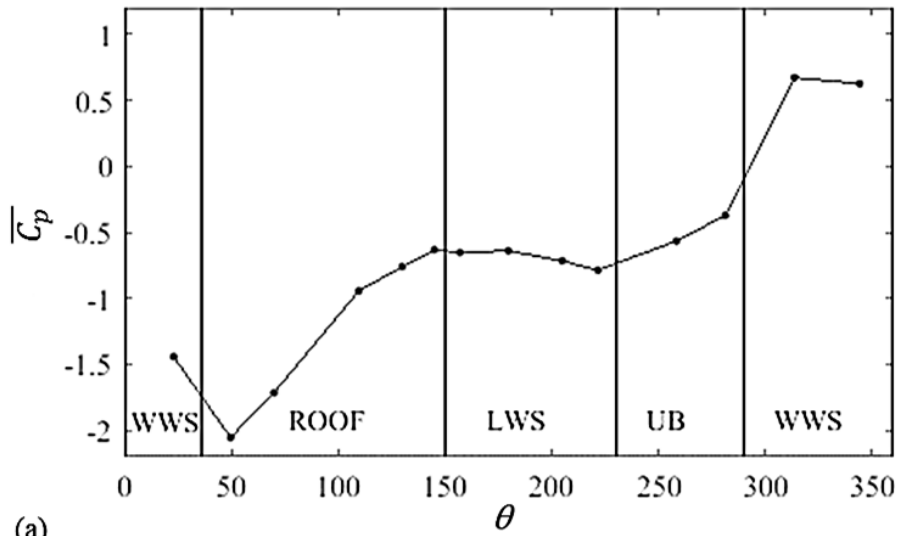

(a)

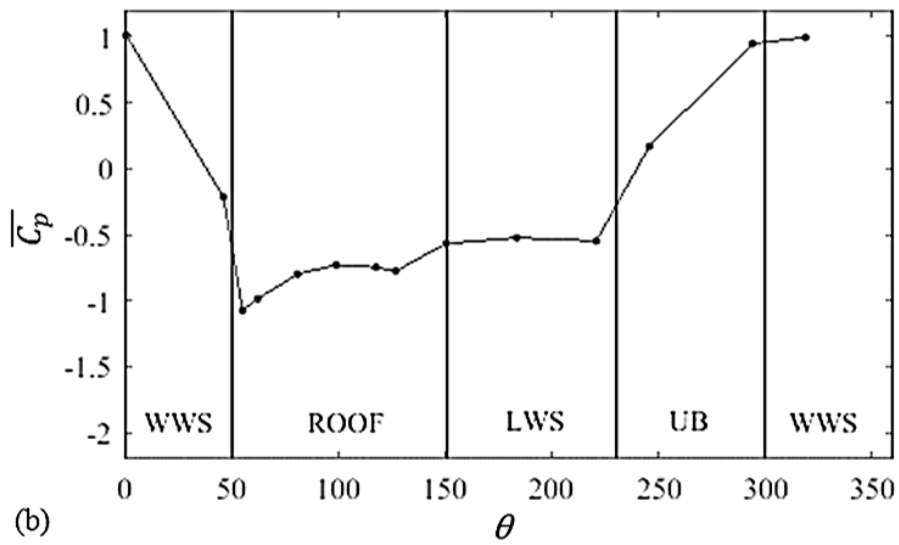

(b)

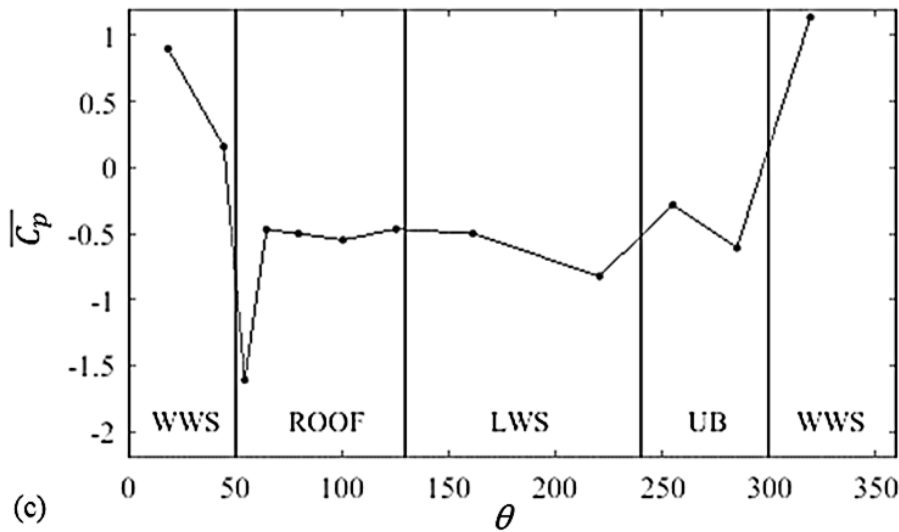

(c)

423

424

425

426

Figure 9: Surface mean pressure coefficient distribution at (a) loop B, (b) loop G and (c) loop N for the configuration without any windbreak walls at a yaw angle of 90°.

3.1.1.2. All windbreak wall cases (b-f)

427 This section presents and discusses the results obtained for cases examining different windbreak walls
428 at a yaw angle of 90° . In order to provide a closer look at the results obtained with different types of
429 windbreak walls, Figure 10 shows a comparison of the different types of windbreak walls examined at
430 three loops, B, G and N. Firstly, it is clearly apparent that the addition of any type of windbreak wall
431 results in a significant difference in the surface pressure as compared to a case with no walls. It can be
432 stated that the addition of any windbreak wall provides more uniform pressure results between adjacent
433 taps with almost constant values as compared to a no wall case where the mean surface pressure varies
434 rapidly when transiting from one region to another. A windbreak wall significantly reduces the intensity
435 of pressures on the windward side of the train while providing some uniformity to the results on the
436 leeward side of the train. These findings clearly make sense as the train is somewhat shielded from the
437 on-coming crosswind flows by the windbreak structures.

438 Precisely, for loops located near the nose such as loop B, the results showed that as the height of the
439 windbreak wall increased (from 160 mm to 260 mm), the $\overline{C_p}$ decreased, possibly due to the increased
440 shielding effect, while the trend depicted over the entire circumference of the loop was similar for all
441 three continuous wall types. Fairly uniform values for $\overline{C_p}$ are present over the windward side and roof
442 of the model. However, for walls consisting of transition regions, it is apparent that wall 5 with a 90°
443 transition region resulted in a higher pressure as compared to wall 4 with a 45° transition region. A
444 significant pressure peak is observed in all cases at the transition from the middle of the roof to the
445 leeward side with wall 5 presenting the weakest suction peak. Moreover, the pressure results were
446 similar for walls 2 and 3; uniform values were obtained for the pressure taps on the WWS of the model.
447 It is likely that these results are due to the fact that these pressure taps were all protected by the oncoming
448 crosswind due to the wall and thus a shielding effect of the windbreak wall. Whereas for wall 1, it can
449 be seen that slight variations in the pressure distribution were apparent on the WWS because of the
450 shorter height of the wall and the crosswind flow separating from the top edge of this wall and directly
451 impacting on the train surface.


452 In terms of the leeward side, the results showed slightly different trends. As shown in Figure 10a, for
453 loop B, Wall 1, which was much shorter in height exhibited the largest change in the results in
454 comparison to the other walls examined. At the leeward edge of the roof, Wall 1 resulted in low pressure
455 results, which then escalated to a higher pressure results as compared to the results obtained with most
456 of the other walls, as the flow progressed on the leeward side. These results may also be affected by the nose
457 region of the train. Similarly, for loop B, the results at the windward side of the model showed uniform
458 values of pressure from one tap to another. Again, wall 3 resulted in the lowest pressure along with wall
459 2 for the WWS and most of the ROOF region. Also, Figure 10a clearly indicates that wall 5 provided
460 the highest pressure results on all the pressure taps located at the windward and roof side and for most
461 of the leeward side while showing clear difference as compared to the results obtained with other walls
462 near the nose of the train.

463 Along the longitudinal length of the train, at positions slightly farther from the nose of the train, it was
464 observed that wall 3, which was the tallest, provided quite uniform results over the windward side of
465 the model. At further distances from the nose of the train, such as at loops G and N, as shown in Figure
466 10b and Figure 10c, it can be observed that wall 4 with a transition region of 45° showed the highest
467 pressure values over most of the circumference of the train. Also, wall 4 usually presented the highest
468 pressure values as compared to wall 5 in some of the regions, as shown in Figure 10b and Figure 10c.
469 One reason for this could also be due to the design of the transition which meant that the distance
470 between the model and wall decreased comparatively. It was also noticed that wall 3 shows the lowest
471 pressure results comparatively. This can be based on the increased height of this wall.

472 In terms of the effect of wall 1 on the pressure distribution results, the shorter height of the wall meant
473 that some of the pressure taps close at the ROOF were exposed to the onset wind and were not provided
474 with any shielding effect of the wall. Thus, the results linked with this wall were noticed to show a
475 sudden increase in pressure values as the flow progressed from the WWS to the ROOF, specifically
476 near the rear end of the train, as shown by Figure 10c. A suction peak can also be found at the windward
477 edge of the roof at loop N. However, along the surface of the roof and all the way to the LWS of the
478 model, the $\overline{C_p}$ values went from a low value to a much higher value. One of the key findings from the

479 results revealed that the frontal loops, which were situated near the nose of the train showed higher $\overline{C_p}$
480 results on the WWS compared to the leeward side, which was masked by either similar values or a little
481 lower $\overline{C_p}$ values. Whereas, at much further distances from the nose of the train, it was observed that the
482 LWS showed much higher $\overline{C_p}$ values when compared to the WWS for all different wall cases. Another
483 interesting finding from the results is based on loop N. Compared to other loops, the circumferential
484 pressure distribution on this loop showed a significant drop in the $\overline{C_p}$ value at the windward edge of the
485 roof, as mentioned earlier. Another suction peak was noticed near the bottom edge of the LWS. These
486 could be based on the fact that loop N was located right at the end of the first car and thus the results
487 could have been influenced by the inter-carriage gap which was next to this loop. The random change
488 in the geometry of the model might have led to the flow vortex being separated at this point thus the
489 strong suction. Close to the rear end of the train, wall 3 was again observed to show the lowest pressure
490 results, mainly due to the abovementioned reason that this wall was the tallest thus was able to provide
491 the greatest shielding effect. Overall, one interesting trend which was observed again was that near the
492 nose of the train, the $\overline{C_p}$ values had a lower value compared to near the tail of the train, where the $\overline{C_p}$
493 showed higher values. It is also worth mentioning that the results for the wall 2 (which was 190 mm
494 tall) were very similar to the results of a continuous wall with a height of 210 mm. Therefore, the results
495 of the latter were not shown in this study as there seemed no point in expressing them.

496 To further elaborate the effect of the sharp transition regions in walls 4 and 5 on the flow around the
497 train, loops near the transition region such as loop G were examined carefully as these were mainly the
498 loops which were under the influence of these regions. As compared to all other loops, the usual trend
499 involved wall 5 showing the highest $\overline{C_p}$ values at the entire circumference of the loops A-D, in
500 comparison to wall 4. Whereas, at loop G, where a sharp transition was present in both the walls, a
501 slight difference in the trend can be observed. At this point, wall 4 with a 45° transition region showed
502 the highest $\overline{C_p}$ results on the roof while wall 5 showed slightly lower $\overline{C_p}$ values over the roof. At loop
503 E (X/L = 0.250), the influence of wall 5 on the flow resulted in a weak suction peak at the middle of the
504 roof of a considerable different magnitude as compared to the results obtained on other pressure taps.
505 This might be an indication of the surface pressure approaching the reference pressure at this particular
506 point, which was clearly under the influence of the sharp transitions in the walls.

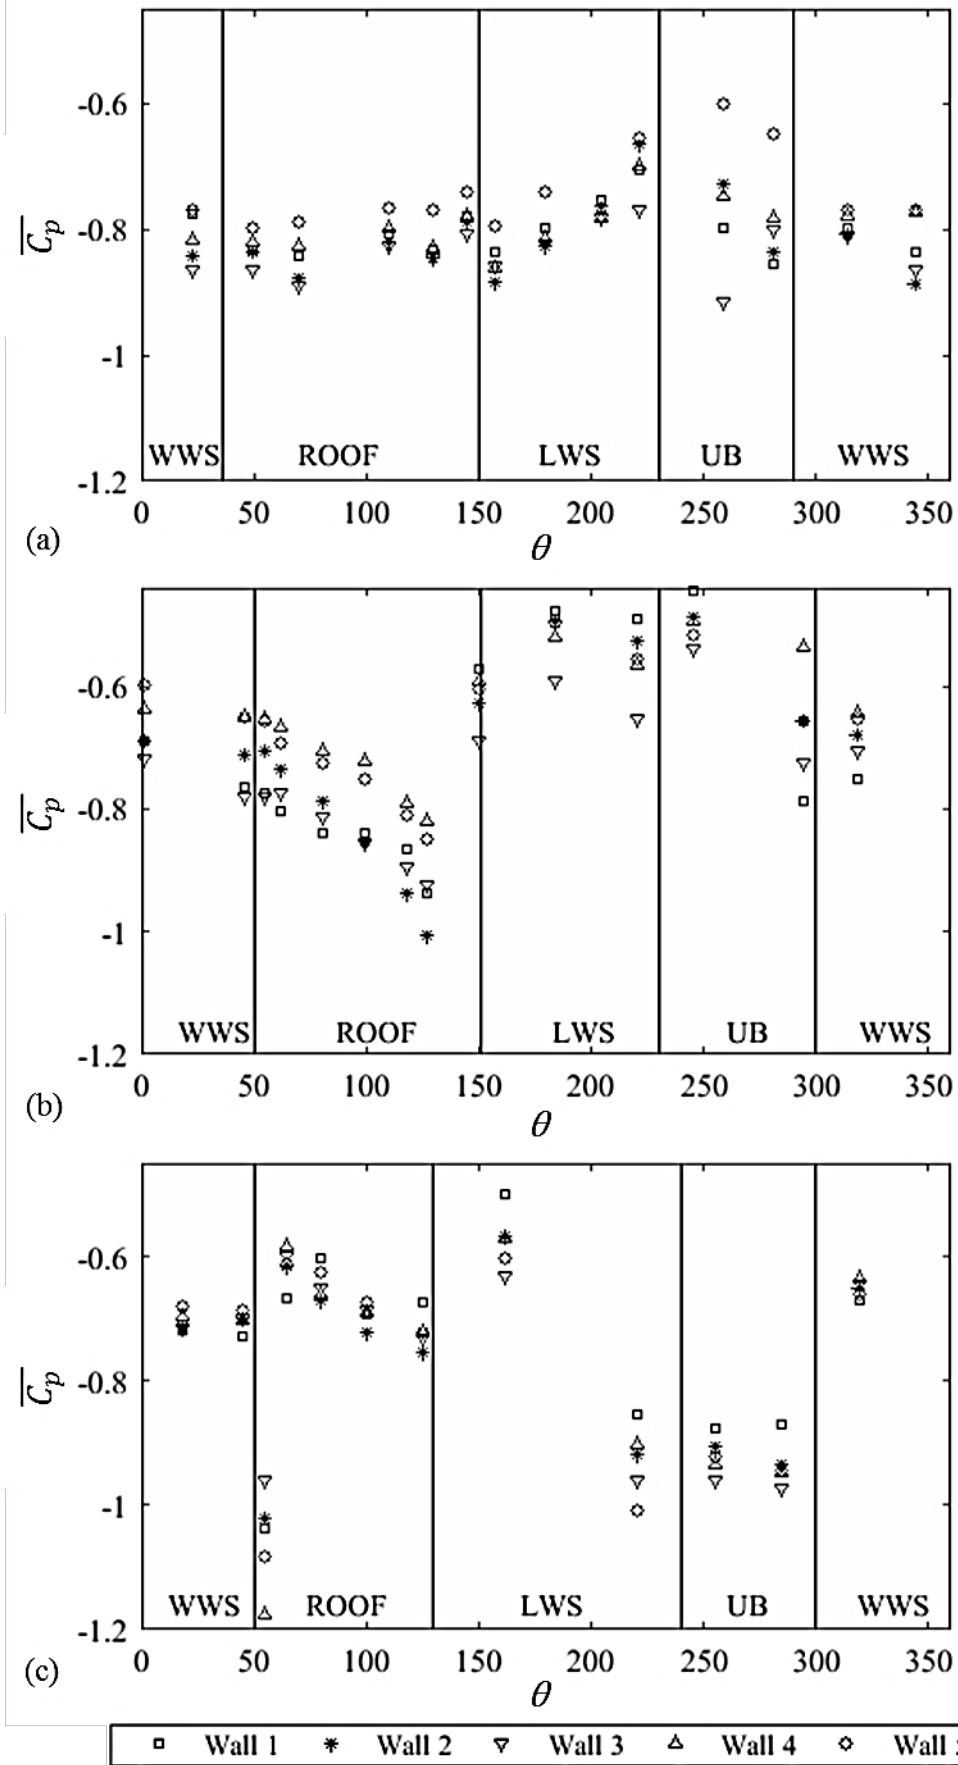

507

508
509


Figure 10: Comparison of the mean surface pressure coefficient distribution at (a) loop B, (b) loop G and (c) loop N for different windbreak wall cases at a yaw angle of 90° .

510 3.1.2. Results at a yaw angle of 30°
511 3.1.2.1. Case (a): Track without any windbreak wall

512 Firstly, it is worth mentioning that in contrast to the results obtained for a yaw angle of 90°, the
513 magnitudes of the results for a no wall case were somewhere near the magnitudes of different wall
514 cases. This was not the case for the former investigation involving a yaw angle of 90°, where the wind
515 was hitting the surface of the train perpendicularly and thus the addition of walls implied that all or at
516 least most of the train surface was covered by the direct impingement of the wind. Nevertheless, a
517 significant difference is still apparent further down the train length and is discussed in this section.

518 For a no wall case, different flow patterns for the mean surface pressure distribution were identified
519 along the longitudinal length of the train, as shown in Figure 11. The nose of the train, which embraced
520 loops A, B and C was characterised by positive values of $\overline{C_p}$ for the WWS and the windward portion of
521 the ROOF. This was the case at each different loop of the train, thus indicating a stagnation region
522 created due to the wind being directly impinged on the surface of the model. As the circumferential
523 pressure distribution results show, on each loop, the positive magnitude of $\overline{C_p}$ appeared to increase
524 initially at the WWS and then this positive magnitude continued to decrease continuously. Around the
525 ROOF, the results for the $\overline{C_p}$ provide a negative gradient as the flow transits from the WWS to the LWS.
526 The transition from a stagnation region to a suction region is obvious from the results.

527 Furthermore, the leeward side of the train was characterised by a region of suction which included the
528 roof of the model as well as the entire leeward side near the nose of the train. The only exception in the
529 results was on loop A, where the magnitude of $\overline{C_p}$ remained positive over the roof as well. This could
530 be due to the reduced cross-sectional area of this loop. Based on these results, a maximum suction peak
531 is observed at the leeward edge of the roof for loops close to the nose of the train, such as loop B, as
532 shown in Figure 11a. This indicates the presence of one or more vortices attached to the train surface
533 which then progressively roll away from the train surface resulting in higher $\overline{C_p}$ values. This finding
534 was also reported by Hemida and Karjnovic (2009) and Dorigatti et al. (2015). However, moving away
535 from the nose of the train, at loops such as loops G and N, as shown by Figure 11b and Figure 11c, a
536 suction peak is found to appear at the windward edge of the roof. This was also the case for a yaw angle
537 of 90°, suggesting a flow separation point at the windward edge of the roof. This echoes previous studies
538 such as Copley (1987) and Baker and Sterling (2009). The flow separates from the windward edge of
539 the roof and does not reattach. Since all adjacent loops seem to show similar results at this point, it can
540 be stated that this vortex is rolling up on the roof. It continues to drift progressively from the edge to
541 the centreline of the roof in some cases (Loop M) before completely detaching away from the train.
542 Moreover, near the rear end of the train, such as at loop N, a weaker suction peak is found at the bottom
543 side of the leeward face. This suction peak might be related to a vortex which emanates from the leeward
544 edge of the LWS. Overall the results and trends presented for this case are very similar to the results
545 obtained by several researchers in the past (Copley, 1987; Hemida and Karjnovic, 2009; Dorigatti et
546 al., 2015).

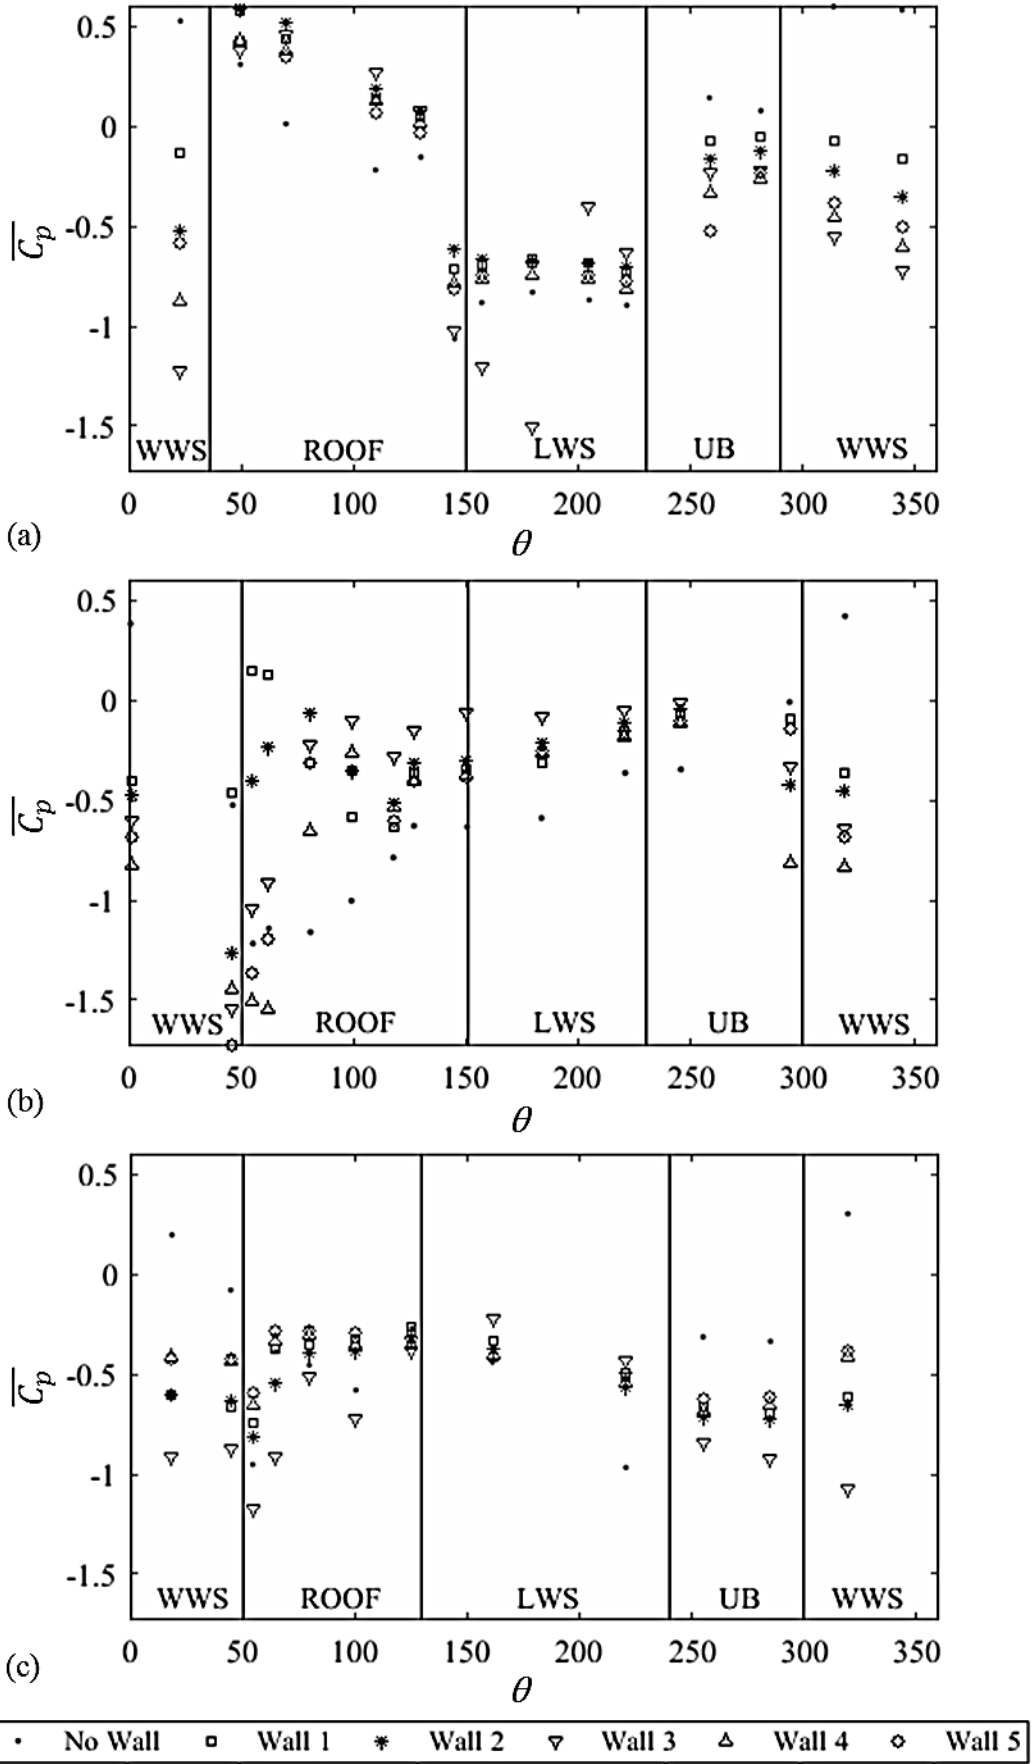

547

548

549

Figure 11: Comparison of the mean surface pressure coefficient distribution at (a) loop B, (b) loop G and (c) loop N for all cases examined at a yaw angle of 30° .

550 3.1.2.2. All windbreak wall cases (b-f)

551 The different types of windbreak walls showed a significant difference in the trend of the results as
552 compared to a no wall case, as evident in Figure 11. Firstly, for all walls, a similar trend was observed
553 for the circumferential pressure distribution. On the WWS, near the nose of the train, such as at loop B,
554 shown by Figure 11a, similar behaviour was observed as to the no wall case; however, the magnitude
555 of the $\overline{C_p}$ values varied significantly. For a no wall case, the WWS showed a stagnation region
556 characterised by positive $\overline{C_p}$ values; whereas, the addition of walls led to a region of suction on the
557 WWS, as anticipated from the 90° results presented in section 3.1.2. Comparatively, the lowest $\overline{C_p}$ value
558 was provided by the tallest wall, wall 3, and the highest $\overline{C_p}$ was shown by the shortest wall, wall 1 on
559 the WWS. Following on, the circumferential pressure distribution showed that on the nose of the train,
560 the walls led to a higher value of $\overline{C_p}$ for each case for the ROOF region. This indicates that the walls
561 were able to provide a shielding effect to the WWS of the model but in case of the roof, the wind was
562 able to directly impinge and create stagnation regions thus producing large positive pressure values.
563 The $\overline{C_p}$ values then dropped significantly as the flow transits from the ROOF to the LWS, producing
564 regions of suction in the LWS. For the shorter height wall, wall 1, a similar trend was seen near the nose
565 of the train with a positive $\overline{C_p}$ peak occurring at the windward edge of the roof, while suction peaks
566 were observed at the leeward edge of the roof and at the bottom of the leeward face (loop B). Away
567 from the nose of the train, at loops G and N, as depicted by Figure 11b, a suction peak was observed at
568 the windward edge of the roof; however this was not the case for other loops. A similar trend was also
569 noticed at a yaw angle of 90°. Walls 2 and 3 showed somewhat similar results in comparison to each
570 other with wall 3 showing the lowest $\overline{C_p}$ distribution. One interesting finding was that the LWS of the
571 model depicted a smooth pressure distribution near the nose of the train with the use of wall 2, which
572 was not the case for the tallest wall (wall 3). In terms of transition regions in walls 4 and 5, near the
573 nose of the train, wall 5 presented higher $\overline{C_p}$ values as compared to wall 4 over the WWS. However, in
574 the same region as the flow progressed around the surface of the train, wall 5 presented the lowest $\overline{C_p}$
575 values compared to wall 4. In order to determine the effect of the sharp transitions on the exact location
576 where these were situated, the respective loops which were under the influence of the sharp transitions,
577 such as loop G, were carefully examined; results on Loop G are presented in Figure 11b. At the WWS,
578 wall 4 showed the lowest $\overline{C_p}$ distribution not only compared to wall 5 but to all other walls. An
579 interesting phenomenon revealed at yaw angle of 30° was that walls 4 and 5, with transition regions,
580 led to more uniform results where $\overline{C_p}$ was seen to approach zero. These uniform results with small
581 variations indicate the smooth pressure distribution around the train signifying the complete detachment
582 of any vortical structures from the train body, especially at the LWS of the model.

583 3.2. Overall aerodynamic load coefficients

584 Under the action of crosswinds, a vehicle experiences several flow patterns around its body. As a result,
585 a pressure distribution forms around a body leading to a series of aerodynamic loads to develop. These
586 aerodynamic loads, which act on a train, can be classified as aerodynamic forces and moments.

587 Section 3.1 discussed the pressure results on the train surface for different cases by expressing the
588 surface pressure distribution as a non-dimensional mean pressure coefficient, $\overline{C_p}$. This section aims to
589 provide an analysis on the overall mean aerodynamic load coefficients for the side (lateral), $\overline{C_y}$, and lift
590 (vertical), $\overline{C_z}$, forces along with the rolling moments about the X-axis and leeward rail, $\overline{C_{M_x}}$ and $\overline{C_{M_{x,lee}}}$,
591 respectively, for different test cases. Generally, these coefficients are considered as the main
592 components of the aerodynamic loads and are usually examined for cases involving the investigation
593 of train stability under crosswinds (Baker et al., 2004; Sanquer et al., 2004; Baker et al., 2009; RSSB,
594 2009; Cheli et al., 2011; Dorigatti et al., 2015; Gallagher et al., 2018).

595 In this study, the overall mean aerodynamic load coefficients were calculated using a methodology
596 based on the measurement of surface pressure distribution over the train surface. This approach has
597 been successfully used in several earlier studies as well (Sanquer et al., 2004; Dorigatti et al., 2015;
598 Gallagher et al., 2018) and basically, involves the discrete integration of the mean pressure coefficient
599 distribution over the train surface. This is achieved by converting the model surface into a simplified

600 geometry composed of discrete rectangular surfaces. While each discretised surface is centred on a
601 pressure tap, the edges of the surfaces extend all the way to the midpoint between two neighbouring
602 pressure taps or the model edges for outer end taps. This discretisation of the model surface area into a
603 number of smaller areas around each pressure tap assumes that the pressure measured at each individual
604 pressure tap is constant and uniformly distributed across the corresponding surface. This methodology,
605 in fact, is an excellent approach when the surfaces associated to each pressure tap are small, especially
606 where the pressure gradient is high. Similarly, the Class 390 model used in this study was discretised
607 into longitudinal stripes consisting of one loops of taps each. Forces on each surface were then
608 calculated using the mean pressure coefficients.

609 The mean overall load coefficients for the entire vehicle can be defined as (Dorigatti et al., 2015):

$$\overline{C_Y} = \sum_j \left[\sum_i \frac{\overline{C_{p_{i,j}}} A_{i,j} (\mathbf{n}_{i,j} \cdot \mathbf{y})}{A_{ref} L_j} \right] L_j \quad (2)$$

$$\overline{C_Z} = \sum_j \left[\sum_i \frac{\overline{C_{p_{i,j}}} A_{i,j} (\mathbf{n}_{i,j} \cdot \mathbf{z})}{A_{ref} L_j} \right] L_j \quad (3)$$

$$\overline{C_{M_x}} = \sum_j \left[\sum_i \frac{\overline{C_{p_{i,j}}} A_{i,j}}{A_{ref} L_j H_{ref}} \frac{\|\mathbf{d}_{i,j} \times \mathbf{n}_{i,j}\|}{\mathbf{x}} \right] L_j \quad (4)$$


$$\overline{C_{M_{x,lee}}} = \sum_j \left[\sum_i \frac{\overline{C_{p_{i,j}}} A_{i,j}}{A_{ref} L_j H_{ref}} \frac{\|\tilde{\mathbf{d}}_{i,j} \times \mathbf{n}_{i,j}\|}{\mathbf{x}} \right] L_j \quad (5)$$

610


611 Where, based on the model discretisation, i is the index for an individual pressure tap on each loop, j is
612 the index for the loops consisting of pressure taps and corresponds to the stripes of the discretised train
613 geometry, $\overline{C_{p_{i,j}}}$ and $A_{i,j}$ represent the mean pressure coefficient value and the discretised area of each
614 rectangular surface, respectively, A_{ref} is the nominal side area of the Class 390 leading car (78.66 m²
615 at full-scale), H_{ref} is the nominal height of the Class 390 leading car (3.159 m at full-scale) and L_j is
616 the length of each longitudinal stripe on the discretised model. Furthermore, considering a 2D
617 simplification for an individual loop (at a known X/L), \mathbf{n}_i is the normal unit vector relative to each
618 surface, associated to each pressure tap, i , \mathbf{d}_i is the vector directed from the longitudinal axis (X) to the
619 midpoint (pressure tap) of each surface and $\tilde{\mathbf{d}}_i$ is the corresponding of \mathbf{d}_i but beginning from the leeward
620 rail. Finally, \mathbf{x} , \mathbf{y} and \mathbf{z} are the unit vectors related to the X, Y and Z axes.

621 Figure 12 and Table 3 show the calculated values for the overall mean aerodynamic load coefficients
622 over the entire unit length of the vehicle for the different test cases at 90° and 30° yaw angles.

623

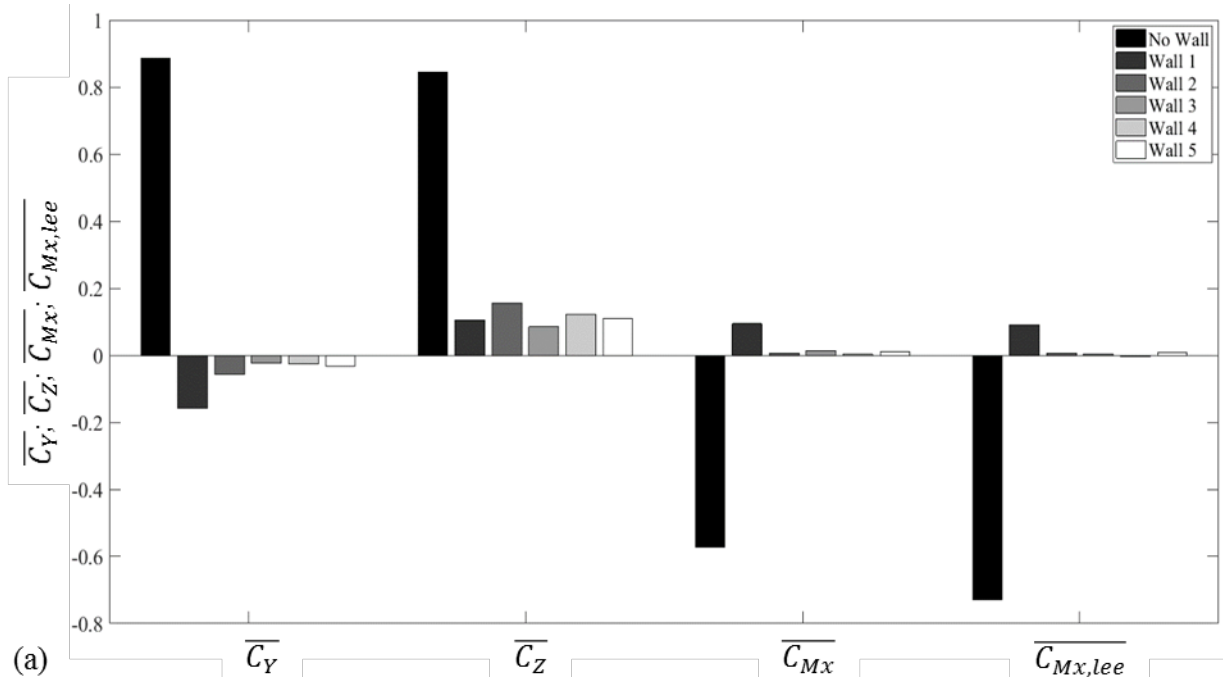

624

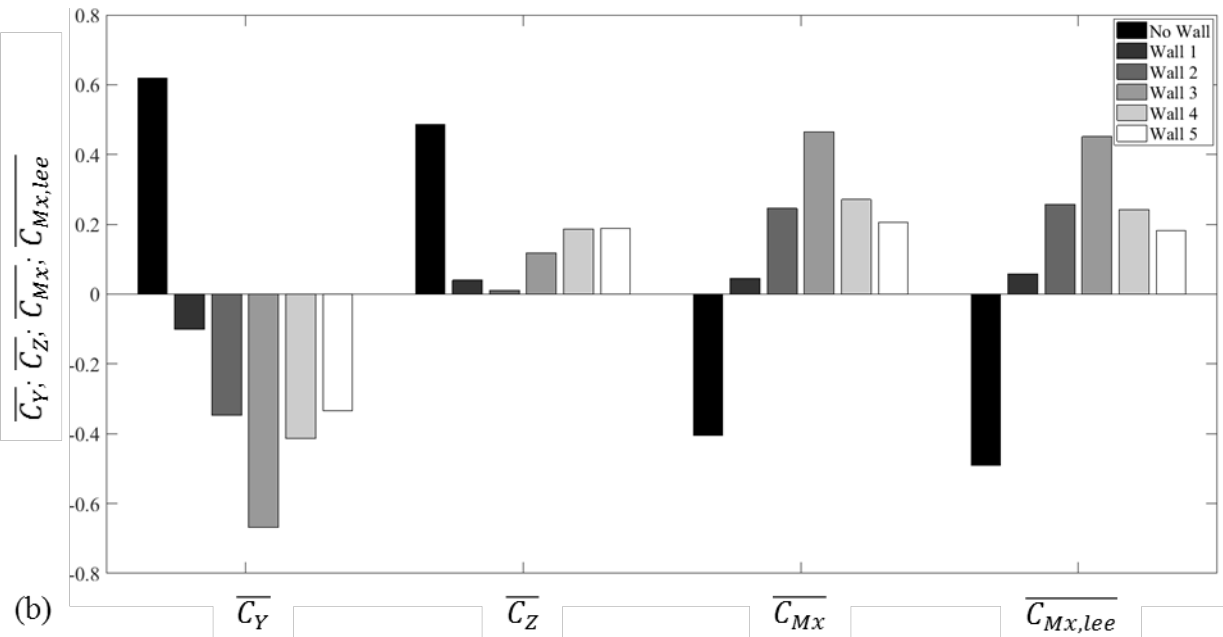

625 Figure 12: Overall mean aerodynamic load coefficients for different test cases at a yaw angle of (a)
 626 90° (b) 30°.

Cases	Yaw angle of 30°				Yaw angle of 90°			
	\bar{C}_Y	\bar{C}_Z	\bar{C}_{M_x}	$\bar{C}_{M_{x,lee}}$	\bar{C}_Y	\bar{C}_Z	\bar{C}_{M_x}	$\bar{C}_{M_{x,lee}}$
No Wall	0.620	0.487	-0.404	-0.490	0.886	0.844	-0.573	-0.730
Wall 1	-0.101	0.040	0.045	0.058	-0.158	0.106	0.094	0.090
Wall 2	-0.348	0.011	0.246	0.257	-0.057	0.156	0.006	0.006
Wall 3	-0.669	0.118	0.465	0.451	-0.024	0.085	0.014	0.004
Wall 4	-0.413	0.187	0.271	0.243	-0.026	0.122	0.003	-0.004
Wall 5	-0.335	0.188	0.206	0.183	-0.033	0.110	0.012	0.008

627

Table 3: Overall mean aerodynamic load coefficients for different test cases.

628

629 In terms of the results, side forces are a measure of the difference in pressure between the WWS and
630 LWS. As noted earlier, WWS experiences positive pressures, contrary to LWS which experience
631 negative pressure. These two effects conjoin together to form an overall side force. Therefore, positive
632 values of $\overline{C_Y}$ indicate that the side force is directed according to the crosswind flow while positive $\overline{C_Z}$
633 values refer to the lift force being directed upwards. Likewise, for rolling moments, $\overline{C_{M_X}}$ and $\overline{C_{M_{X,lee}}}$,
634 based on the reference system about the centre of track and leeward rail, respectively, negative values
635 refer to overall moments which tend to overturn the vehicle.

636 3.2.1. Results at a yaw angle of 90°

637 3.2.1.1. Case (a): Track without any windbreak wall


638 For the case with no wall, since the crosswinds were able to impact the train surface directly, high
639 positive values for $\overline{C_Y}$ and $\overline{C_Z}$ were noticed, as illustrated in Figure 12a. This validates the point that the
640 action of wind can clearly lead to the overturning or derailment of a vehicle. At a yaw angle of 90°,
641 slightly higher magnitudes were observed for the force coefficients as compared to 30°. This is again
642 as expected, signifying the increased overturning probability when the crosswind blows perpendicularly
643 to the direction of travel of the vehicle. This is also in agreement with earlier studies, which show that
644 the aerodynamic force coefficients tend to increase in magnitude with an increase in the yaw angle
645 (Baker et al., 2009). Furthermore, at a yaw angle of 90°, the rolling moment about the leeward had a
646 larger negative value compared to the rolling moment about the X-axis. This is an important finding as
647 Baker et al. (2009) mentions that usually for rail vehicles, the rolling moment about the leeward rail is
648 required for overturning risk calculations. This result is due to the fact that the vertical force, which is
649 directed upwards contributes to the lee-rail rolling moment while it does not contribute to the rolling
650 moment about the X-axis.

651 Figure 13 presents the results for the mean load coefficients per unit length for different test cases at a
652 yaw angle of 90°. The presented results show only eight of the loops along the length of the train body
653 as other loops were equipped with only a few pressure taps.

654 Firstly, based on Figure 13a, it can be observed that the entire train model is characterised by positive
655 values of $\overline{C_Y}$ per unit length except on loop A. This shows that a lateral net force exists in the direction
656 of wind and thus indicates the stagnation and suction pressure regions which are present on the WWS
657 and LWS of the train. The side force coefficients seem to increase on the nose of the train and then
658 decrease along the length of the train body with the exception being on loops D and N. Considering the
659 shape of the Class 390 model and based on the results, it seems that the central part of the model has
660 slightly more stability. Also, a higher side force coefficient at loop N probably indicates the effects of
661 space size behind the leading car and in front of the second car.

662 Positive values of the lift force coefficients are observed on the entire train body, as shown by Figure
663 13b. The lift force coefficients also follow the same trend as side force coefficients around the nose
664 region of the train. However, at positions further from the nose, the lift force coefficients tend to
665 decrease with the exception being at loop H. Since the lift force coefficient at each loop is evaluated
666 based on the balance between the pressures on the ROOF and the UB region, it can be noticed that the
667 UB region of loop H has a higher pressure as compared to the ROOF thus the high value.

668 In terms of the rolling moments, as illustrated in Figure 13b and Figure 13c, it is worth mentioning that
669 the side force contributes to an overall overturning moment, which then leads to negative $\overline{C_{M_X}}$ values.
670 Therefore, both $\overline{C_{M_X}}$ and $\overline{C_{M_{X,lee}}}$ values follow a similar trend as the side force coefficient along the
671 length of the train body. Overall, it can be stated that the side force contribution to the rolling moments
672 is dominant as compared to the lift force on any loop of the train. Nevertheless, the positive lift force
673 coefficients are also able to increase the negative magnitudes of both $\overline{C_{M_X}}$ and $\overline{C_{M_{X,lee}}}$ per unit length at
674 any loop thus increase the overturning moment of the vehicle.

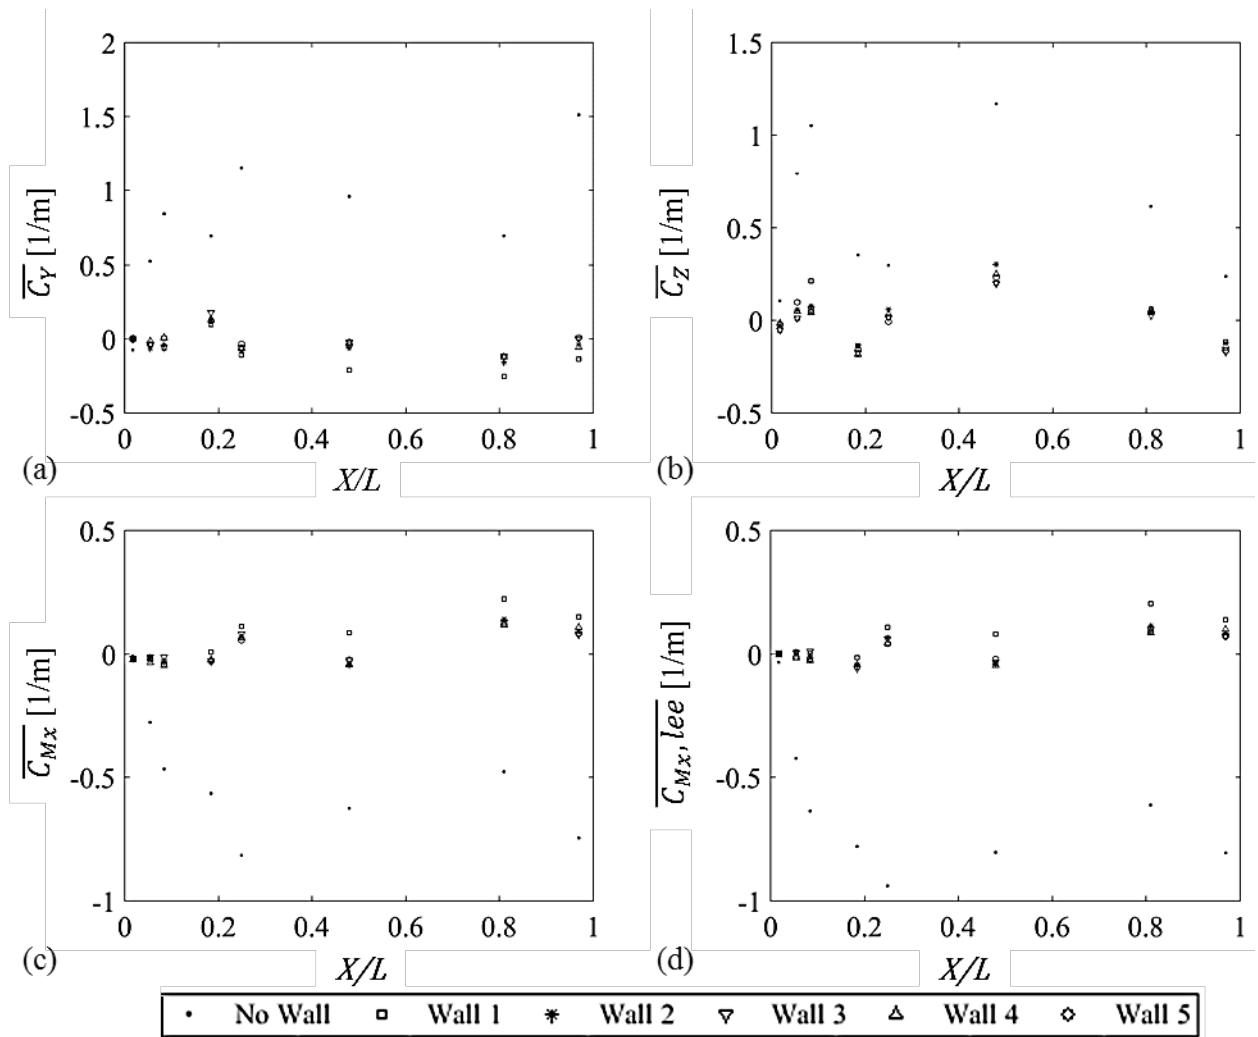

675

676 Figure 13: (a) Mean side force coefficient per unit length (b) mean lift force coefficient per unit length
 677 (c) X-axis mean rolling moment coefficient per unit length (d) Leeward rail mean rolling moment
 678 coefficient per unit length at a yaw angle of 90°

679

3.2.1.2. All windbreak wall cases (b-f)

680

681 A comparison between the no wall and with wall cases shows clearly that the overall \overline{C}_Y values for
 682 most loops of the train changed from positive to negative with the addition of any wall, as illustrated in
 683 Figure 12a. This was as expected and shows the huge impact of windbreak walls. The shielding effect
 684 of windbreak walls results in negative and in some cases negligible overall \overline{C}_Y values. An unusual trend
 685 seems to appear at loop D for all cases at a yaw angle of 90° . Positive values of the side force coefficients
 686 per unit length are observed in all cases. As Dorigatti et al. (2015) described, such a situation is an
 687 indication of the lateral net force which exists in the direction of wind. Based on the respective
 688 stagnation and suction regions of this loop, it is clearly evident that an intense low-pressure peak exists
 689 on the LWS of the loop, which might reflect the presence of vortices in this region and hence the positive
 690 \overline{C}_Y results. Overall, the negative side force coefficient values for the different windbreak walls at other
 691 loops decrease in magnitude with an increase in wall height. The lift force coefficients at an individual
 692 loop can be noticed to decrease in magnitude with an increasing wall height. Also, it appears that the
 transitional walls show results similar to Wall 3, the tallest wall.

693

694 A comparison on the results with and without transitional windbreak walls on loops E and H shows that
 695 there are not major differences in the results. However, Wall 5 with a transition region of 90° seems to
 have slightly lower magnitudes of rolling moments around the transition regions.

696 3.2.2. Results at a yaw angle of 30°


697 3.2.2.1. Case (a): Track without any windbreak wall

698 For the case with no wall at both yaw angles, since the crosswinds were able to impact the train surface
699 directly, high positive values for $\overline{C_Y}$ and $\overline{C_Z}$ were noticed, as shown in Figure 12. Furthermore, at a yaw
700 angle of 30°, shown in Figure 12b, the rolling moment about the leeward had a larger negative value
701 compared to the rolling moment about the X-axis. This trend was also observed for the yaw angle of
702 90° and also in similar investigations carried out earlier (Dorigatti et al., 2015) As mentioned earlier,
703 this result is due to the fact that also the vertical force, which is directed upwards, contributes to the lee-
704 rail rolling moment while it does not contribute to the rolling moment about the X-axis.

705 Figure 14 presents the results for the mean load coefficients per unit length for different test cases at a
706 yaw angle of 30°. The presented results show only eight of the loops along the length of the train body
707 as other loops were equipped with only a few pressure taps. Based on the results, it can be observed that
708 the entire train model is characterised by positive values of $\overline{C_Y}$ per unit length. This shows that a lateral
709 net force exists in the direction of wind and thus indicates the stagnation and suction pressure regions
710 which are present on the WWS and LWS of the train.

711 As shown by Figure 14a, the side force coefficients seem to increase on the nose of the train with
712 maximum values being reached at loops B and C. This is expected as the results agree with the study
713 presented by Dorigatti et al. (2015) and the reason for this is the existence of low-pressure, suction
714 peaks which exist in the LWS sections. Slightly lower side force coefficients at some positions of the
715 train sections indicate the absence of low-pressure peaks in the LWS of the train and the reduced
716 intensities of pressure fields on the WWS and LWS. Also, a higher side force coefficient at loop N
717 probably indicates the effects of space size behind the leading car and in front of the second car. Positive
718 values of the lift force coefficients are observed on the entire train body as portrayed by Figure 14b. The
719 lift force coefficients also follow the same trend as the side force coefficients around the nose region of
720 the train. In addition, positive values of $\overline{C_Z}$ are also characterised by the suction on the upper face of the
721 train being more intense than the UB region. Lower $\overline{C_Z}$ values along the length of the train refer to the
722 low-pressure peaks found on the roof.

723 In terms of the rolling moments shown in Figure 14c and Figure 14d, the side force contributes to an
724 overall overturning moment and negative $\overline{C_{M_X}}$ and $\overline{C_{M_{X,lee}}}$ values occur which follow a similar trend as
725 the side force coefficient along the length of the train body. Once again, the side force contribution to
726 the rolling moments can be seen to be dominant as compared to the lift force on any loop of the train.

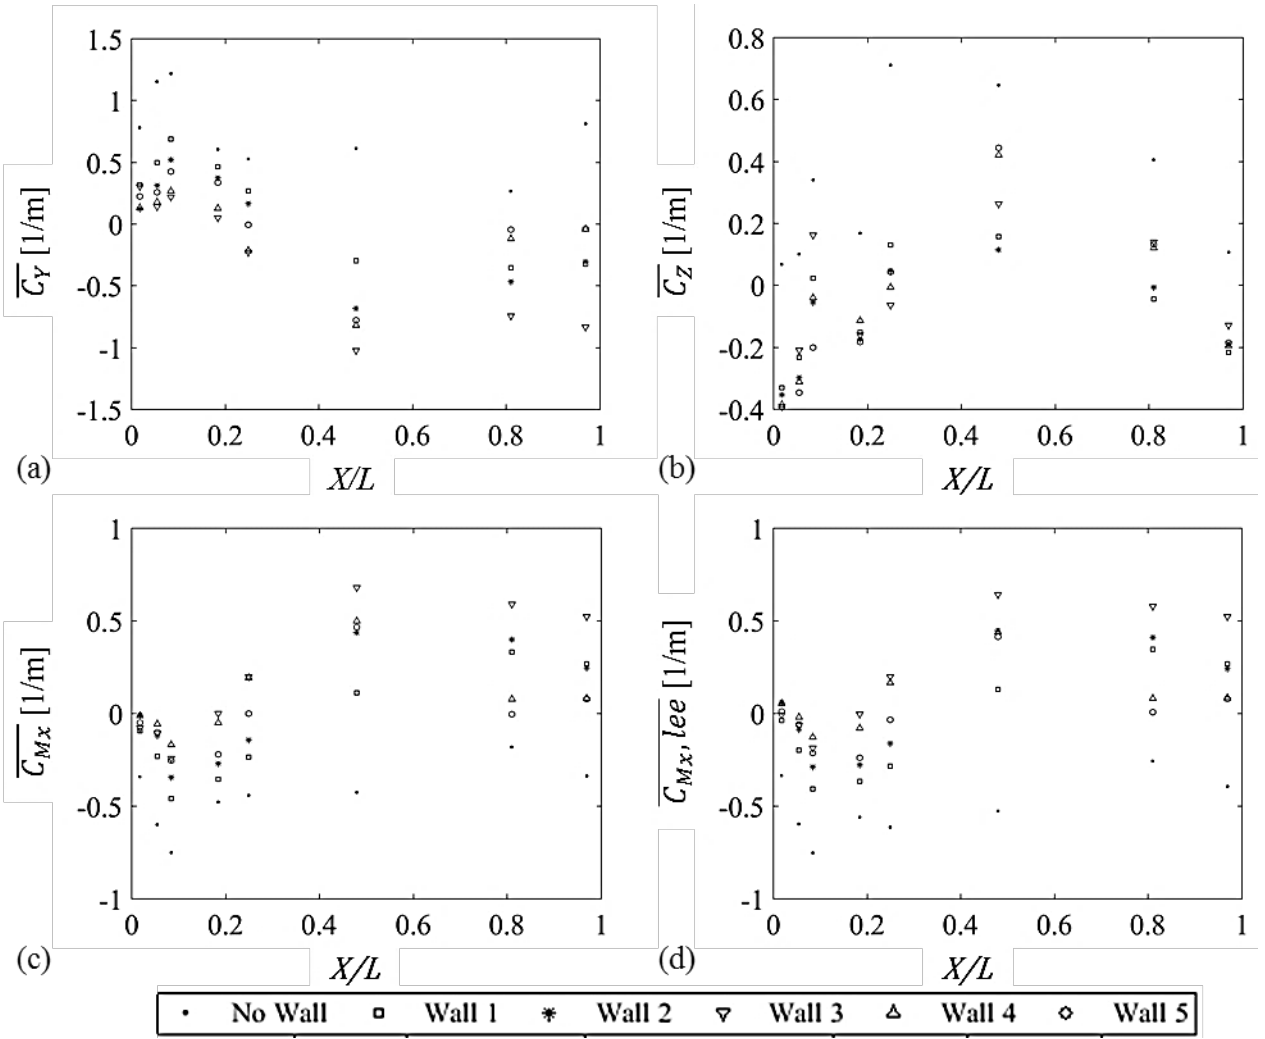

727

728 Figure 14: (a) Mean side force coefficient per unit length (b) mean lift force coefficient per unit length
 729 (c) X-axis mean rolling moment coefficient per unit length (d) Leeward rail mean rolling moment
 730 coefficient per unit length at a yaw angle of 30°

731

3.2.2.2. All windbreak wall cases (b-f)

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

For all the wall cases, a comparison shows that the nose region and sections slightly father from the nose region are characterised by positive side force coefficient values. However, from the central part to the tail of the train, negative side force coefficients are evident. This is due to the practical limitations experienced at a yaw angle of 30° which meant that some onset wind was able to attack the train surface, potentially the nose region. The shielding effect of windbreak walls is apparent as the magnitude of the overall $\overline{C_Y}$ values decreases with an increase in the height of the walls, as shown in Figure 14b. However, it is apparent that the results for the side force coefficient along with the resulting rolling moment coefficient tend to become sensitive to the overall increase in height of the windbreak wall. To elaborate, with windbreak wall 3, $\overline{C_Y}$ becomes increasingly negative at this wind incidence angle. This would mean that this particular configuration would be worse in terms of safety than the case without any windbreak wall. This is because the train would be at a higher risk of overturning in the opposite direction with respect to wind. The main reason for such a result could be based on the practical limitations of the experimental work at the wind incidence angle of 30° , as discussed earlier. Also, opposite to higher wind incidence angles, it is clear that at lower wind incidence angles, while the windbreak wall height has a sheltering effect on the WWS of the train, a possible vortex is generated due to an increased windbreak wall height (i.e. wall 3). This then produces a strong suction in the LWS that can result in the overturning of the train in the windward direction. This result is confirmed by

749 Figure 11a, which shows the increased negative $\overline{C_p}$ at the nose of the train. Further from the nose of the
750 train, this is not the case due to the setup of the geometry. The lift force coefficients for the different
751 wall cases follow the same trend as the case without a wall, however with much lower magnitudes,
752 comparatively. Negative lift force coefficients at the nose of the train indicate a force directed
753 downwards. This is mainly due to the intense stagnation over the roof of the nose of the train and low
754 pressures in the UB regions. Thereafter, positive lift force coefficients are visible over some loops
755 indicating the reduced magnitude and extensions of the stagnation regions on the roof. Moving on
756 towards the rear of the train, the $\overline{C_y}$ values per unit length tend to reduce due to the existence of low-
757 pressure peaks on the roof side of the train. Since the overturning moments are dependent mainly on
758 the side force, the roll moments are mostly characterised by negative values for the nose region of the
759 train. However, these roll moments then become positive near the rear of the train. In terms of the effects
760 of the transition regions on loops E and H, the result show that wall 5 with a transition region of 90°
761 leads to much lower overturning moments hence signifying the stability this wall provides to the overall
762 train body. In fact, detailed analysis on the results show that the lowest roll moments at loop E were
763 obtained from the use of Wall 5. This was also the case for the yaw angle of 90° .

764 3.3. Effect of varying wind incidence angles on the mean pressure coefficients


765 Similar to section 3.1, this section provides and discusses the pressure distribution results obtained over
766 the train surface for the experimental cases (g – j) in terms of a non-dimensional pressure coefficient,
767 C_p . For simplicity, results on only certain important loops are illustrated. Nevertheless, this section
768 discusses the trend and results over the entire length of the train.

769 3.3.1. Case (g): Track without any windbreak wall

770 Figure 15 shows the $\overline{C_p}$ distribution at loop B and loop G of the train at varying wind incidence angles
771 for the case without any windbreak wall, respectively. With reference to Loop B, it is apparent that at
772 lower wind incidence angles (i.e. at 20° and 30°), the overall pressure results are much lower as
773 compared to the other wind angles on the WWS. As wind incidence angles increase from 20° to 60° ,
774 the surface pressure also starts to increase with the highest surface pressure obtained at a wind incidence
775 angle of 60° . These trends can be simply explained by the geometry set up, where at lower incidence
776 angles, the train acts as a barrier and thus blocks the flow. An interesting trend appears after the wind
777 incidence angle of 60° , where it is visible that the wind incidence angle of 70° , 80° and 90° results in
778 quite similar results at the WWS of the train. Also, the resulting surface pressure at these wind angles
779 is in the mid-range of the lowest and highest pressure results achieved at those particular tappings. At
780 the windward edge of the roof, a drop in surface pressure is observed where lower surface pressure
781 results are yielded at higher wind incidence angles as compared to the lower wind incidence angles.
782 This phenomenon stays valid over the roof. As the flow progresses over the train surface, the flow tends
783 to show weaker suctions over the roof of the model while the wake of the model on the LWS seems to
784 have a little effect on the overall pressure distribution. These trends have been discussed earlier as well
785 in section 3.1.1.1. Hence, to be more specific in terms of the different wind incidence angles in the
786 LWS, the wind incidence angle of 50° seems to result in the lowest yet varying pressure distribution
787 while higher wind incidence angles such as 60° to 90° lead to a uniform pressure distribution in the
788 wake of the train.

789 Further away from the nose of the train, over the WWS and the roof of the train, the trend in the surface
790 pressure distribution is same, however, the magnitude of the pressure values is different. Particularly in
791 the WWS of the train, similar to Loop B, the wind incidence angle of 20° results in lower pressure
792 results as compared to other increasing wind incidence angles. However, over the roof and the LWS of
793 the train, the wind incidence angle of 20° results in the highest pressure distribution comparatively.
794 Dissimilar to Loop B, it appears that near the midpoint of the train and at distances farther from the
795 nose of the train, the pressure distribution is similar in terms of the trends it adopts regardless of the
796 wind incidence angles, with obvious differences in terms of the magnitude of the pressure values. This
797 also shows the importance of the nose of the train as it confirms its influence on the flow fields around
798 the train.

799 Towards the rear of the first car of the train, it is apparent that from 20° to 50° of wind incidence angle, the pressure results follow a similar trend in the WWS with the lowest pressure results being yielded at
 800 the lowest wind incidence angle. As the wind incidence angle increases, the highest wind incidence
 801 angle results in the highest surface pressure distribution. This is as expected due to the increased
 802 possibility of the direct impingement of wind on the train surface at increased wind incidence angles,
 803 thus resulting in stagnation regions. Over the windward edge of the roof, a sharp decrease in pressure
 804 is observable where strong suction represents the possible detachment of flow vortices. Compared to
 805 the other loops, which were at a lesser distance from the nose of the train, it appears that strong suction
 806 are evident near the tail of the train. This aspect has already been discussed in section 3.1.1.1. As the
 807 flow progresses, uniform pressure distribution is obtained at the LWS with the lower wind incidence
 808 angles resulting in higher pressure results, comparatively.
 809

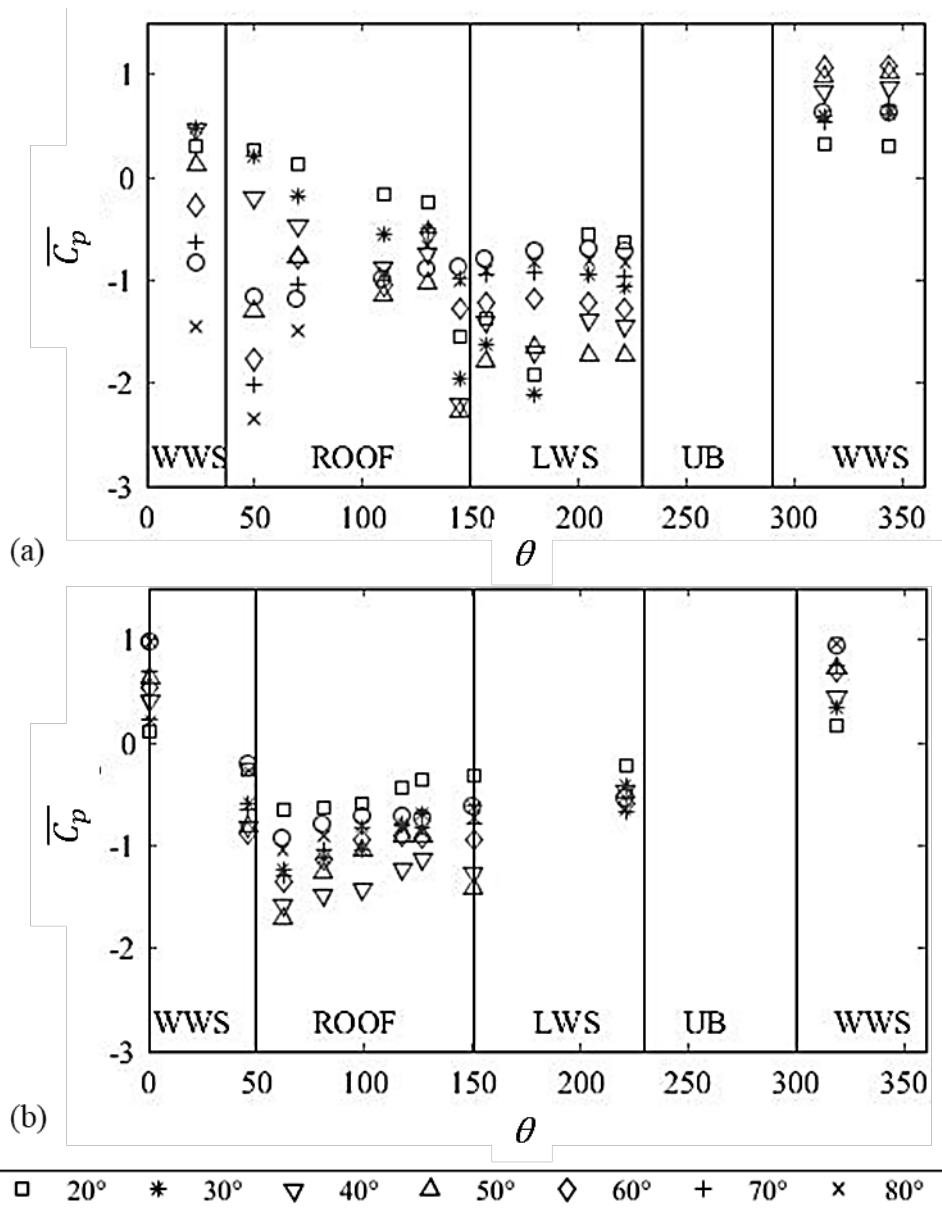

810 \square 20° * 30° ∇ 40° \triangle 50° \diamond 60° + 70° x 80° \circ 90°
 811 Figure 15: Surface mean pressure coefficient distribution at (a) loop B and (b) loop G for varying wind
 812 incidence angles without the presence of any windbreak walls.


813
 814

815 3.3.2. Case (h): Track with windbreak wall 4 (Height of 210 mm with a 45° transition angle) in
816 the WWS

817 Figure 16 shows the $\overline{C_p}$ distribution at loop B and loop G of the train for varying wind incidence angles
818 with the windbreak wall 4 (i.e. the windbreak wall with the transition region of 45°) in the WWS of the
819 train, respectively. The results near the nose of the train show a fairly interesting trend where it is
820 apparent that at higher wind incidence angles (i.e. at wind incidence angles from 50° to 90°), the
821 shielding effect of windbreak walls was able to play a role, hence resulting in much uniform pressure
822 distribution as compared to the lower wind incidence angles. In addition, even though the windbreak
823 wall was designed in order to barricade the oncoming flow, it appears that at a wind incidence angle of
824 20° and to some extent at wind incidence angles of 30° and 40° as well, a strong suction point existed
825 at the windward edge of the roof. This was not the case for higher wind incidence angles. Also, over
826 the roof of the train, lower wind incidence angles resulted in higher pressure results as compared to the
827 uniform resulting effects of the windbreak wall at higher wind incidence angles. Nevertheless, in terms
828 of the leeward side, it was observed that the wind incidence angles do not have a major effect on the
829 pressure distribution with somewhat uniform results achieved at higher wind incidence angles.
830 However, compared to other wind incidence angles, the wind incidence angle of 60° results in much
831 lower surface pressure results mostly, specially over the roof and the LWS of the train. It could be
832 interpreted from these results that apart from a wind incidence angle of 20°, which seems to be one of
833 the most severe cases, the shielding effects of the windbreak wall 4 are apparent.

834 Away from the nose of the train, near the midpoint, the results show that all wind incidence angles lead
835 to a fairly uniform pressure distribution with the lowest pressure results observed at lower wind
836 incidence angles. An interesting trend is evident at the windward edge of the roof where it can be
837 observed that at higher wind incidence angles (i.e. from 50° to 90°), a uniform constant pressure
838 distribution is obtained. However, for lower wind incidence angles at the same point, there is a sharp
839 increase in the surface pressure. This signifies the possible reattachment of flow in this region at lower
840 wind incidence angles (i.e. 20° to 40°) where it is also apparent that the windbreak wall was not able to
841 provide a complete shielding effect. The effect of the wind incidence angles is also apparent in the LWS
842 of the train.

843 Towards the rear of the train, it appears that as the wind incidence angle is increased, the resulting
844 pressure decreases with lower surface pressure distribution achieved at the highest wind incidence
845 angle. This was the case over the entire circumference of the train for loops located at the end of the
846 first car such as loop M. A strong suction peak exists in the middle of the roof and the leeward edge of
847 the roof. This is also discussed in detail in section 3.1.1.2.

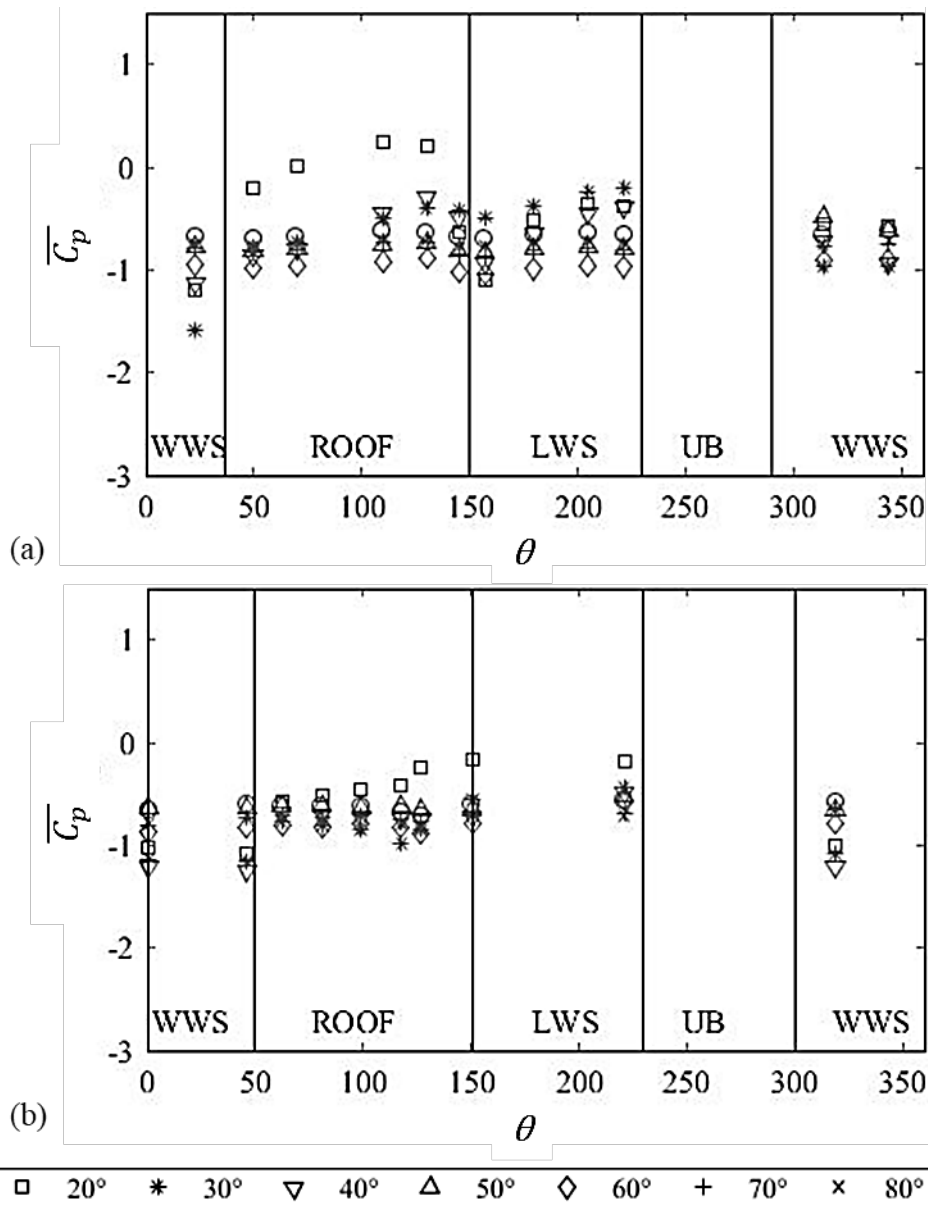

848

849 Figure 16: Surface mean pressure coefficient distribution at (a) loop B and (b) loop G for varying wind
 850 incidence angles with the windbreak wall 4 in the WWS.

851 3.3.3. Case (i): Track with windbreak wall 5 (Height of 210 mm with a 90° transition angle) in
 852 the WWS

853 Figure 17 shows the $\overline{C_p}$ distribution at loop B and loop G of the train for varying wind incidence angles
 854 with the windbreak wall 5 (i.e. the windbreak wall with the transition region of 90°) in the WWS of the
 855 train, respectively.


856 Compared to the results obtained with the windbreak wall 4, slightly different results were obtained
 857 with the use of windbreak wall 5. At the nose of the train, while a suction point exists at the windward
 858 edge of the roof at lower wind incidence angles, similar to with the use of windbreak wall 4 along with
 859 an increase in pressure over the roof, a suction peak no longer exists in the LWS of the train. However,
 860 one interesting finding is apparent at a wind incidence angle of 60°. If the two windbreak walls with
 861 transition regions (i.e. walls 4 and 5) are compared, it is clearly visible that while a uniform surface
 862 pressure distribution is achieved with the use of windbreak wall with a transition region of 45°, this is
 863 not the case with the windbreak wall with a transition region of 90°. With the latter, a varying flow field
 864 is apparent indicating some disturbances in the flow, specifically at this wind incidence angle. At such

865 a wind incidence angle, it seems that a windbreak wall with a transition region of 45° is a better option.
866 Also, any positive pressure values with the use of a windbreak wall indicate that the wind flow was able
867 to directly impinge and create stagnation regions. A physical interpretation of this trend could be that
868 while the oncoming flow was able to separate from the top edge of the windbreak wall, it possibly
869 reattached at the leeward edge of the roof. It also appears that at certain wind angles, the wind flow was
870 able to directly impinge and create stagnation regions thus producing large positive pressure values. For
871 higher wind incidence angles, i.e. 70° to 90° , the surface pressure distribution is fairly similar and
872 uniform over the entire circumference of the train. This is as expected due to the complete shielding
873 effect of the windbreak wall.

874 At the midpoint of the train, as seen in Figure 17b, due to the difference in the geometry of the
875 windbreak walls 4 and 5 (i.e. the difference in the shapes of the transition regions), the results seem to
876 have a resulting effect. To elaborate, in terms of the WWS of the train, at lower wind incidence angles
877 (i.e. 20° to 40°), it is visible that the windbreak wall 5 results in much higher surface pressure results as
878 compared to the results obtained with the use of windbreak wall 4. Another interesting point is the
879 windward edge of the roof where the use of windbreak wall results in a sharp increase in pressure but
880 the use of windbreak wall 5 has no resulting significant impact on the surface pressure. Once again, at
881 lower incidence angles the flow of the LWS of the train shows some differences when compared for
882 cases with windbreak walls 4 and 5, respectively. Following on, at higher incidence angles, i.e. from
883 50° to 90° , not only do the results show a uniform pressure distribution over the entire train surface, the
884 results for windbreak walls 4 and 5 are quite similar in terms of the trends and to a certain extent in
885 magnitude. It is worth mentioning that the results of these experimental cases (g – j) are similar to the
886 ones mentioned in section 3.1.1.2 for cases (a – f).

887 Towards the rear of the train, it is clear that the trend is very similar for both cases (h) and (i). This is
888 mainly because the results at this section are at a farther distance from the actual position of the
889 transition region. Nevertheless, some differences exist in these two cases at the same loop at some wind
890 incidence angles. This shows that the wind incidence angle along with the shape of the transition region
891 may have an impact on the train even at positions much further away from the point, which was directly
892 under the impact of the transition region.

893

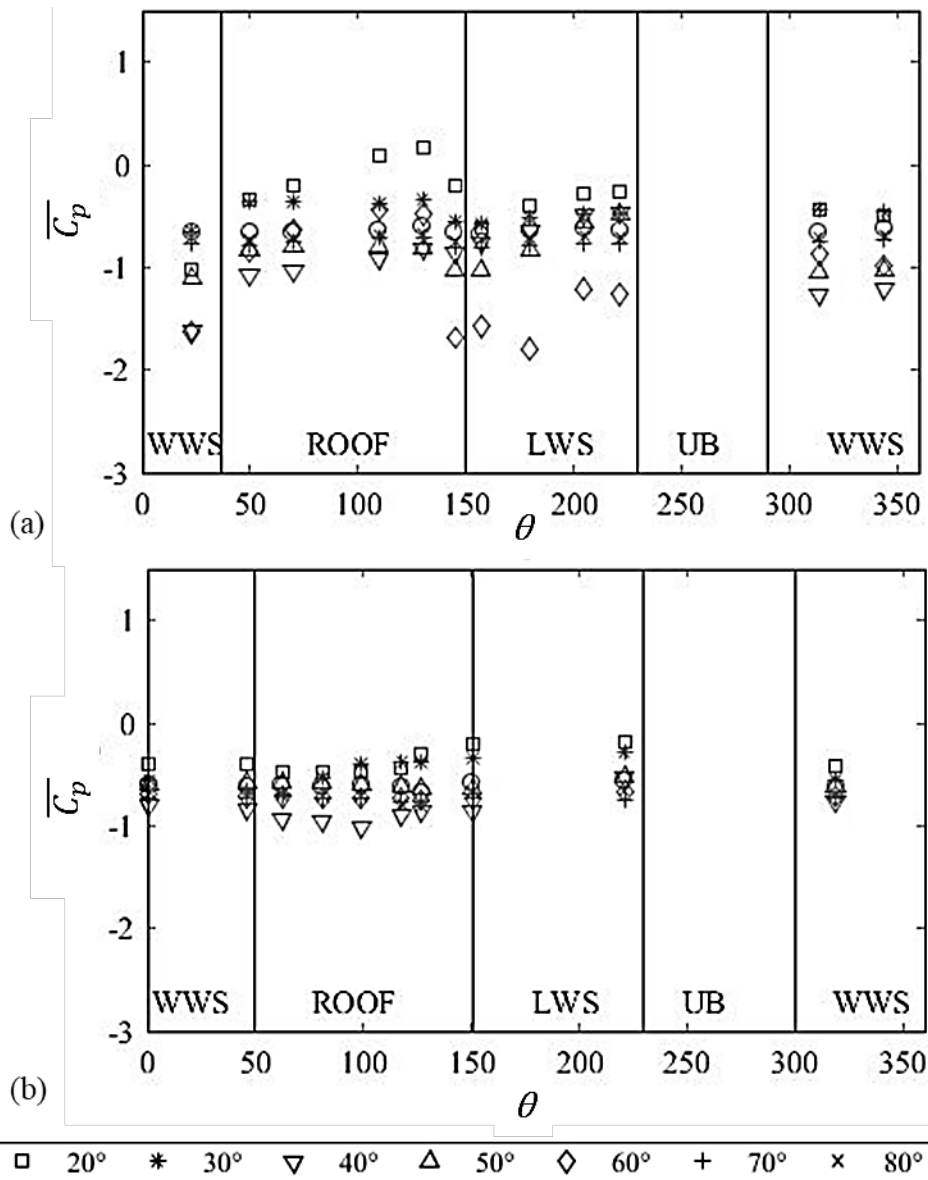

894

895 Figure 17: Surface mean pressure coefficient distribution at (a) loop B and (b) loop G for varying wind
 896 incidence angles with the windbreak wall 5 in the WWS.


897 3.3.4. Case (j): Track with windbreak wall 2 (Height of 190 mm) in the LWS

898 Figure 18 shows the surface mean pressure coefficient distribution at loop B for varying wind incidence
 899 angles with the windbreak wall 2 (i.e. the continuous windbreak wall with the same height as the train
 900 height) in the LWS of the train. This experimental case allowed for modelling the windbreak wall
 901 behind the train (i.e. downwind). In order to understand the impact of a windbreak wall behind the train,
 902 the results of this case were compared with the case where no windbreak wall was used. Overall, as
 903 expected, no differences were observed in the WWS. Up till a wind incidence angle of 50°, the trend of
 904 the surface pressure distribution was similar for the two cases. Over the entire circumference of the train
 905 at loop B, from 20° to 50° of wind incidence angle, the case with no windbreak wall resulted in lower
 906 results as compared to the case with the windbreak wall behind the train. Also, not significant
 907 differences in the magnitude of the pressure distribution were observable at all wind incidence angles
 908 over the roof of the train. Moreover, in the wake of the flow, from 60° to 80° of wind incidence angle,
 909 while the case with no windbreak wall resulted in uniform pressure, the addition of a windbreak wall
 910 behind the train resulted in a lower but non-uniform surface pressure distribution.

911 At slightly further distances from the nose and at lower incidence angles, the results of the surface
 912 pressure distribution are similar to the case without the presence of any windbreak wall. However,
 913 although the trend is similar, the magnitude of the surface pressure distribution is different with the wall
 914 2 in the LWS always resulting in higher pressures, specifically in the LWS. Slight differences arise
 915 from a wind incidence angle of 60°, where the comparison between the two cases tend to show similar
 916 results over the circumference of the loops. Also, the wall in the LWS continues to yield higher pressure
 917 results, comparatively.

918 Further on, towards the rear of the train for lower wind incidence angles, while the pattern of the surface
 919 pressure distribution is similar to the case without the presence of any windbreak wall, it is observed
 920 that the windbreak wall on the LWS of the train does lead to a reduction in the haphazard pressure
 921 distribution over the train's circumference. Although the fluctuations exist in terms of the flow as it
 922 transits from one pressure to the other, these are less severe, comparatively. Moreover, at slightly higher
 923 wind incidence angles (i.e. 50° and 60°), an irregular trend is observed over the roof of the train. This
 924 can be based on the nature of the wind incidence angle, which allows for lower pressure values with the
 925 use of a windbreak wall in the LWS. However, as the wind incidence angle increases further (i.e. 70°
 926 to 90°), both the trend and the magnitude of the surface pressure results are very similar to the case
 927 without any windbreak wall in the LWS.

928

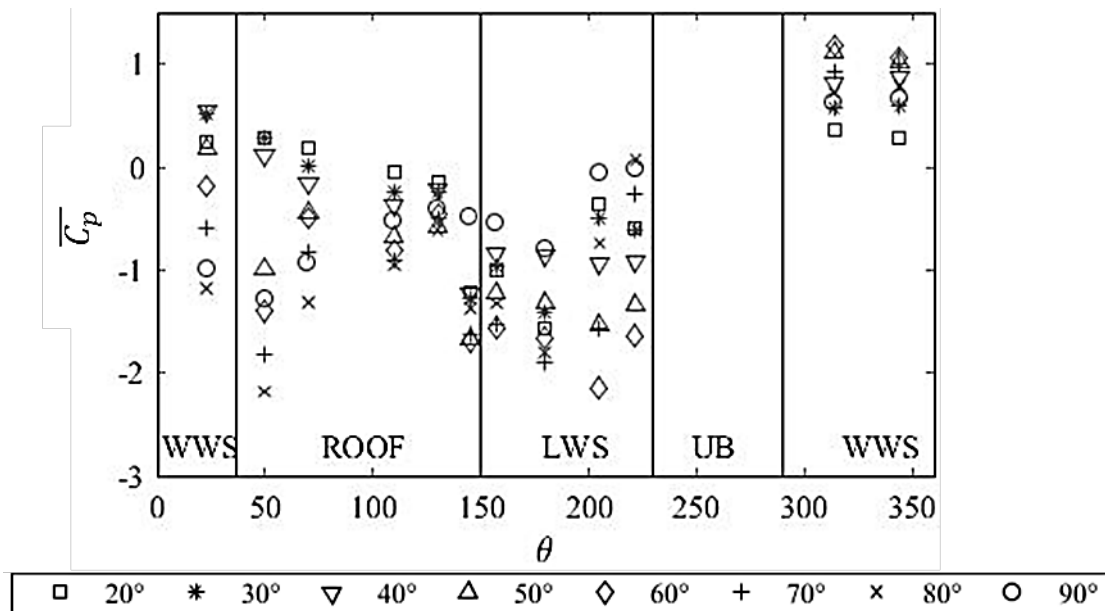

929


930 Figure 18: Surface mean pressure coefficient distribution at loop B for varying wind incidence angles
 931 with the windbreak wall 2 in the LWS.

932 3.3.5. Case (k): Track with windbreak wall 4 (Height of 210 mm with a 45° transition angle) in
 933 the WWS and windbreak wall 2 (Height of 190 mm) in the LWS

934 Figure 19 shows the comparison of surface mean pressure coefficient distribution at loop B for wind
 935 incidence angles of 30° and 90° for cases (e), (f) and (k), where 2 walls represent case (k). The purpose
 936 of such a test was to test the effect of two barriers on the overall flow. Hence, this experimental case
 937 allowed for modelling windbreak walls both, upwind and downwind the train. The comparison showed
 938 that the results for case (k) follow the same trend as case (e).

939 For the wind incidence angle of 30°, the results for case (k) agree with the results for case (e) in the
 940 WWS, as expected, with no major differences. Only differences observed were on the roof of the train
 941 where the use of two walls resulted in an increased $\overline{C_p}$ distribution. However, over the rest of the LWS
 942 of the train, the results for case (k) agree well with the results for case (e).

943 For the wind incidence angle of 90°, overall, slightly higher $\overline{C_p}$ results were obtained with the use of
 944 two windbreak walls, but the trend was same as mentioned above. Away from the nose of the train,
 945 further down the body, the results did not show any significant differences.

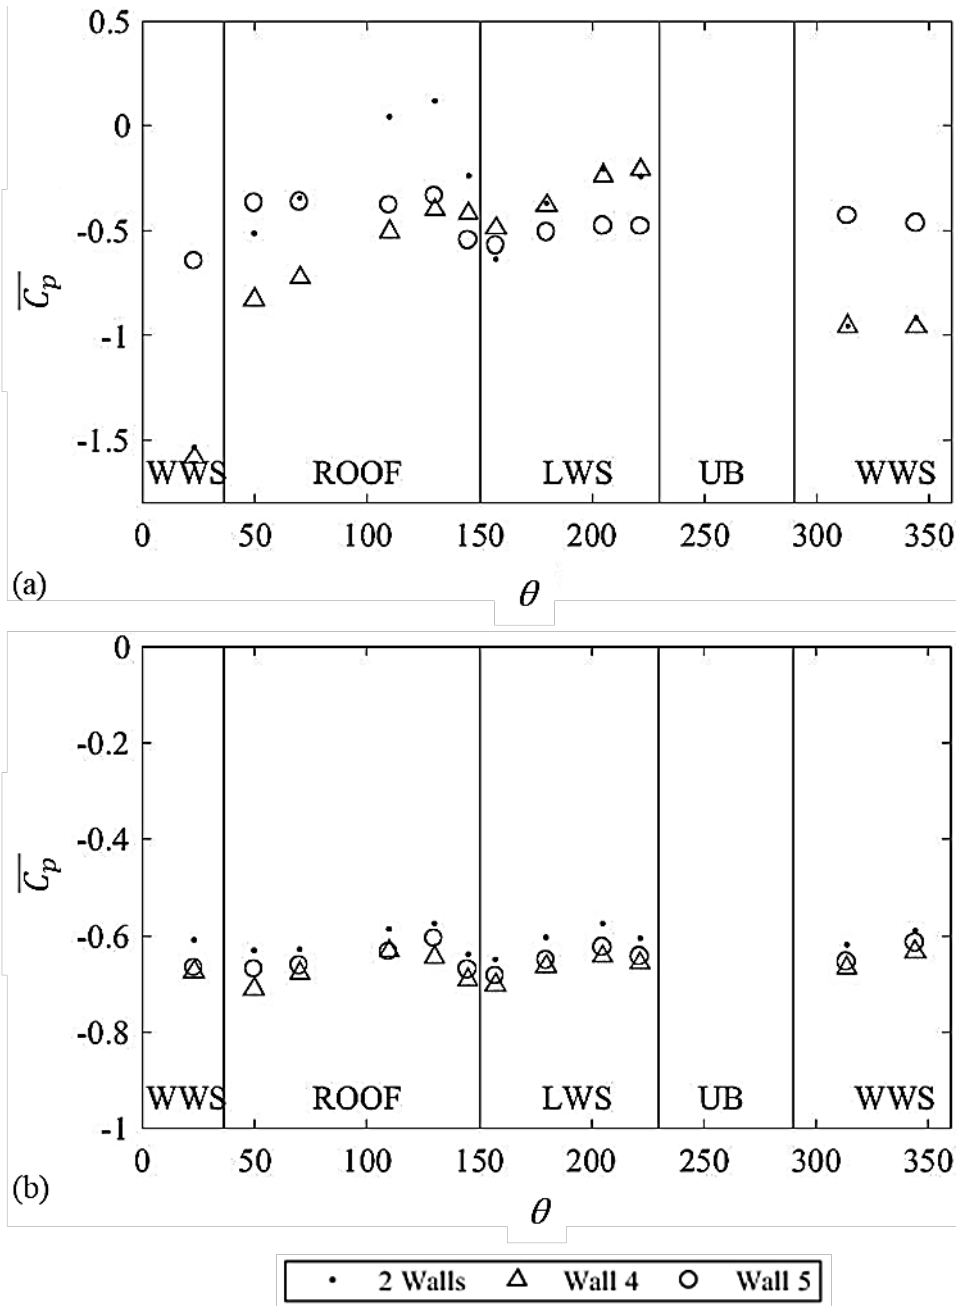

946

947 Figure 19: Comparison of surface mean pressure coefficient distribution at loop B for wind incidence
 948 angles of (a) 30° and (b) 90° for cases (e), (f) and (k).

949

950 **4. Conclusions**

951 For the first time, this novel experimental study investigated the influence of windbreak walls with
 952 varying angles of transition regions on the flow around a model-scale passenger train. A series of wind
 953 tunnel tests were carried out for a number of windbreak walls at varying yaw angles. Windbreak walls
 954 were found to cause varying pressure distributions on the train surface. The results presented indicate a
 955 number of important findings:

- 956 • For the 90° yaw angle, in comparison to different windbreak walls, the windbreak wall with a
957 90° transition angle usually led to the highest $\overline{C_p}$ distribution on the train surface near the nose,
958 while the tallest wall resulted in the lowest $\overline{C_p}$ distribution, mostly.
- 959 • At transition regions, at a yaw angle of 90°, a slight change in the results was observed where
960 the wall with a 45° transition region showed the highest $\overline{C_p}$ distribution as compared to all other
961 walls.
- 962 • Most differences in the results were observed at the windward side as compared to the leeward
963 side thus suggesting the detachment of the flow in the wake of the flow.
- 964 • For the 30° yaw angle, up to the nose region of the train, the tallest wall was observed to result
965 in the lowest $\overline{C_p}$ distribution over the circumference of the train; while the shortest wall showed
966 the highest $\overline{C_p}$ distribution.
- 967 • In terms of transition regions at a yaw angle of 30°, near the nose of the train, the wall with a
968 transition angle of 90° provided the highest $\overline{C_p}$ results as compared to the wall with a transition
969 angle of 45°. Beyond the nose region (loop D onwards), the wall with a transition angle of 45°
970 was seen to result in the lowest $\overline{C_p}$ results as compared to all other walls along the longitudinal
971 length of the body. From loop L onwards, the influence of the tallest wall on the flow resulted
972 in the lowest $\overline{C_p}$ distribution.
- 973 • Walls with transition regions led to more uniform results where $\overline{C_p}$ was seen to approach zero.
974 These uniform results with lesser variations indicate the smooth pressure distribution around
975 the train signifying the complete detachment of any vortical structures from the train body.
- 976 • Generally, a strong vortex can lead to the sharp transition or drop in the $\overline{C_p}$.
- 977 • Overall, the addition of windbreak walls led to uniform results in the LWS comparatively,
978 possibly due to the detachment of the flow in the wake region; while the shielding effects of
979 different windbreak walls were clearly evident over the entire train body.
- 980 • In terms of the differences in the results obtained for the yaw angles of 30° and 90°, it was
981 observed at 30° yaw angle that due to the orientation of the model, both positive and negative
982 $\overline{C_p}$ values were revealed, whereas at 90° yaw angle, the windbreak walls resulted in all lower
983 $\overline{C_p}$ values.
- 984 • A comparison between the no wall and with wall cases shows clearly that the overall $\overline{C_y}$ values
985 for most loops of the train changed from positive to negative with the addition of any wall at
986 both yaw angles. This was as expected and shows the huge impact of windbreak walls. Also,
987 the shielding effect of windbreak walls results in negative and in some cases negligible overall
988 side force coefficient values.
- 989 • Although lift force coefficients remained positive even after the addition of windbreak walls,
990 the intensity of change between the results was clear reflecting on the significant impact of
991 walls.
- 992 • Almost negligible rolling moments were observed with the use of windbreak walls at a yaw
993 angle of 90° and somewhat positive rolling moments were observed with the use of windbreak
994 walls at a yaw angle of 30°.
- 995 • The use of a windbreak wall in the LWS of the train seems unnecessary, as the flow does not
996 seem to be significantly affected by the presence of this wall. However, the wall does lead to
997 less fluctuations in the rapid transitions in the pressure over the circumference of the train.
- 998 • The use of a splitter plate does not have a significant effect on the velocity profile.
- 999 • Every wind incidence angle, each loop and in fact each measuring pressure tap has its own
1000 characteristics due to its position and the surrounding influence. Yet, the results of all
1001 experimental cases are related to a certain extent.
- 1002 • If the two windbreak walls with transition regions (i.e. walls 4 and 5) are compared, it is clearly
1003 visible that both tend to provide a uniform surface pressure distribution but there are certainly
1004 some differences between the two cases at different wind incidence angles.
- 1005 • Overall, the windbreak walls used in this study have proved to be capable in reducing the loads
1006 on a train surface significantly.

1007 The main motivation of this study was to obtain an understanding of the aerodynamic flow, which
1008 exists around a train surface due to the presence of different kinds of windbreak walls. This paper
1009 provides some interesting results, which can be used to provide an insight to future works where
1010 the ultimate aim of this study would be to provide safety and stability of trains. While it is
1011 acknowledged that in reality, there is a relative movement between the train and the windbreak
1012 walls, the aim of the current paper was not to calculate the aerodynamic forces and moment for a
1013 moving train in the transition region but to provide valuable experimental data for a stationary train
1014 in the transition region (with the use of a wind tunnel assessment), instead. The experimental data
1015 from the present work can help act as a benchmark for future work, which can involve performing
1016 numerical simulations to better understand the flow structures in order to form an enhanced
1017 understanding of the flow behaviour around trains with windbreak walls. Numerical simulations
1018 will be able to exhibit numerous flow features, which may not be evident through experimental
1019 results while the experimental results will be used to validate the initial numerical simulations. In
1020 addition, the flow around a high-speed train consists of several small structures due to the
1021 instabilities in the shear layers (Hemida and Krajnovic, 2010). The numerical simulations will help
1022 in studying the time-dependent behaviour of the flow structures and the resulting impact on the
1023 surface pressure of the train along with the aerodynamic coefficients. Numerical simulations will
1024 be able to easily assess the relative movement of the train with different windbreak walls along with
1025 providing further details of the flow around transition regions in windbreak walls. Also, different
1026 scenarios such as the use of a DTBR with the presence of symmetrical barriers in both, WWS and
1027 LWS are recommended for any follow up studies.

1028

1029 **Acknowledgements**

1030 The author(s) would like to thank the technical staff at the University of Birmingham's wind tunnel
1031 facility for their invaluable assistance provided throughout the experimental work in this project. The
1032 work was financed by a University of Birmingham funded scholarship and was supported by the EU
1033 H2020 project LiftTRAIN (701693).

1034

1035 **Declaration of Conflicting Interests**

1036 The author(s) declared no potential conflicts of interest with respect to the research, authorship, and/or
1037 publication of this article.

1038

1039 **5. References**

1040 Avila-Sanchez, S., Pindado, S., Lopez-Garcia, O. and Sanz-Andres, A., 2014. Wind Tunnel Analysis
1041 of the Aerodynamic Loads on Rolling Stock over Railway Embankments: The Effect of Shelter
1042 Windbreaks. *The Scientific World Journal*. 1-17.

1043 Avila-Sanchez, S., Lopez-Garcia, O., Cuerva, A., Meseguer, J., 2016. Characterisation of cross-flow
1044 above a railway bridge equipped with solid windbreaks. *Eng Struct*. 126, 133-146.

1045 Baker, C., 2010. The flow around high speed trains. *J. Wind Eng. Ind. Aerod*. 98, 277-298.

1046 Baker, C., 2014. A review of train aerodynamics Part 1 – Fundamentals. *The Aeronautical Journal*. 118
1047 (1201), 201-228.

1048 Baker, C., Brockie, N., 1991. Wind tunnel tests to obtain train aerodynamic drag coefficients: Reynolds
1049 number and ground simulation effects. *J. Wind Eng. Ind. Aerod*. 38, 23-28.

- 1050 Baker, C., Cheli, F., Orellano, A., Paradot, N., Proppe, C., Rocchi, D., 2009. Cross-wind effects on road
1051 and rail vehicles. *Vehicle System Dynamics*. 47 (8), 983-1022.
- 1052 Baker, C., Hemida H., Iwnicki, S., Xie, G., Ongaro, D., 2011. Special issue: The integration of
1053 crosswind forces into train dynamic modelling. *Proceedings of the Institution of Mechanical Engineers*.
1054 Part F J. Rail Rapid Transit. 225 (2), 154-164.
- 1055 Baker, C., Jones, J., Lopez-Calleja, F., Munday, J., 2004. Measurements of the crosswind forces on
1056 trains. *J. Wind Eng. Ind. Aerod.* 92, 547-563.
- 1057 Baker, C., Sterling, M., 2009. Aerodynamic Forces on Multiple Unit Trains in Cross Winds. *ASME. J.*
1058 *Fluids Eng.* 131 (10), 101103-101103-14.
- 1059 Barcala, M., Meseguer, J., 2007. An experimental study of the influence of parapets on the aerodynamic
1060 loads under cross wind on a two-dimensional model of a railway vehicle on a bridge. *Proceedings of*
1061 *the Institution of Mechanical Engineers*. Part F J. Rail Rapid Transit. 221 (4), 487-494.
- 1062 Bi, H., Ma, G., Wang, H., 2011. Aerodynamic characteristics of high-speed trains with wind fence. In:
1063 *The 3rd international conference on transportation engineering*. Chengdu, China. 2521–2526.
- 1064 Boccione, M., Cheli, F., Corradi, R., Muggiasca, S., Tomasini, G., 2008. Crosswind action on rail
1065 vehicles: wind tunnel experimental analyses. *J. Wind Eng. Ind. Aerod.* 96, 584-610.
- 1066 Browand, F., Ross, J., McCallen, R., 2009. *The Aerodynamics of Heavy Vehicles II: Trucks, Buses,*
1067 *and Trains*. Berlin.
- 1068 CEN, 2013. Railway applications - Aerodynamics - Part 4: Requirements and test procedures for
1069 aerodynamics on open track. BS EN 14067-4:2013. CEN/TC 256.
- 1070 CEN, 2018. Railway applications - Aerodynamics - Part 6: Requirements and test procedure for cross
1071 wind assessment. PrEN 14067–6 2009-02. CEN/TC 256.
- 1072 Cheli, F., Corradi, R., Rocchi, D., Tomasini, G., Maestrini, E., 2010. Wind tunnel tests on train scale
1073 models to investigate the effect of infrastructure scenario. *J. Wind Eng. Ind. Aerod.* 98, 353-362.
- 1074 Cheli, F., Rocchi, D., Schito, P., Tomasini, G., 2011. Steady and moving high-speed train crosswind
1075 simulations. Comparison with wind-tunnel tests. In: *Proceedings of the Ninth World Congress on*
1076 *Railway Research, WCRR 2011*. Lille, France.
- 1077 Chiu, T.W., Squire, L.C., 1992. An experimental study of the flow over a train in a crosswind at large
1078 yaw angles up to 90°. *J. Wind Eng. Ind. Aerod.* 45, 47-74.
- 1079 Chu, C., Chang, C., Huang, C., Wu, T., Wang, C., Liu, M., 2013. Windbreak protection for road vehicles
1080 against crosswind. *J. Wind Eng. Ind. Aerod.* 116, 61-69.
- 1081 Cooper, R., 1979. The probability of trains overturning in high winds. In: *Proceedings of the 5th*
1082 *International Conference on Wind Engineering*, Fort Collins. 2, 1185-1194.
- 1083 Copley, J., 1987. The three dimensional flow around railway trains. *J. Wind Eng. Ind. Aerod.* 26, 21-
1084 52.
- 1085 Deeg, P., Jonsson, M., Kaltenbach, H-J., Schober, M., Weise, M., 2008. Cross comparison of
1086 measurement techniques for the determination of train induced aerodynamic loads on the track bed. In:
1087 *Proceedings of the conference on Bluff Bodies Aerodynamics and its Applications*. Milano, Italy.
- 1088 Deng, E., Yang, W., Lei, M., Zhu, Z., & Zhang, P., 2019. Aerodynamic loads and traffic safety of high-
1089 speed trains when passing through two windproof facilities under crosswind: A comparative study.
1090 *Engineering Structures*, 188, 320-339.
- 1091 Department for Transport, 2017. Rail factsheet: 2017. National Statistics. Crown copyright.

- 1092 Diedrichs, B., 2003. On computational fluid dynamics modelling of crosswind effects for high-speed
 1093 rolling stock. *Proceedings of the Institution of Mechanical Engineers. Part F J. Rail Rapid Transit.* 217
 1094 (3), 203-226.
- 1095 Dorigatti, F., Sterling, M., Baker, C., Quinn, A., 2015. Crosswind effects on the stability of a model
 1096 passenger train - A comparison of static and moving experiments. *J. Wind Eng. Ind. Aerod.* 138, 36-
 1097 51.
- 1098 EC, 2008. TSI—technical specification for Interoperability of the trans-European high-speed rail
 1099 system, ‘rolling stock’ sub-system, TSI-HS2008/232/EC. *Off. J. Eur. Union.*
- 1100 Fujii, T., Maeda, T., Ishida, H., Imai, T., Tanemoto, K., Suzuki, M., 1999. Wind induced accidents of
 1101 train vehicles and their measurements in Japan. *Q.J. RTRI Japan.* 401, 50-55.
- 1102 Gallagher, M., Morden, J., Baker, C., Soper, D., Quinn, A., Hemida, H., Sterling, M., 2018. Trains in
 1103 crosswinds – comparison of full-scale on-train measurements, physical model tests and CFD
 1104 calculations. *J. Wind Eng. Ind. Aerod.* 175, 428-444.
- 1105 Guo, W., Xia, H., Karoumi, R., Zhang, T., Li, X., 2015. Aerodynamic effect of wind barriers and
 1106 running safety of trains on high-speed railway bridges under crosswinds. *J. Wind Struct.* 20 (2), 213-
 1107 236.
- 1108 He, X., Zou, Y. F., Wang, H. F., Han, Y., Shi, K., 2014. Aerodynamic characteristics of a trailing rail
 1109 vehicles on viaduct based on still wind tunnel experiments. *J. Wind Eng. Ind. Aerod.* 135, 22-33.
- 1110 Hemida, H., Baker, C., 2010. LES of the flow around a freight wagon subjected to crosswind. *Comput*
 1111 *Fluids.* 39 (10), 1944-1956.
- 1112 Hemida, H., Krajnovic, S., 2009. Exploring flow structure around a simplified ICE2 train subjected to
 1113 a 30 degrees side wind using LES. *Engineering Applications of Computational Fluid Mechanics.* 3, 28-
 1114 41.
- 1115 Hemida, H., Krajnovic, S., 2010. LES study of the influence of the nose shape and yaw angles on flow
 1116 structures around trains. *J. Wind Eng. Ind. Aerod.* 98, 34-46.
- 1117 Krajnović, S., Ringqvist, P., Nakade, K., & Basara, B., 2012. Large eddy simulation of the flow around
 1118 a simplified train moving through a crosswind flow. *Journal of Wind Engineering and Industrial*
 1119 *Aerodynamics,* 110, 86-99.
- 1120 Li, B., Xu, Z., Yang, Q., Feng, S., 2012. Effects of railway wind fence on the aerodynamic forces of
 1121 train and fence. In: *The 12th international symposium on structural engineering.* Wuhan, China. 625-
 1122 630.
- 1123 Liu, T., Chen, Z., Zhou, X., & Zhang, J., 2018. A CFD analysis of the aerodynamics of a high-speed
 1124 train passing through a windbreak transition under crosswind. *Engineering Applications of*
 1125 *Computational Fluid Mechanics,* 12(1), 137-151.
- 1126 Mohebbi, M., Rezvani, M., 2017. Two-dimensional analysis of the influence of windbreaks on airflow
 1127 over a high-speed train under crosswind using lattice Boltzmann method. *Proceedings of the Institution*
 1128 *of Mechanical Engineers. Part F J. Rail Rapid Transit.* 232(3), 863-872.
- 1129 Niu, J., Zhou, D., & Wang, Y., 2018. Numerical comparison of aerodynamic performance of stationary
 1130 and moving trains with or without windbreak wall under crosswind. *Journal of Wind Engineering and*
 1131 *Industrial Aerodynamics,* 182, 1-15.
- 1132 Premoli, A., Rocchi, D., Schito, P., & Tomasini, G. I. S. E. L. L. A., 2016. Comparison between steady
 1133 and moving railway vehicles subjected to crosswind by CFD analysis. *Journal of Wind Engineering*
 1134 *and Industrial Aerodynamics,* 156, 29-40.
- 1135 Richardson, G.M., Richards, P.J., 1995. Full-scale measurements of the effect of a porous windbreak
 1136 on wind spectra. *J. Wind Eng. Ind. Aerod.* 54-55, 611-619.

- 1137 RSSB, 2009. Resistance of Railway Vehicles to Roll-Over in Gales, Railway Group Standard GM/RT
1138 2142. Rail Safety and Standards Board Ltd.
- 1139 RSSB, 2016. Leading Health and Safety on Britain's Railway. Rail Safety and Standards Board Ltd.
- 1140 Sanquer, S., Barre, C., deVirel, M.D., Cleon, L.M., 2004. Effect of crosswinds on high-speed trains:
1141 development of a new experimental methodology. *J. Wind Eng. Ind. Aerodyn.* 92, 535–545.
- 1142 Schulte-Werning, B., Grégoire, R., Malfatti, A., Matschke, G., 2002. TRANSAERO - A European
1143 Initiative on Transient Aerodynamics for Railway System Optimisation. Springer. Berlin.
- 1144 Schulte-Werning, B., Matschke, G., 1997. Measures and strategies to minimise the effect of strong
1145 crosswinds on high speed trains, Proceedings of the WCRR World Congress of Railway Research,
1146 Florence, Italy. vol. E. 569–575.
- 1147 TFI, 2011. Turbulent Flow Instrumentation - Cobra Probe - Getting started guide. Technical report.
- 1148 Tomasini, G., Giappino, S., Cheli, F., Schito, P., 2015. Windbreaks for railway lines: Wind tunnel
1149 experimental tests. Proceedings of the Institution of Mechanical Engineers. Part F J. Rail Rapid Transit.
1150 230(4), 1270-1282.
- 1151 Yang, W., Deng, E., Lei, M., Zhu, Z., & Zhang, P., 2019. Transient aerodynamic performance of high-
1152 speed trains when passing through two windproof facilities under crosswinds: A comparative study.
1153 *Engineering Structures*, 188, 729-744.
- 1154 Zhang, T., Guo, W. and Du, F., 2017. Effect of windproof barrier on aerodynamic performance of
1155 vehicle-bridge system. *Procedia Engineering*. 199, 3083-3090.
- 1156 Zhang, T., Xia, H., Guo, W., 2013. Analysis on running safety of train on bridge with wind barriers
1157 subjected to cross wind. *J. Wind Struct.* 172, 203-225.
- 1158 Zhao, H., Zhai, W., and Chen, Z., 2015. Effect of noise barrier on aerodynamic performance of high-
1159 speed train in crosswind. *J. Wind Struct.* 202, 213-236.