

# Loraine – an interior-point solver for low-rank semidefinite programming

Habibi, Soodeh; Kocvara, Michal; Stingl, Michael

DOI:

[10.1080/10556788.2023.2250522](https://doi.org/10.1080/10556788.2023.2250522)

License:

Creative Commons: Attribution (CC BY)

*Document Version*

Publisher's PDF, also known as Version of record

*Citation for published version (Harvard):*

Habibi, S, Kocvara, M & Stingl, M 2023, 'Loraine – an interior-point solver for low-rank semidefinite programming', *Optimization Methods and Software*. <https://doi.org/10.1080/10556788.2023.2250522>

[Link to publication on Research at Birmingham portal](#)

## General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

## Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.



# Lorraine – an interior-point solver for low-rank semidefinite programming

Soodeh Habibi<sup>a</sup>, Michal Kočvara<sup>a,b</sup> and Michael Stingl<sup>c</sup>

<sup>a</sup>School of Mathematics, University of Birmingham, Birmingham, UK; <sup>b</sup>Institute of Information Theory and Automation, Prague, Czech Republic; <sup>c</sup>Applied Mathematics (Continuous Optimization), Friedrich-Alexander-Universität Erlangen-Nürnberg, Nurnberg, Germany

## ABSTRACT

The aim of this paper is to introduce a new code for the solution of large-and-sparse linear semidefinite programs (SDPs) with low-rank solutions or solutions with few outlying eigenvalues, and/or problems with low-rank data. We propose to use a preconditioned conjugate gradient method within an interior-point SDP algorithm and an efficient preconditioner fully utilizing the low-rank information. The efficiency is demonstrated by numerical experiments using the truss topology optimization problems, Lasserre relaxations of the MAXCUT problems and the sensor network localization problems.

## ARTICLE HISTORY

Received 20 December 2022  
Accepted 17 August 2023

## KEYWORDS

Semidefinite optimization; interior-point methods; preconditioned conjugate gradients; truss topology optimization; MAXCUT problem; Lasserre relaxations; sensor network localization

## AMS SUBJECT CLASSIFICATIONS

90C22; 90C51; 65F08; 74P05

## 1. Introduction

The first efficient solvers for semidefinite optimization emerged more than 20 years ago. All of the general-purpose solvers have been using second-order algorithms, predominantly the interior-point (IP) method. In every iteration of such an algorithm, one has to solve a system of linear equations  $Hx = g$  of size  $n \times n$ , where  $n$  is the dimension of the unknown vector  $x$  in the linear semidefinite programming (SDP) problem

$$\min_{x \in \mathbb{R}^n} c^\top x \quad \text{subject to} \quad \sum_{i=1}^n x_i A_i^{(k)} - B^{(k)} \succcurlyeq 0, \quad k = 1, \dots, p$$

with  $A_i^{(k)}, B^{(k)} \in \mathbb{R}^{m \times m}$ . The assembly and solution of this linear system is a well-known bottleneck of these solvers. This is the case even for problems with sparse data and sparse linear systems when the assembly of the system requires  $\mathcal{O}(pnm^3)$  flops, and the solution by sparse Cholesky factorization  $\mathcal{O}(n^\alpha)$  flops with some  $\alpha \in [1, 3]$ .

**CONTACT** Michal Kočvara  m.kocvara@bham.ac.uk  
Dedicated to the memory of Oleg Burdakov

© 2023 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.  
This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.  
The terms on which this article has been published allow the posting of the Accepted Manuscript in a repository by the author(s) or with their consent.

On the other hand, many real-world applications lead to large-scale SDP, often unsolvable by current general-purpose software. There are, essentially, three ways how to approach this conundrum:

- (1) Reformulating the problem to make it more suitable for general-purpose solvers. This can be done, for instance, by facial reduction [21,29,42] or by decomposition of large matrix inequalities (and thus reducing  $m$ ) into several smaller ones [18,19]
- (2) Using a different algorithm, such as spectral bundle [14], ADMM [28], augmented Lagrangian [25,41], optimization on manifolds [17], randomized algorithms [38] or techniques of nonlinear programming [8,9]
- (3) Using one of the second-order algorithms with Cholesky factorization replaced by an iterative method for the solution of the linear systems  $Hx = g$ ; see, e.g. [20,33,40].

The last approach is particularly attractive whenever  $n \gg m$  and addresses both bottlenecks of a second-order SDP solver.

- The assembling of the system matrix: an iterative solver only needs matrix-vector multiplications, and so the matrix does not have to be explicitly assembled and stored.
- The solution of the linear system itself: an iterative solver can handle very large systems, as compared to a sparse Cholesky solver, under the assumption of good conditioning of the matrix or existence of a good preconditioner.

When the data matrices  $A_i^{(k)}$  are of very low rank (such as rank one), the complexity of the linear system assembling can be substantially reduced by using this fact. This is particularly true for rank-1 dense matrices. This fact is, however, rarely utilized in standard SDP software, due to the complications related to a different data input.

Our goal in this paper is to introduce Loraine, a new general-purpose interior-point SDP solver targeted to problems with *low-rank data* and *low-rank solutions* or solutions with *few outlying eigenvalues*. It employs special treatment of low-rank data matrices and, in particular, an option to use an iterative Krylov type method for the solution of the linear system. As the choice of an efficient preconditioner in a Krylov type method is problem dependent, in particular, in the context of optimization algorithms. We will focus on problems with expected very low-rank solutions.

SDP problems with low-rank solutions are common in relaxations of optimization problems in different areas such as combinatorial optimization [4], approximation theory [10,22], control theory [22], structural optimization [31] and power systems [24].

It is *not* our goal to find a low-rank solution in case of non-unique solutions; indeed, it is well known that an interior-point method will converge to a maximal complementary solution. However, if the method will converge to a low-rank solution, we will use this fact to improve its computational complexity and memory demands. The preconditioner is not only limited to problems with (theoretically exactly) low-rank solutions, it can be efficiently applied when the solution has a few outlying eigenvalues.

There is one major difference to other algorithms for SDP problems with low-rank solutions, such as SDPLR [8,9], optimization on manifolds [17] and other approaches [3,38]. All these methods require the knowledge of a guaranteed (possibly tight) upper bound on the rank of the solution. If the estimate of the rank was lower than the actual rank,

the algorithm would not find a solution. In our approach, the rank information is merely used to speed up a standard, well-established algorithm. If our estimated rank is smaller than the actual one, we will only see it in possibly more iterations of the Krylov solver; the convergence behaviour of the optimization algorithm will be unchanged.

The actual optimization algorithm used in Loraine is a ‘standard’ primal–dual interior-point method. The algorithm mimics the reliable primal–dual algorithm with Nesterov–Todd direction, as used, e.g. in the SDPT3 solver [32,33].

Our preconditioner is motivated by the work of Zhang and Lavaei [40]. They present a preconditioner for the conjugate gradient method within a standard IP method that makes it more efficient for large-and-sparse low-rank SDPs. We partly follow their approach though there are some major differences: we abandon a crucial assumption on the sparsity of the data matrices (assumption 2 in [40]); our method allows for SDPs with more than one LMI and with (simple) linear constraints; the complexity of computing our preconditioner is substantially lower; we can also efficiently solve problems with a few outlying eigenvalues in the optimal solution.

To test Loraine and the underlying algorithms, we have generated a library of problems arising from truss topology optimization, sensor network localization and Lasserre relaxations of the MAXCUT problem. These problems are characterized by very low-rank solutions and scalability, in the sense that one can generate a range of problems of various dimensions but of the same type. By comparing Loraine with other SDP solvers, we will demonstrate the efficiency of our approach.

This paper is organized as follows. Section 2 introduces the SDP problems we want to solve and some basic assumptions. In Section 3, an IP method is briefly presented. Next, in Section 4, we introduce the preconditioners used with the iterative solvers. Section 5 presents the solver Loraine. Sections 6–8 describe our applications, truss topology optimization problems, the sensor network localization problem and Lasserre hierarchies of the MAXCUT problem. Finally, in Section 9, we present the results of our numerical experiments. We also give comparisons with other existing SDP software and demonstrate the high efficiency of our solver.

*Notation* We denote by  $\mathbb{S}^m$ ,  $\mathbb{S}_+^m$  and  $\mathbb{S}_{++}^m$ , respectively, the space of  $m \times m$  symmetric matrices, positive semidefinite and positive definite matrices. The eigenvalues of a given matrix  $X \in \mathbb{S}_{++}^m$  are ordered as  $\lambda_1(X) \leq \dots \leq \lambda_m(X)$ , and its condition number is defined as  $\kappa(X) = \lambda_m(X)/\lambda_1(X)$ . The notation ‘vec’ and ‘ $\otimes$ ’ refer to the (non-symmetrized) vectorization and Kronecker product, respectively, while ‘svec’ and ‘smat’ refer to symmetrized vectorization and its inverse operation. With this notation, the following identity holds true:  $\text{vec}(AXB^\top) = (A \otimes B)\text{vec}(X)$ . The symbol  $\bullet$  denotes the Frobenius inner product of two matrices,  $A \bullet B = \text{tr}(A^\top B)$ . Finally,  $e_i \in \mathbb{R}^n$  is a vector with one on the  $i$ th position and zeros otherwise.

## 2. Low-rank semidefinite optimization

While Loraine is a general-purpose SDP solver, its main feature is the ability to efficiently solve SDP problems with low-rank solutions. The first part of this paper is thus focused on this feature.

We consider a (primal) semidefinite optimization problem with matrix variables  $X_i \in \mathbb{S}^{m_i}$ ,  $i = 1, \dots, p$ , and with linear constraints

$$\begin{aligned} \min_{X_1, \dots, X_p, x_{\text{lin}}} \quad & \sum_{i=1}^p C_i \bullet X_i + d^\top x_{\text{lin}} \\ \text{subject to} \quad & \sum_{i=1}^p A_j^{(i)} \bullet X_i + (D^\top x_{\text{lin}})_j = b_j, \quad j = 1, \dots, n \\ & X \succcurlyeq 0, \quad x_{\text{lin}} \geq 0 \end{aligned} \tag{1}$$

together with its Lagrangian dual

$$\begin{aligned} \max_{y, S_1, \dots, S_p, s_{\text{lin}}} \quad & b^\top y \\ \text{subject to} \quad & \sum_{j=1}^n y_j A_j^{(i)} + S_i = C_i, \quad i = 1, \dots, p \\ & Dy + s_{\text{lin}} = d \\ & S_i \succcurlyeq 0, \quad i = 1, \dots, p \\ & s_{\text{lin}} \geq 0. \end{aligned} \tag{2}$$

Here  $A_j^{(i)} \in \mathbb{S}^{m_i}$ ,  $j = 1, \dots, n$ ,  $i = 1, \dots, p$ ,  $C_i \in \mathbb{S}^{m_i}$ ,  $i = 1, \dots, p$ ,  $b \in \mathbb{R}^n$ ,  $D \in \mathbb{R}^{v \times n}$ ,  $d \in \mathbb{R}^v$  are data of the problem.

### Basic assumptions

We make the following assumptions.

**Assumption 2.1:** *There exist strictly feasible  $X_i \in \mathbb{S}_{++}^{m_i}$ ,  $x_{\text{lin}} \in \mathbb{R}_{++}^v$ ,  $y \in \mathbb{R}^n$ ,  $S_i \in \mathbb{S}_{++}^{m_i}$ ,  $s_{\text{lin}} \in \mathbb{R}_{++}^v$ ,  $i = 1, \dots, p$  satisfying the equality constraints in (1) and (2) (Slater's condition).*

**Assumption 2.2:** *Define the matrices  $\mathbf{A}_i = [\text{vec} A_1^{(i)}, \dots, \text{vec} A_n^{(i)}]$ ,  $i = 1, \dots, p$ . We assume that matrix–vector products with  $\mathbf{A}_i$  and  $\mathbf{A}_i^\top$  may each be computed in  $\mathcal{O}(n)$  flops and memory.*

**Assumption 2.3:** *The inverse  $(D^\top D)^{-1}$  and matrix–vector product with  $(D^\top D)^{-1}$  may each be computed in  $\mathcal{O}(n)$  flops and memory.*

**Assumption 2.4:** *The dimensions of  $X_i$ ,  $i = 1, \dots, p$ , are much smaller than the number of constraints, i.e.  $m_i \ll n$ .*

**Remark 2.1:** Assumption 2.3 is satisfied, for instance, in case of box constraints on variable  $y$  in the dual formulation. Assumption 2.4 is not really needed as a ‘mathematical’ assumption, the iterative methods presented in this paper would work without it. However, the complexity of these methods would then be comparable with standard software using Cholesky factorization. The presented methods will be only superior to the standard software under this assumption.

### Low-rank assumption

As mentioned in Introduction, our approach is focused on linear systems with matrices having few large outlying eigenvalues. This, of course, includes matrices with very low rank but also matrices with ‘approximate’ low rank. These matrices frequently appear in optimization algorithms, such as interior-point methods, when the ‘exact’ low rank is only attained at the (unreached) optimum. Moreover, the approach allows us to solve problems with matrices of high rank but with a few large outlying eigenvalues, such as the problems in Section 7.

Because our approach covers SDP problems with (genuinely) low-rank solutions and for the lack of better terminology for the larger class of matrices with outlying eigenvalues, we still call our main assumption ‘low-rank’ and the problems we are targeting ‘SDP problems with low-rank solutions’.

Our main assumption used in the design of an efficient preconditioner concerns the eigenvalue distribution of the solution  $X^* = (X_1^*, \dots, X_p^*)$  of (1). We assume that  $X^*$  has a very small number of large outlying eigenvalues. This includes problems where  $X_i^*$  are of a very low rank.

**Assumption 2.5:** *Let  $X^*$  be the solution of (1) obtained, approximately, by the used interior point method. We assume that, for  $i = 1, \dots, p$ ,  $X_i^*$  has  $k$  outlying eigenvalues, i.e. that*

$$(0 \leq) \lambda_1(X_i^*) \leq \dots \leq \lambda_{m_i-k}(X_i^*) \ll \lambda_{m_i-k+1}(X_i^*) \leq \dots \leq \lambda_{m_i}(X_i^*),$$

where  $k$  is very small, typically smaller than 10 and, often, equal to 1.

**Remark 2.2:** The solution of the SDP problem (1) may not be unique. Hence, in Assumption 2.5 we speak about a solution the IP method is approaching. The IP algorithm is known to converge to a maximal complementary solution, i.e. a solution with the highest rank. While this may reduce the efficiency of the preconditioner in certain problem classes, we have not observed any difficulties related to this fact in the numerical experiment reported in Section 9.

**Remark 2.3:** To emphasize the difference between our algorithm and other ‘low-rank algorithms’, such as SDPLR [8] and the low-rank preconditioner introduced in [40] – that otherwise served as our motivation – we include the following remarks.

- (1) We do not assume anything about the distribution of the first  $(m_i - k)$  eigenvalues of  $X_i^*$ ; they may not be equal to zero, they may not be clustered.
- (2) We make no assumption about the ‘rank’ of the solution  $x_{\text{lin}}^*$  of (1), i.e. about the number of active constraints in  $Dy \leq d$  in (2). This can be arbitrarily large or small.
- (3) We do not assume that the matrix  $A^\top A$  is easily invertible. Indeed, it is *not* in our application in Section 6, contrary to examples in [40] where this matrix is diagonal.

### 3. Interior-point method

In this section, we will describe a primal–dual predictor–corrector interior-point method for SDP which is using the Nesterov–Todd (NT) direction, as implemented in Loraine. We

will closely follow the articles by Todd, Toh and Tütüncü [32] and by Toh and Kojima [34] and only repeat formulas needed to present the structure of the matrix that is required to develop the preconditioners in Section 4. The basic framework of our interior-point solver thus, more or less, mimics that of the software SDPT3.

We use the notation of problems (1) and (2); however, for the sake of simplicity, we ignore the linear constraints in the following development and consider only one matrix variable, i.e.  $p = 1$ . Linear constraints and several matrix variables can, of course, be formally included into a single linear matrix inequality.

### 3.1. Basic framework

Let  $\mathbf{A}$  be an  $m^2 \times n$  matrix defined by

$$\mathbf{A} := [\text{vec}A_1, \dots, \text{vec}A_n].$$

Our algorithm follows the standard steps of a primal–dual interior-point method. We write down optimality conditions for (1) with relaxed complementarity condition:

$$\begin{aligned} \mathbf{A}^\top \text{vec}(X) &= b, \\ \mathbf{A}y - S &= C, \\ XS &= \sigma \mu I, \end{aligned} \tag{3}$$

where  $\mu = \frac{X \bullet S}{m}$  and  $\sigma$  is a centring parameter to be specified below. This system of nonlinear equations is solved repeatedly until convergence.

### 3.2. Newton direction

The system (3) is solved approximately by Newton's method, where in every iteration of the method we solve the following system of linear equations in variables  $(\Delta X, \Delta y, \Delta S)$ :

$$\mathbf{A}^\top \text{vec}(\Delta X) = r_p, \tag{4a}$$

$$\mathbf{A}\Delta y + \text{vec}(\Delta S) = \text{vec}(R_d), \tag{4b}$$

$$H_P(X\Delta S + \Delta XS) = \sigma \mu I - H_P(XS). \tag{4c}$$

Here

$$r_p := b - \mathbf{A}^\top X, \quad R_d := C - S - \sum_{i=1}^n y_i A_i,$$

and  $H_P$  is a linear transformation guaranteeing symmetry of the resulting matrix, in particular

$$H_P(M) = \frac{1}{2} \left( PMP^{-1} + P^{-\top} M^\top P^\top \right)$$

with some invertible matrix  $P \in \mathbb{S}_{++}^m$  known as the *scaling matrix* [39]. By assuming  $(X, y, S)$  to be the current iterate, we define the so-called Nesterov–Todd (NT) scaling



matrix

$$P = W^{-\frac{1}{2}}, \quad W = S^{-\frac{1}{2}} \left( S^{\frac{1}{2}} X S^{\frac{1}{2}} \right)^{\frac{1}{2}} S^{-\frac{1}{2}} = X^{\frac{1}{2}} \left( X^{-\frac{1}{2}} S X^{-\frac{1}{2}} \right)^{\frac{1}{2}} X^{\frac{1}{2}}$$

satisfying  $X = WSW$  and  $S = WX^{-1}W$ . This is the scaling matrix used in Loraine.

Instead of solving the linear system of  $2m^2 + n$  Equations (4a)–(4c) directly, we can solve a Schur complement equation (SCE) involving only  $\Delta y$ . The general bottleneck of any interior-point method for SDP is assembling and solving this SCE

$$H\Delta y = r. \quad (5a)$$

Here  $H$  is the Schur complement matrix with elements

$$H_{ij} = A_i \bullet W A_j W, \quad i, j = 1, \dots, n, \quad (5b)$$

and

$$r = r_p + \mathbf{A}^\top \text{vec}(WR_d W + WSW). \quad (5c)$$

For details of computing  $W$ ,  $r$ ,  $\Delta X$  and  $\Delta S$  efficiently for the NT scaling, see [34].

By considering (5a) and (5b), we have the following linear system:

$$(H\Delta y)_i = A_i \bullet \left[ W \left( \sum_{j=1}^n \Delta y_j A_j \right) W \right] = r_i, \quad i = 1, \dots, n. \quad (6)$$

Finally, vectorizing the matrix variables allows (6) to be written as

$$\left( \mathbf{A}^\top (W \otimes W) \mathbf{A} \right) \Delta y = r. \quad (7)$$

#### 4. Preconditioners

As we mentioned before, the general bottleneck of the algorithm defined above is the assembling and solving of the Schur complement equation (7). One way to solve this equation is using an iterative method, in particular, a Krylov-type method such as the method of conjugate gradients (CG) or the minimum residual method (MINRES). To simplify the presentation, in the next sections we will only speak about the preconditioned CG method; however, Loraine offers a choice of either CG or MINRES. More in Section 9.

The Schur complement matrix  $H$  is large and the assembling of it may be expensive. Besides, and more importantly, it becomes increasingly ill-conditioned as the IP method makes progress toward the solution. So a successful CG-based solution of our linear systems must rely on an efficient preconditioner. In this section, we introduce two preconditioners implemented in Loraine and targeted pro-SDP problems with low-rank solutions.

#### 4.1. Rank of $H$

The Schur complement matrix  $H$  can be written as a sum

$$H = \sum_{i=1}^p H_{\text{lmi}}^i + H_{\text{lin}},$$

where  $H_{\text{lin}}$  is associated with linear constraints. Recall from (7) that each  $H_{\text{lmi}}^i$  is computed as

$$H_{\text{lmi}}^i = \mathbf{A}_i^\top (W_i \otimes W_i) \mathbf{A}_i, \quad (8)$$

where  $W_i$  is the NT scaling matrix.

In the next three Lemmata 4.1–4.3, we will omit the subscript, for simplicity, before returning to the full notation in Theorem 4.4. The next lemma shows that  $W$  has the same rank as  $X$ . So, as  $X$  is low-rank,  $W$  will be low-rank. Later in this section, we will use this low-rank property of  $W$  to present the preconditioners.

Let  $(X, S)$  be a pair of solutions to (1). By complementarity, we know that  $XS = 0$ , and  $\text{rank}(X) + \text{rank}(S) = k + \sigma \leq m$ . Assume  $k + \sigma = m$ , i.e. strict complementarity. From  $XS = 0$ ,  $X \succcurlyeq 0$ ,  $S \succeq 0$ , we know that  $X$  and  $S$  are simultaneously diagonalizable, i.e. there exists  $U$  such that  $X = U\Lambda_X U^\top$ ,  $S = U\Lambda_S U^\top$ , where  $\Lambda_X$  and  $\Lambda_S$  are the diagonal matrices of eigenvalues and  $U^\top U = I$ .

**Lemma 4.1:** *Let  $X, S$  be as above. Let  $W \in \mathbb{S}^m$  be any matrix such that  $X = WSW$ . Then  $\text{rank}(W) = \text{rank}(X)$ .*

**Proof:** Assume, without loss of generality, that eigenvalues of  $X$  and  $S$  are sorted such that  $\Lambda_X = \text{Diag}(\lambda_1, \dots, \lambda_k, 0, \dots, 0)$  and  $\Lambda_S = \text{Diag}(0, \dots, 0, \mu_1, \dots, \mu_{m-k})$ . Then  $X = WSW$  is equivalent to  $U\Lambda_X U^\top = WU\Lambda_S U^\top W$ , and so, as  $U^\top U = I$ ,  $\Lambda_X = U^\top WU\Lambda_S U^\top WU$ . Define  $Z = U^\top WU$ , so that  $\Lambda_X = Z^\top \Lambda_S Z$ . Because  $(\Lambda_X)_{i,i} = 0$  for  $i > k$ , it must hold that  $z_{:,i}^\top z_{:,i} = 0$ ,  $i > k$ , where  $z_{:,i}$  is the  $i$ th column of  $Z$ . As  $Z$  is positive semidefinite, it means that  $Z_{i,j} = 0$  for  $i, j > k$ , i.e. the leading  $k \times k$  submatrix of  $Z$  is a rank- $k$  non-zero matrix and the rest of the matrix is zero. Hence,  $\text{rank}(Z) = k$  and, as  $W = UZU^\top$ , so is the rank of  $W$ . ■

The proof of the next lemma is straightforward.

**Lemma 4.2:** *Let  $X \in \mathbb{S}^m$  such that  $\text{rank} X = k$ ,  $k \leq m$ . Then  $\text{rank}(X \otimes X) = k^2$ .*

**Lemma 4.3:** *Let  $Y \in \mathbb{S}^m$  such that  $\text{rank} Y = k$ ,  $k \leq m$ , and  $A \in \mathbb{R}^{n \times m}$ ,  $n < m$ . Then  $\text{rank}(AYA^\top) \leq k$ .*

**Proof:** Because  $\text{rank} Y = k$ , we have  $Y = \sum_{i=1}^k y^{(i)} (y^{(i)})^\top$  with some  $y^{(i)} \in \mathbb{R}^m$ ,  $i = 1, \dots, k$ . Hence  $AYA^\top = A(\sum_{i=1}^k y^{(i)} (y^{(i)})^\top) A^\top = \sum_{i=1}^k z^{(i)} (z^{(i)})^\top$  with  $z^{(i)} = Ay^{(i)}$ . Therefore  $\text{rank}(AYA^\top) = \text{rank} \sum_{i=1}^k z^{(i)} (z^{(i)})^\top \leq k$ . A strict inequality occurs, trivially, when  $n < k$ . It can also occur when  $z^{(i)}$ ,  $i = 1, \dots, k$ , are linearly dependent. ■

By combining the above results, we get the following theorem.

**Theorem 4.4:** Let, for some  $i \in \{1, \dots, p\}$ ,  $W_i$  be the scaling matrix from Section 3 and let  $\text{rank } W_i = k$ . Let further  $H_{\text{lim}}^i$  be defined as in (8). Then  $\text{rank } H_{\text{lim}}^i \leq k^2$ .

**Remark 4.1:** All results in this section have been presented under the assumption of the exact rank of the involved matrices. This is, of course, only the limit case in our algorithms. The actual matrices have outlying eigenvalues and converge to the low-rank matrices. The message of Theorem 4.4 remains the same, though: when  $W_i$  has  $k$  outlying eigenvalues, then  $H_{\text{lim}}^i$  will have at most  $k^2$  outlying eigenvalues. This is the fact on which we build the preconditioner.

## 4.2. $H_\alpha$ preconditioner

The preconditioner introduced in this section has been motivated by the work of Zhang and Lavaei [40] and, in its derivation, we partly follow their paper; however, the new preconditioner differs in a substantial detail, as explained below. Also, our assumption about the matrix  $W$  is weaker.

In Section 3, we introduced the scaling matrix  $W$ . This matrix becomes progressively ill-conditioned as the IP method approaches the solution. This ill-conditioning of  $W$  is a result of Lemma 4.1. Assuming that the solution matrices  $X_i^*$ ,  $i = 1, \dots, p$ , have ranks  $k_i$ , the rank of matrices  $W_i$  will also tend to  $k_i$ .

The main idea of the preconditioner is to utilize Assumption 2.5 and decompose matrices  $W_i$  accordingly to their expected rank as follows:

$$W_i = \underbrace{\begin{bmatrix} V_i^s & V_i^l \\ 0 & \tau_i I \end{bmatrix} \begin{bmatrix} V_i^s & V_i^l \end{bmatrix}^\top}_{W_i^0} + \underbrace{V_i^l (\Lambda_i^l - \tau_i I) (V_i^l)^\top}_{U_i U_i^\top} \quad (9)$$

with  $\tau_i$  satisfying  $\lambda_1(W_i) \leq \tau_i < \lambda_{m_i-k_i}(W_i)$ . Here  $U_i$  are  $m_i \times k_i$  matrices of full column rank.

Recall now the form of the Schur complement matrix for problem (1):

$$H = \sum_{i=1}^p \mathbf{A}_i^\top (W_i \otimes W_i) \mathbf{A}_i + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D, \quad (10)$$

in which  $X_{\text{lin}} = \text{diag}(x_{\text{lin}})$  and  $S_{\text{lin}} = \text{diag}(s_{\text{lin}})$ .

**Remark 4.2:** Formally, we could treat the linear constraints, if present, as matrix constraints with diagonal matrices and perform the above decomposition for these constraints, too. However, it is rather unlikely that the corresponding part of the solution, vector  $x_{\text{lin}}$  would be ‘low rank’, i.e. that only a very few of the linear constraints would be active. This fact could then ruin the whole idea. Here we propose to treat the linear constraints as ‘full rank’ and add the matrix  $D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D$  to the preconditioner as is. In two of our applications, truss topology optimization and sensor network localization, the linear constraints only consist of upper and lower bounds (in the dual formulation), hence the matrix  $D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D$  is diagonal and satisfies Assumption 2.3. In the third application, relaxation of the MAXCUT problem, the matrix  $D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D$  is chordal and sparse ([13, Lemma 2.4]), so sparse Cholesky factorization leads to zero fill-in and is thus very efficient.

By substituting the splittings (9) for  $i = 1, \dots, p$  into the matrix (10), we get

$$H = \sum_{i=1}^p \mathbf{A}_i^\top \left( W_i^0 \otimes W_i^0 + U_i U_i^\top \otimes W_i^0 + W_i^0 \otimes U_i U_i^\top + U_i U_i^\top \otimes U_i U_i^\top \right) \mathbf{A}_i \\ + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D.$$

Using the identity  $\mathbf{A}^\top (\Phi \otimes \Xi) \mathbf{A} = \mathbf{A}^\top (\Xi \otimes \Phi) \mathbf{A}$  for any  $\Phi, \Xi \in \mathbb{R}^{m_i \times m_i}$  with  $\mathbf{A}$  defined as above ([40, Lemma 6] and [15, Chap. 4.2, Problem 25]), we obtain

$$H = \sum_{i=1}^p \mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i + \sum_{i=1}^p \mathbf{A}_i^\top (U_i \otimes \Gamma_i) (U_i \otimes \Gamma_i)^\top \mathbf{A}_i + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D,$$

where  $\Gamma_i$  is any matrix satisfying  $\Gamma_i \Gamma_i^\top = 2W_i^0 + U_i U_i^\top$ . We next define

$$V_i = \mathbf{A}_i^\top (U_i \otimes \Gamma_i), \quad i = 1, \dots, p, \quad \text{and} \quad \tilde{V} = [V_1, \dots, V_p]. \quad (11)$$

Then,

$$H = \sum_{i=1}^p \mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D + \tilde{V} \tilde{V}^\top. \quad (12)$$

We now approximate  $\mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i$  by  $\tau_i^2 I$  in (12), to define the  $H_\alpha$  preconditioner, which is

$$H_\alpha = \underbrace{\left( \sum_{i=1}^p \tau_i^2 I + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D \right)}_{\mathbf{A}_\alpha} + \tilde{V} \tilde{V}^\top. \quad (13)$$

By using the Sherman–Morrison–Woodbury (SMW) formula, its inverse will be

$$H_\alpha^{-1} = \mathbf{A}_\alpha^{-1} (I - \tilde{V} \Theta^{-1} \tilde{V}^\top \mathbf{A}_\alpha^{-1}), \quad (14)$$

where

$$\Theta = I + \tilde{V}^\top \mathbf{A}_\alpha^{-1} \tilde{V}. \quad (15)$$

As the matrix  $\mathbf{A}_\alpha$  is a sum of a diagonal matrix and a ‘scaled’ matrix  $D^\top D$ , the computation of its inverse is inexpensive, according to Assumption 2.3.

### Complexity of the PCG

- We compute the Schur complement

$$\Theta = I + [\mathbf{A}_1^\top (U_1 \otimes \Gamma_1) \dots \mathbf{A}_p^\top (U_p \otimes \Gamma_p)]^\top \mathbf{A}_\alpha^{-1} [\mathbf{A}_1^\top (U_1 \otimes \Gamma_1) \dots \mathbf{A}_p^\top (U_p \otimes \Gamma_p)],$$

block-wise, with the  $(i, j)$ -block  $\Theta_{ij} = B_i^\top B_j$ , where  $B_i = R^{-1} \mathbf{A}_i^\top (U_i \otimes \Gamma_i)$ ,  $i = 1, \dots, p$ , and  $R$  is the Cholesky factor of  $\mathbf{A}_\alpha$ . Then we multiply  $(C_i =) R^{-1} \mathbf{A}_i^\top$ , which is  $\mathcal{O}(n)$  flops. The sparsity of  $\mathbf{A}_i$  is maintained in  $C_i$ , and so  $C_i d$  is still  $\mathcal{O}(n)$  flops for an arbitrary vector  $d$ . Hence, as  $(U_i \otimes \Gamma_i)$  has  $m_i k_i$  columns, the product  $C_i (U_i \otimes \Gamma_i)$  requires  $\mathcal{O}(n m_i k_i)$  flops. Finally, we compute  $B_i^\top B_j$ , which requires  $\mathcal{O}(m_i m_j k_i k_j)$  flops, if  $B_i$  and

**Algorithm 1** Solution of the linear system  $H\Delta y = r$  by PCG


Given data  $k > 0$  (solution rank),  $W_i \in \mathbb{S}_{++}^m$ ,  $i = 1, \dots, p$ ,  $r \in \mathbb{R}^n$  (right-hand side) and an initial iterate  $\Delta y^0$ .

- 1: **procedure** SETTING UP PRECONDITIONER  $H_\alpha$
- 2:   **for**  $i = 1, \dots, p$  **do** ▷ computing the decomposition (12)
- 3:     Compute  $V_i$  by (11).
- 4:     Compute eigenvalue decomposition  $W_i = V_i \Lambda_i V_i^\top$  and set  $\tau_i = \lambda_{\min}(W_i)$ .
- 5:     Form the matrices  $W_i^0$  and  $U_i$  by (9).
- 6:     Compute the Cholesky factorization  $\Gamma_i \Gamma_i^\top = 2W_i^0 + U_i U_i^\top$ .
- 7:   **end for**
- 8:   Set up  $\tilde{V}$  by (11).
- 9:   Compute the matrix  $\Theta$  from (15) and its Cholesky factorization  $\Theta = LL^\top$ .
- 10: **end procedure**
- 11: **procedure** PCG
- 12:   Use standard PCG algorithm to solve  $H\Delta y = r$  until  $\|H\Delta y - r\|/\|r\| \leq \varepsilon_{\text{CG}}$ .
- 13:   At each PCG iteration:
  - 12:    Compute the matrix-vector product with  $H$  using (6).
  - 13:    Compute the matrix-vector product with  $H_\alpha^{-1}$  by means of the SMW in (14), using  $\Theta^{-1} = L^{-\top} L^{-1}$  with  $L$  pre-computed in Step 9.
- 14: **end procedure**

$B_j$  are sparse as well. If this is not the case, the complexity would be  $\mathcal{O}(m_i m_j k_i k_j n)$ , however, the additional factor  $n$  in the complexity formula can be avoided by reordering calculations appropriately. Define  $\hat{m} = \max_{i=1, \dots, p} m_i$  and  $\hat{k} = \max_{i=1, \dots, p} k_i$ . Forming and factorizing the Schur complement (i.e. forming the preconditioner) requires  $\mathcal{O}(p^2 \hat{m}^2 \hat{k}^2 + p n \hat{m} \hat{k} + \hat{m}^3 \hat{k}^3)$  flops; the last term comes from the Cholesky factorization of  $\Theta$ .

- Each iteration of the PCG method is dominated by the matrix-matrix product in (6) requiring  $\mathcal{O}(\sum_{i=1}^p m_i^3)$  flops and application of the preconditioner (14) requiring  $\mathcal{O}(\sum_{i=1}^p m_i k_i)^2 + \mathcal{O}(n \sum_{i=1}^p m_i k_i)$  flops.
- The number of PCG iterations is a little unpredictable, in particular, when approaching the solution of the problem. However, our experience shows that this number is usually well below 10 and does not exceed 100 in the worst problems. Dropping the lower-order terms and assuming  $n \approx \hat{m}^2$ , we will need  $\mathcal{O}(\hat{m}^3 \hat{k}^3)$  flops in the preconditioner and  $\mathcal{O}(\hat{m}^3 \hat{k})$  flops in one PCG iteration. We come to the conclusion that the cost of the preconditioner is about the same as the cost of the solution of the linear system by the PCG method.

**Example 4.5:** The efficiency of the  $H_\alpha$  preconditioner is demonstrated in Figure 1. The graph on the left-hand side shows the history of the condition number of matrices  $H$  and  $H_\alpha^{-1}H$  during Loraine iterations. Here  $\kappa(H)$  is shown in *logarithmic scale* in blue and  $\kappa(H_\alpha^{-1}H)$  in *linear scale* in red. The graph on the right-hand side shows the distribution of eigenvalues of  $H$  and  $H_\alpha^{-1}H$  in the last iteration; again,  $\lambda(H)$  in *logarithmic scale* in blue

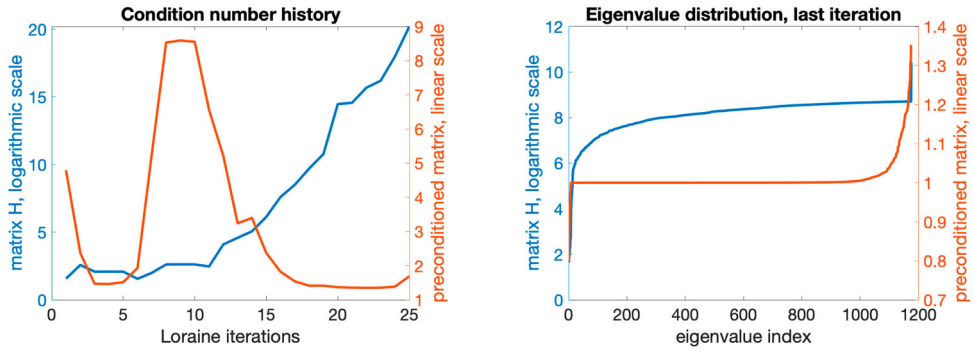

**Figure 1.** Problem tru7; left: condition number history of  $H$  (left y-axis in logarithmic scale; blue graph)) and of  $H_\alpha^{-1}H$  (right y-axis in linear scale; red graph); right: eigenvalue distribution of  $H$  (left y-axis in logarithmic scale; blue graph)) and of  $H_\alpha^{-1}H$  (right y-axis in linear scale; red graph)) in the last iteration.

and  $\lambda(H_\alpha^{-1}H)$  in *linear scale* in red. The data were obtained by solving problem tru7 introduced in Section 9.

#### 4.3. $H_\beta$ and hybrid preconditioner


Recall the definition of the matrix  $H$ :

$$H = \sum_{i=1}^p \mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i + \tilde{V} \tilde{V}^\top + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D.$$

It turns out that, in our numerical examples, the last term is dominating in the first iterations of the IP algorithm, before the low-rank structure of  $W$  is clearly recognized. This is demonstrated in Figure 2 that shows the distribution of eigenvalues of matrices  $D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D$  (in red) and  $\sum_{i=1}^p \mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i + \tilde{V} \tilde{V}^\top$  (in blue) in iterations 3, 13, 27 (final) in problem tru7e (see Section 9).

This observation leads to the idea of a simplified preconditioner called  $H_\beta$  and defined as follows:

$$H_\beta = \sum_{i=1}^p \tau_i^2 I + D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D, \quad (16)$$

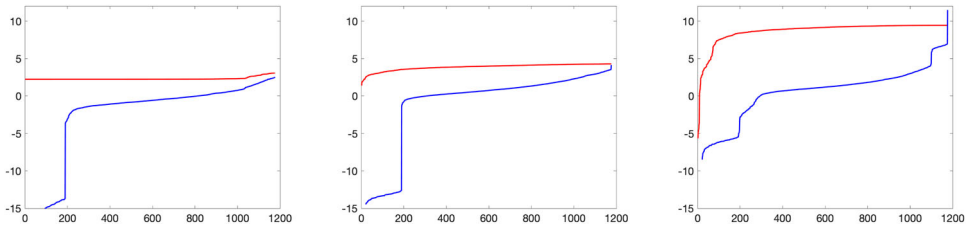

**Figure 2.** Problem tru7e; eigenvalues of  $D^\top X_{\text{lin}} S_{\text{lin}}^{-1} D$  (red) and  $\sum_{i=1}^p \mathbf{A}_i^\top (W_i^0 \otimes W_i^0) \mathbf{A}_i + \tilde{V} \tilde{V}^\top$  (blue) in iterations 3, 13 and 27 (left to right).

in which  $\tau_i$  is defined as in the previous section. This matrix is easy to invert by Assumption 2.3; in fact, the matrix is diagonal in many problems. It is therefore an extremely ‘cheap’ preconditioner that is efficient in the first iterations of the IP algorithm.

For relevant problems, we therefore recommend to use a *hybrid preconditioner*: we start the IP iterations with  $H_\beta$  and, once it becomes inefficient, switch to the more expensive but more efficient  $H_\alpha$ . See more details in Section 9.3 and an example in Section 9.5.2.

## 5. The code Loraine

Algorithms presented in the previous sections have been implemented in a code Loraine (for LOW-RAnk INtErior point). The implementation was done in MATLAB and Julia programming environments and is available as open source .<sup>1</sup>

### 5.1. Special features

Loraine is a general-purpose solver for any linear SDP with linear equality and inequality constraints. Compared to other general-purpose SDP software, it particularly targets two classes of problems.

#### Problems with low-rank solutions

Loraine is using the preconditioned conjugate gradient method, as described in detail in Section 4. In particular, the user can choose between the direct and iterative solver, the type of preconditioner and the expected rank of the solution. The direct solver relies on the implementation of the (sparse or dense) Cholesky factorization provided by MATLAB or Julia.

#### Problems with low-rank data input

This feature is only useful when a direct solver is used. In this case, the bottleneck of an interior-point algorithm is the computation of the Schur complement matrix in (5b) and (7). When the data matrices  $A_i$  are of low rank (typically of rank one), the complexity of (5b) can be drastically reduced. The user has a choice

- to provide vectors  $(a_i^j)_k$ ,  $k = 1, \dots, r$ , defining matrices  $A_j^{(i)} = \sum_{k=1}^r (a_i^j)_k (a_i^j)_k^\top$  (field `Avec` in the Data input section below);
- to indicate that the input matrices  $A_j^{(i)}$  are all expected to be of rank one. Then their decomposition to a vector-vector product can be automatically computed by Loraine.

### 5.2. Data input

The notation in the input file is related to the dual formulation of the problem (2) without slack variables. The input for the MATLAB version of Loraine is a MATLAB structure with the following fields:

**type** ... ‘sdp’ [field used for future extensions]  
**name** ... ‘name of the problem’  
**nvar** ... number of variables  $n$

**c** ...objective vector  $b$   
**nlmi** ...number of linear matrix inequalities  $p$   
**msizes** ...dimensions of the LMIs  $m_1, \dots, m_p$   
**nlin** ...number of linear constraints  $\nu$   
**lsi\_op** ... (optional) binary vector of length  $nlin$ , set to zero for equality constraints and one for inequality constraints; if this vector is not present and  $\nu > 0$ , inequality type constraints are assumed.  
**A** ...matrices  $A_j^{(i)}$  stored in MATLAB sparse format as cells  $A{i}, j$   
**Avec** ...vectors  $(a_i^j)_k, k = 1, \dots, r$ , defining matrices  $A_j^{(i)} = \sum_{k=1}^r (a_i^j)_k (a_i^j)_k^\top$   
**C** ...matrix  $C$  of linear constraints  
**d** ...vector  $d$  of linear constraints

We also provide several converters, e.g. from SDPA input files. For the Julia version of Loraine, the MATLAB structure can be exported and read by the Julia code.

### 5.3. Loraine options

The following parameters can be changed by the user:

```
kit = 1;          % 0..direct solver; 1..iterative solver
tol_cg = 1e-2;    % initial tolerance for iterative solver
tol_cg_up = 0.5;  % tolerance update
tol_cg_min = 1e-6; % minimal tolerance for CG solver
cg_type = 'minres'; % 'minres' or 'cg' implemented
eDIMACS = 1e-6;   % epsilon for DIMACS error stopping criterion
prec = 1;         % 0..no; 1..H_alpha; 2..H_beta; 4..hybrid
erank = 1;        % estimated rank of the solution
mup = 1000;       % initial penalty parameter mu for l1-penalization
verb = 2;         % 2..full output, 1..short output, 0..no output
datarank = 0;     % -1..A_i expected rank one; 0..full rank; 1..A_i by vectors
initpoint = 0;    % 0..Loraine heuristics, 1..SDPT3-like heuristics
```

## 6. Application 1: Truss topology optimization

### 6.1. Truss notation

*The notation used throughout Section 6 is specific to this application and unrelated to the rest of this paper.*

By truss, we understand a mechanical structure, an assemblage of pin-jointed uniform straight bars made of elastic material, such as steel or aluminium. The bars can only carry axial tension and compression. We denote by  $m$  the number of bars and by  $N$  the number of joints. The positions of the joints are collected in a vector  $y$  of dimension  $\tilde{n} := \dim \cdot N$  where  $\dim$  is the spatial dimension of the truss. The material properties of bars are characterized by their Young's moduli  $E_i$ , the bar lengths are denoted by  $\ell_i$  and bar volumes by  $t_i, i = 1, \dots, m$ .

Let  $f \in \mathbb{R}^{\tilde{n}}$  be a load vector of nodal forces. The response of the truss to the load  $f$  is measured by nodal displacements collected in a displacement vector  $u \in \mathbb{R}^{\tilde{n}}$ . Some of the



displacement components may be restricted: a node can be fixed in a wall, then the corresponding displacements are prescribed to be zero. The number of free nodes multiplied by the spatial dimension will be denoted by  $n$  and we will assume that  $f \in \mathbb{R}^n$  and  $u \in \mathbb{R}^n$ .

We introduce the bar stiffness matrices  $K_i$  and assemble them in the global stiffness matrix of the truss

$$K(t) = \sum_{i=1}^m t_i K_i = \sum_{i=1}^m t_i \frac{E_i}{\ell_i^2} \delta_i \delta_i^\top, \quad i = 1, \dots, m \quad (17)$$

with ‘position vectors’  $\delta_i \in \mathbb{R}^n$ ,  $i = 1, \dots, m$ , and Young’s moduli  $E_i \in \mathbb{R}$ ,  $i = 1, \dots, m$ , characterizing the stiffness of the material. The truss must satisfy the equilibrium equation

$$K(t)u = f. \quad (18)$$

**Assumption 6.1:**  $K(\mathbf{1})$  with  $\mathbf{1} = (1, 1, \dots, 1) \in \mathbb{R}^m$  is positive definite and the load vector  $f$  is in the range space of  $K(\mathbf{1})$ .

## 6.2. Truss topology problem, rank of the solution

Let  $0 \leq \underline{t}_i \leq \bar{t}_i$ ,  $i = 1, \dots, m$ , and  $\gamma$  be a positive constant. The basic ‘minimum volume’ truss topology optimization (TTO) problem reads as follows:

$$\begin{aligned} \min_{t \in \mathbb{R}^m} \quad & \sum_{i=1}^m t_i \\ \text{subject to} \quad & \begin{pmatrix} \gamma & -f^\top \\ -f & K(t) \end{pmatrix} \succcurlyeq 0 \\ & \underline{t}_i \leq t_i \leq \bar{t}_i, \quad i = 1, \dots, m. \end{aligned} \quad (19)$$

The dual to (19) can be written as

$$\begin{aligned} \max_{\substack{X \in \mathbb{S}^{n+1} \\ \bar{\rho} \in \mathbb{R}^m, \underline{\rho} \in \mathbb{R}^m}} \quad & \begin{pmatrix} -\gamma & f^\top \\ f & 0 \end{pmatrix} \bullet X - \sum_{i=1}^m \bar{\rho}_i \bar{t}_i + \sum_{i=1}^m \underline{\rho}_i \underline{t}_i \\ \text{subject to} \quad & \begin{pmatrix} 0 & 0 \\ 0 & K_i \end{pmatrix} \bullet X - \bar{\rho}_i + \underline{\rho}_i = 1, \quad i = 1, \dots, m \\ & X \succcurlyeq 0 \\ & \bar{\rho}_i \geq 0, \underline{\rho}_i \geq 0, \quad i = 1, \dots, m. \end{aligned} \quad (20)$$

**Lemma 6.1:** Problems (19), (20) satisfy Assumptions 2.2 and 2.3.

**Proof:** Every vector  $\delta_i$  has at most 4 non-zero elements (6 in 3D space) and thus every matrix  $K_i$  has at most 16 (36) non-zero elements, independently of the size of the problem;

**Table 1.** Eigenvalues of  $X^*$  and  $S^*$  for problem in Example 6.3.

| $\lambda(X^*), \underline{t} > 0$ | $\lambda(S^*), \underline{t} > 0$ | $\lambda(X^*), \underline{t} = 0$ | $\lambda(S^*), \underline{t} = 0$ |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| 1.980482521248879                 | 0.000000000000102                 | 2.064483254260574                 | 0.000000000010001                 |
| 0.000000102260913                 | 0.000003116874928                 | 0.010238711360358                 | 0.000000000013521                 |
| 0.000000086085241                 | 0.000003956920433                 | 0.009214785863400                 | 0.000000000013687                 |
| 0.000000068216515                 | 0.000006409263345                 | 0.005367091514209                 | 0.000000000016235                 |
| 0.000000054110869                 | 0.000007529457678                 | 0.005013654697043                 | 0.000000000017372                 |
| 0.000000042818584                 | 0.000009477992158                 | 0.003545367975067                 | 0.000000000018683                 |
| 0.000000039334355                 | 0.000011708852890                 | 0.002923233469802                 | 0.000000000020485                 |
| 0.000000033270286                 | 0.000012193659241                 | 0.002610639717586                 | 0.000000000021874                 |
| 0.000000032811718                 | 0.000014115281046                 | 0.001846306250799                 | 0.000000000024806                 |
| 0.000000028005339                 | 0.000014761068984                 | 0.001771660792931                 | 0.000000000028448                 |
| 0.000000027431494                 | 0.000016565957597                 | 0.001555022631457                 | 0.000000000032822                 |
| 0.000000000001029                 | 0.399999306252456                 | 0.000000000000031                 | 0.400000000006957                 |
| 0.000000000000041                 | 10.10000007997102                 | 0.000000000000001                 | 10.10000000001012                 |

hence Assumption 2.2 is satisfied. Assumption 2.3 is trivially satisfied for box constraints on  $\underline{t}_i$ . ■

Using SDP complementarity, it is straightforward to prove the following result.

**Theorem 6.2:** *There exists a solution  $(X^*, \bar{\rho}^*, \rho^*) \in \mathbb{S}^{n+1} \times \mathbb{R}^m \times \mathbb{R}^m$  of the dual SDP problem (20) such that the rank of  $X^*$  is one. For  $\underline{t}_i > 0$  this solution is unique.*

The above theorem is useful when  $X^*$  is unique (i.e. for  $\underline{t}_i > 0$ ); not as much when  $\underline{t}_i = 0$  and  $X^*$  may not be unique. In this case, some ‘other’ solutions may be of higher rank and an interior point algorithm will converge to them. This is demonstrated in the following example, with results obtained by Loraine.

Nevertheless, it can be shown that even in this case, every solution  $X^*$  will have one outlying eigenvalue and thus the problem satisfied Loraine assumptions. This is demonstrated by the numerical examples in the last section.

**Example 6.3:** Consider a truss with nine nodes, three nodes of them fixed by boundary conditions; for  $\underline{t}_i = 0$ , due to the setting of the problem, the solution of the dual problem may have rank of up to 11. Table 1 presents, column-wise, eigenvalues of  $X^*$  and  $S^*$  for  $\underline{t} > 0$  (when rank-one solution  $X^*$  is expected) and eigenvalues of  $X^*$  and  $S^*$  for  $\underline{t} = 0$  (when one outlying eigenvalue of  $X^*$  is expected).

### 6.3. Truss topology problem, vibration constraints

The formulation of the basic truss topology problem as an SDP is rather academic. It was shown, e.g. in [16] that it is equivalent to a convex nonlinear programming problem that can be solved very efficiently by interior point methods. The SDP formulation gains significance once we add more, important and practical, constraints to the problem. In particular, it was shown in [1,2] that a constraint on natural (free) vibrations of the optimal structure leads to a linear matrix inequality and that this is, arguably, the best way how to treat this constraint.

The free vibrations are the squares of the eigenvalues of the generalized eigenvalue problem

$$K(t)w = \lambda (M(t) + M_0) w, \quad (21)$$

where  $M(t) = \sum_{i=1}^m t_i M_i$  is the so-called mass matrix that collects information about the mass distribution in the truss. The matrices  $M_i$  are positive semidefinite and have the same sparsity structure as  $K_i$ . The non-structural mass matrix  $M_0$  is a constant, typically diagonal matrix with very few nonzero elements.

Low vibrations are dangerous and may lead to structural collapse, hence a typical vibration constraint is  $\lambda_{\min} \geq \bar{\lambda}$  for a given  $\bar{\lambda} > 0$  where  $\lambda_{\min}$  is the smallest eigenvalue of problem (21). This constraint can be equivalently written as a linear matrix inequality  $K(t) - \bar{\lambda}(M(t) + M_0) \succcurlyeq 0$ . We will thus get the following SDP formulation of the truss topology design with a vibration constraint:

$$\begin{aligned} & \min_{t \in \mathbb{R}^m} \sum_{i=1}^m t_i \\ & \text{subject to} \\ & \begin{pmatrix} \gamma & -f^\top \\ -f & K(t) \end{pmatrix} \succcurlyeq 0 \\ & K(t) - \bar{\lambda} (M(t) + M_0) \succcurlyeq 0 \\ & \underline{t}_i \leq t_i \leq \bar{t}_i, \quad i = 1, \dots, m. \end{aligned} \quad (22)$$

It has been shown, e.g. in [31] that, when  $\underline{t}_i > 0$ , the rank of the optimal dual variable to the second matrix inequality is equal to the multiplicity of the smallest eigenvalue of (21). This multiplicity depends on the geometry of the optimal structure but is, typically, very low, usually not bigger than 1 or 2. Problem (22) thus fits in our framework of SDPs with very low-rank solutions.


## 7. Application 2: sensor network localization with noisy data

### 7.1. The problem

Assume there are  $m$  distinct (sensor) points in  $x_i \in \mathbb{R}^d$ , whose locations are to be determined, and  $\nu$  other fixed (anchor) points, whose locations  $a_1, \dots, a_\nu$  are known. The Euclidean distance  $\delta_{ij}$  between the  $i$ th and  $j$ th sensor points is known if  $(i, j) \in \mathcal{I}_x = \{(i, j) \mid \|x_i - x_j\| = \delta_{ij} \leq \rho\}$ , where  $\rho$  is a fixed parameter called the radio range. Similarly, the Euclidean distance  $\delta_{kj}$  between the  $k$ th anchor and  $j$ th sensor point is known if  $(k, j) \in \mathcal{I}_a = \{(k, j) \mid \|a_k - x_j\| = \delta_{kj} \leq \rho\}$ . The *sensor network localization* (SNL) problem is to

$$\begin{aligned} & \text{Find } x_i \in \mathbb{R}^d, \quad i = 1, \dots, m, \text{ for which} \\ & \|x_i - x_j\|^2 = \delta_{ij}^2, \quad (i, j) \in \mathcal{I}_x \\ & \|a_k - x_j\|^2 = \delta_{kj}^2, \quad (k, j) \in \mathcal{I}_a. \end{aligned} \quad (23)$$

Typical networks of this type consist of a large number of densely deployed sensor nodes which gather local data and communicate with other nearby nodes. The sensor data

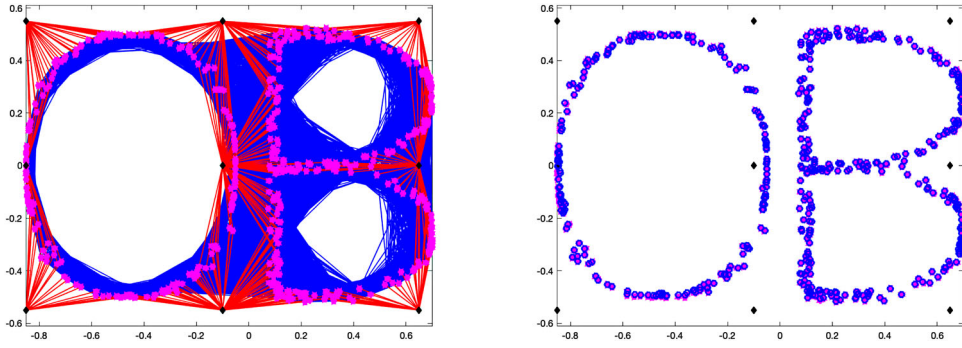

**Figure 3.** Sensor network localization problem: initial data (left) and optimal solution of the SDP relaxation (right). Black: anchors; magenta: exact positions of sensors; red (left): known distances between anchors and sensors; blue (left): known mutual distances of sensors; blue (right): computed positions of sensors.

from the nodes are relevant only if we know to what location they refer. The problem arises in applications as different as the habitat monitoring system in the Great Duck Island, detecting volcano eruptions, industrial control in semiconductor manufacturing plants, structural health monitoring, battlefield surveillance, moving object tracking, asset location and the problem of determining protein molecule structure [6].

Figure 3(left) shows an example of a network with 9 anchors and 512 sensors.

In many applications the data  $\delta_{ij}$  are noisy. Assume perturbation of  $\delta_{ij}$  and  $\bar{\delta}_{ik}$  by random noises  $\varepsilon_{ij}$  and  $\varepsilon_{ik}$ , respectively:

$$\begin{aligned}\delta_{ij} &= \hat{\delta}_{ij}|1 + \varepsilon_{ij}|, & (i, j) \in \mathcal{I}_x \\ \bar{\delta}_{ik} &= \hat{\bar{\delta}}_{ik}|1 + \varepsilon_{ik}|, & (i, j) \in \mathcal{I}_a\end{aligned}$$

where  $\hat{\delta}_{ij}$  are the true distances. Obviously, the problem (23) may now become infeasible.

## 7.2. SDP relaxation

In a series of papers, Biswas et al. [5,6,35] proposed a relaxation of the problem based on the semidefinite programming formulation. The next lines follow the development from Biswas and Ye [5].

Let  $X = [x_1 \ x_2 \ \dots \ x_m]$  be a  $d \times m$  unknown matrix. Then

$$\begin{aligned}\|x_i - x_j\|^2 &= (e_i - e_j)^T X^T X (e_i - e_j) \\ \|a_k - x_j\|^2 &= (a_k; -e_j)^T \begin{bmatrix} I_d \\ X^T \end{bmatrix} [I_d \ X] (a_k; -e_j)\end{aligned}$$

and the original problem (23) can be equivalently written as

$$\begin{aligned}
 &\text{Find } x_i \in \mathbb{R}^d, \ i = 1, \dots, m, \text{ for which} \\
 &(e_i - e_j)^T X^T X (e_i - e_j) = \delta_{ij}^2 \\
 &(a_k; -e_j)^T \begin{pmatrix} I_d & X \\ X^T & Y \end{pmatrix} (a_k; -e_j) = \bar{\delta}_{kj}^2 \\
 &Y = X^T X.
 \end{aligned} \tag{24}$$

We now relax the equality  $Y = X^T X$  to  $Y \succcurlyeq X^T X$ , which is equivalent to the linear matrix inequality

$$Z = \begin{pmatrix} I_d & X \\ X^T & Y \end{pmatrix} \succcurlyeq 0.$$

The semidefinite optimization problem

$$\begin{aligned}
 &\min_{Z, u, v} \quad \sum_{(i,j) \in \mathcal{I}_x} (u_{ij} + v_{ij}) + \sum_{(k,j) \in \mathcal{I}_a} (u_{kj} + v_{kj}) \\
 &\text{subject to} \\
 &Z_{1:d, 1:d} = I_d \\
 &(0; e_i - e_j)^T Z (0; e_i - e_j) - u_{ij} + v_{ij} = \delta_{ij}^2, \quad (i, j) \in \mathcal{I}_x \\
 &(a_k; -e_j)^T Z (a_k; -e_j) - u_{kj} + v_{kj} = \bar{\delta}_{kj}^2, \quad (k, j) \in \mathcal{I}_a \\
 &Z \succcurlyeq 0 \\
 &u_{ij}, v_{ij} \geq 0, \quad (i, j) \in \mathcal{I}_x, \quad u_{kj}, v_{kj} \geq 0, \quad (k, j) \in \mathcal{I}_a
 \end{aligned} \tag{25}$$

is called the *full SDP relaxation* (FSDP) of (23). It has been shown by So and Ye [30] that for certain ‘good’ problems with no data noise this relaxation is exact.

For larger sensor network localization problems, the FSDP relaxation is difficult to solve numerically. The SDP problem has a large number of variables and the constraint matrix is thus *large* and *full*. To solve the problem, one may exploit the sparsity of  $\mathcal{I}_x$  and  $\mathcal{I}_a$  at the relaxation modelling level. Several approaches have been published on this subject. A simple, yet powerful approach was proposed by Wang et al. [35] and called *edge-based relaxation* (ESDP). However, ESDP does not maintain the localizability of FSDP: the solution can have high rank even for uniquely localizable problems. For problems with no data noise, Krislock and Wolkowicz [21] proposed a very efficient algorithm based on facial reductions. This approach, however, cannot be extended to the problems with noisy data.

As mentioned above, for many noiseless problems the relaxation is exact, i.e. the rank of the matrix  $Z$  is 2. Then, for problems with small noise,  $Z$  is expected to have two large eigenvalues and several, perhaps many, small nonzero ones. The problem thus satisfies our low-rank Assumption 2.5 and can be efficiently solved by Loraine. This will be demonstrated in Section 9.

## 8. Application 3: Lasserre relaxations of the MAXCUT problem

### 8.1. The problem

Let  $\Gamma$  be an undirected  $n$ -node graph and let the arcs  $(i, j)$  be associated with nonnegative weights  $a_{ij}$ . The task is to find a cut of the largest weight, that is, to partition the set of nodes into two parts,  $S$  and  $S'$  such that the total weight of all arcs linking  $S$  and  $S'$  is as large as possible.

The MAXCUT problem is formulated as a quadratic optimization problem

$$\max_x \left\{ \frac{1}{4} \sum_{i,j=1}^n a_{ij}(1 - x_i x_j) \mid x_i^2 = 1, i = 1, \dots, n \right\} \quad (26)$$

or, equivalently, with  $X = xx^T$ , as a linear SDP with a rank-one constraint:

$$\max_X \left\{ \frac{1}{4} \sum_{i,j=1}^n a_{ij}(1 - X_{ij}) \mid X_{ii} = 1, i = 1, \dots, n; \text{rank } X = 1; X \succeq 0 \right\}. \quad (27)$$

It is well known that problem (26) is NP-hard. The celebrated result by Goemans and Williamson [12] shows that the (Shor's) relaxation of (27) by ignoring the rank constraints will deliver a solution with objective function not bigger than  $\frac{1}{0.87865}$  times the global optimum. The relaxation is, however, almost never exact which means that the solution  $X^*$  of the relaxed (27) has, typically, an unknown rank bigger than 1.

Tighter approximations with low-rank solutions can be obtained by higher order relaxations, introduced by Lasserre [22]. The original problem (26) is a polynomial optimization problem and we can just use the Lasserre machinery to obtain tight approximations of its global solution. It was shown by Fawzi et al. [11] that for this type of problems, the sequence of these approximations is *finite* and the upper bound on the order of the relaxation to obtain exact solution of (26) is  $\lceil n/2 \rceil$ . Laurent [23] showed that this is also a lower bound for unweighted complete graphs.

The SDP relaxations can be written in the following form:

$$\begin{aligned} & \min_{y \in \mathbb{R}^s} y^\top q \\ & \text{subject to} \quad \sum_{i=1}^s M_i y_i + I \succcurlyeq 0. \end{aligned} \quad (28)$$

Here, for the relaxation of order 1,  $Q$  is the Laplacian matrix of the graph,  $q = \text{svec}(Q)$ ,  $y = \text{svec}(X)$ ,  $s = n(n+1)/2$ , and  $M_i \in \mathbb{R}^{n+1 \times n+1}$  are the (pseudo-)Hankel matrices; in this case (28) is just re-writing of the relaxed problem (27) (without the rank constraint). For higher-order relaxations, the dimensions  $s$  and  $m$  get bigger by adding higher-order terms in  $M_i$  and  $y$ ; for details, see [22].

For an exact relaxation (i.e. relaxation delivering the global solution of (26)), the rank of the optimal moment matrix  $M^* := \sum_{i=1}^s M_i y_i^* + I$  is equal to the number of global solutions; in particular, if the global solution is unique (up to the multiple by -1), the rank of  $M^*$  is 2. So, while problem (28) has a low-rank solution, it is in the 'wrong' form for our

IP solver. While the solution  $M^*$  of (28) is of low rank, our solver expects the solution of an SDP problem in the *primal form* (1) to be of low rank. In [13], we show that the dual to (28) can be rewritten in the dual form

$$\begin{aligned} \min_{z \in \mathbb{R}^{\tilde{n}}} \quad & (\text{svec}(I))^{\top} z \\ \text{subject to} \quad & \text{smat}(z) \succcurlyeq 0 \\ & \mathbf{M}z = \tilde{q}, \end{aligned} \tag{29}$$

where  $\tilde{n} = m(m+1)/2$  and  $\mathbf{M} = (\text{svec}(M_1), \dots, \text{svec}(M_s))^T$ ,  $\mathbf{M} \in \mathbb{R}^{s \times \tilde{n}}$ . Now, due to complementarity, we know that the dual solution to this problem (the Lagrangian multiplier to the constraint  $\text{smat}(z) \succcurlyeq 0$  and the solution to (28)) is of low rank, assuming high enough relaxation order and unique solution of (26). Also in [13], we show how to treat the equality constraints in (29) in the interior point algorithm; in particular, we use the  $\ell_1$ -penalty method for this purpose.

Problem (29) now satisfies the assumptions needed for the low-rank preconditioner.

## 9. Numerical experiments

### 9.1. Problem database

To test Loraine and the underlying algorithms, we generated a library of problems arising from truss topology optimization, sensor network localization and Lasserre relaxations of the MAXCUT problem. These problems are characterized by very low-rank solutions and scalability, in the sense that one can generate a range of problems of various dimensions but of the same type.

#### 9.1.1. TTO problems

We generated a set of truss topology optimization problems of various sizes, both with and without the vibration constraint. All problems have the same geometry, boundary conditions and loads and only differ in the number of potential nodes and bars. The geometry and loading for TTO problems without vibration (formulation 19) are as shown in Figure 4 (left), while the data for problems with the vibration constraint (formulation 22) differ only in the horizontal orientation of the load vector. We consider two groups of problems with the following naming convention:


- tru**<**n**> standard TTO problem (19) with  $\underline{t} = 0$ , discretized by  $n \times n$  nodes;
- vib**<**n**> same as above but with the vibration constraint (22).

In each group, all nodes in the initial ground structure are connected by potential bars. Table 2 presents the dimensions of the generated problems.

For illustration, Figure 4 shows optimal results for problems `tru25` and `vib19`.

#### 9.1.2. SNL problems

We consider SNL problems of growing dimension with nine anchors and  $n$  sensors randomly distributed around the letters O and B, see Figure 3. The radio range  $\rho$  (see the beginning of Section 7) was set to  $\frac{1}{5}$  of the maximal vertical distance of the anchors. The

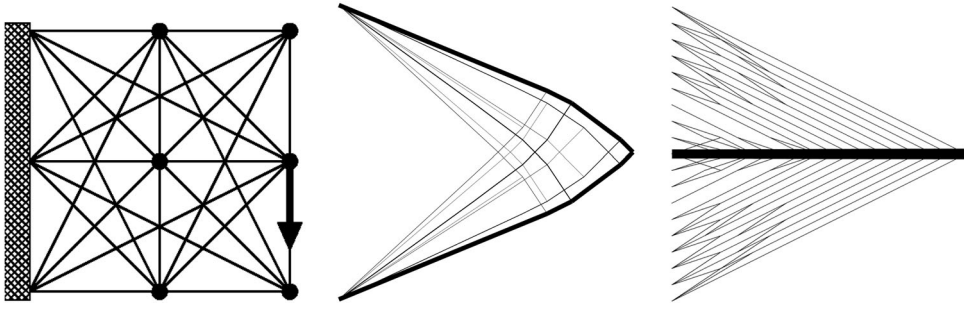

**Figure 4.** Initial design for  $\text{tru}^*$  problems (left); optimal results for problems  $\text{tru}25$  (middle) and  $\text{vib}19$  (right).

**Table 2.** Problems  $\text{tru} < n >$  and problems  $\text{vib} < n >$ , number of variables  $n$ , size of the LMI constraint  $m$  and number of linear constraints.

| Problem        | $n$     | $m$          | Lin. constr. |
|----------------|---------|--------------|--------------|
| $\text{tru}3$  | 36      | 13           | 72           |
| $\text{tru}5$  | 300     | 41           | 600          |
| $\text{tru}7$  | 1176    | 85           | 2352         |
| $\text{tru}9$  | 3240    | 145          | 6480         |
| $\text{tru}11$ | 7260    | 221          | 14,520       |
| $\text{tru}13$ | 14,196  | 313          | 28,392       |
| $\text{tru}15$ | 25,200  | 421          | 50,400       |
| $\text{tru}17$ | 41,616  | 545          | 83,232       |
| $\text{tru}19$ | 64,980  | 685          | 129,960      |
| $\text{tru}21$ | 97,020  | 841          | 194,040      |
| $\text{tru}23$ | 139,656 | 1013         | 279,312      |
| $\text{tru}25$ | 195,000 | 1201         | 390,000      |
| $\text{vib}3$  | 36      | (13, 12)     | 72           |
| $\text{vib}5$  | 300     | (41, 40)     | 600          |
| $\text{vib}7$  | 1176    | (85, 84)     | 2352         |
| $\text{vib}9$  | 3240    | (145, 144)   | 6480         |
| $\text{vib}11$ | 7260    | (221, 220)   | 14,520       |
| $\text{vib}13$ | 14,196  | (313, 312)   | 28,392       |
| $\text{vib}15$ | 25,200  | (421, 420)   | 50,400       |
| $\text{vib}17$ | 41,616  | (545, 544)   | 83,232       |
| $\text{vib}19$ | 64,980  | (685, 684)   | 129,960      |
| $\text{vib}21$ | 97,020  | (841, 840)   | 194,040      |
| $\text{vib}23$ | 139,656 | (1013, 1012) | 279,312      |
| $\text{vib}25$ | 195,000 | (1201, 1200) | 390,000      |

known distances between the sensors were perturbed by 1% Gaussian noise. Table 3 (left) shows the dimensions of the generated problems.

### 9.1.3. MAXCUT problems

Recall that the solution of the MAXCUT problem is of rank 1 only if the problem has a unique global solution. Obviously, a complete unweighted graph may have many ‘symmetric’ solutions. To avoid the non-uniqueness, we generated undirected, weighted, generally complete graphs with weights randomly distributed between 0 and 12 with 20–50 nodes, using the MATLAB command `graph`. It turned out that for all these problems the relaxation order 2 in the Lasserre hierarchy is already high enough to deliver the



**Table 3.** Problems SNL-  $\langle n \rangle$  and MAXCUT-  $\langle n \rangle$ , number of variables  $n$ , size of the LMI constraint  $m$  and number of linear constraints.

| Problem   | $n$     | $m$  | Lin. constr. |
|-----------|---------|------|--------------|
| SNL-16    | 1677    | 130  | 3348         |
| SNL-32    | 6818    | 258  | 13,630       |
| SNL-48    | 14,886  | 386  | 29,766       |
| SNL-64    | 26,767  | 514  | 53,528       |
| SNL-80    | 40,840  | 642  | 81,674       |
| SNL-96    | 58,956  | 770  | 117,906      |
| SNL-112   | 82,137  | 898  | 164,268      |
| SNL-128   | 109,464 | 1026 | 218,922      |
| MAXCUT-20 | 22,366  | 211  | 12,390       |
| MAXCUT-25 | 53,301  | 326  | 30,550       |
| MAXCUT-30 | 108,811 | 466  | 63,860       |
| MAXCUT-35 | 199,396 | 631  | 119,070      |
| MAXCUT-40 | 337,431 | 821  | 204,180      |
| MAXCUT-45 | 537,166 | 1036 | 328,440      |
| MAXCUT-50 | 814,726 | 1276 | 502,350      |

optimal solution of the MAXCUT problem. The dimensions of the corresponding SDP problems (29) (for relaxation order 2) are shown in Table 3 (right).

## 9.2. Other problems, standard libraries

While we tested our software for other problems from standard libraries, we do not report it here for one of the following reasons:

- (1) The available collections, such as SDPLIB [7], are not representative enough in the sense that they do not include enough problems of the same type. We did not want to pick up single problems.
- (2) Loraine mainly benefits from the use of an iterative solver for the linear system using a specific preconditioner targeted to problems with low-rank solutions. For many such problems, however, no preconditioner is needed for the convergence of the iterative method; these ‘easy’ problems were not included in our testing. This is the case of matrix completion problems [3,40] or some problems arising in the relaxation of combinatorial optimization. It is *not* the case of problems from Section 9; for those, the preconditioner is essential for convergence.
- (3) The problems do not satisfy our dimensional assumption  $n \gg m$ . For these problems, the preconditioner is still very efficient (assuming low-rank solutions) but the use of iterative methods does not bring any significant advantage to direct solvers. This is the case of many problems found in SDPLIB.

## 9.3. Loraine setting

The algorithms presented in this article were implemented in MATLAB and Julia codes. The codes use DIMACS stopping criteria [26] with  $\varepsilon_{\text{DIMACS}} = 10^{-5}$ .

The stopping parameter for the iterative method  $\varepsilon_{\text{CG}}$  in Algorithm ?? is set and updated as follows: we start with  $\varepsilon_{\text{CG}} = 0.01$  and multiply it after every major iteration by 0.5,

until it reaches the value  $10^{-6}$ ; then we continue with this value till convergence of the IP algorithm.

Loraine can use either CG or MINRES solver with the selected preconditioner. In the numerical experiments reported below, we solely used MINRES. While a single CG iteration is faster, MINRES proved to be more robust when approaching the problem solution, i.e. when the matrices get increasingly ill-conditioned.

Unless stated otherwise, we use the following hybrid preconditioner called  $H_{\text{hyb}}$ : we start with  $H_\beta$  (16) until the criterion below is satisfied and then switch to  $H_\alpha$  (13):

$$N_{\text{cg\_iter}} > kp\sqrt{n}/10 \ \& \ N_{\text{iter}} > \sqrt{n}/60.$$

Here  $N_{\text{iter}}$  is the current IP iteration and  $N_{\text{cg\_iter}}$  the number of CG or MINRES steps needed to solve the corrector equation in this iteration. This criterion is, obviously, purely heuristic. The printout below, obtained for problem `tru15`, shows the iteration history around the preconditioner switch.

```
*** IP STARTS
it      obj          error    cg_iter  CPU/it
1   1.46116856e+04  5.04e+04    12     0.16
2   5.75293981e+04  3.66e+04     6     0.15

...
19  1.38827049e-01  3.00e-01    28     0.24
20  1.37941865e-01  2.92e-01    31     0.23
Switching to preconditioner 1
21  1.09821166e-01  2.31e-01    16     0.26
22  1.10288854e-01  2.26e-01    15     0.26

...
52  5.93380311e-02  1.76e-06    46     0.55
53  5.93379029e-02  7.57e-07    66     0.76
*** Total CG iterations:    896
```

We further choose the value of  $\tau$  in  $H_\alpha$  and  $H_\beta$  as

$$\tau = \lambda_1(W_i) + 0.5 \text{mean}(\lambda_1(W_i), \dots, \lambda_{m-k_i}(W_i)).$$

To solve the problems, we used the default setting of Loraine parameters as shown in Section 5, with the following exceptions, as explained in the respective paragraphs below:

**SNL:** `tol_cg = 1e-1`, `eDIMACS = 1e-4`, `erank = 12`, `initpoint = 1`  
**MAXCUT:** `eDIMACS = 1e-5`

#### 9.4. Other software

Later in this section, we present results obtained by Loraine, together with (sometimes brief) comparison with other SDP software. For this comparison, we use the solver

**Table 4.** Loraine in `tru<n>` and `vib<n>` problems.

| Problem | Loraine<br>Iter | MINRES<br>Iter | Time | Time/Iter |
|---------|-----------------|----------------|------|-----------|
| tru3    | 16              | 122            | 0.01 | 0.00      |
| tru5    | 21              | 190            | 0.08 | 0.00      |
| tru7    | 27              | 236            | 0.24 | 0.01      |
| tru9    | 31              | 333            | 0.65 | 0.02      |
| tru11   | 36              | 370            | 1.6  | 0.04      |
| tru13   | 45              | 500            | 4.5  | 0.10      |
| tru15   | 52              | 882            | 11   | 0.22      |
| tru17   | 53              | 980            | 24   | 0.45      |
| tru19   | 64              | 1310           | 51   | 0.80      |
| tru21   | 65              | 1325           | 84   | 1.29      |
| tru23   | 72              | 2450           | 189  | 2.63      |
| tru25   | 87              | 2148           | 317  | 3.64      |
| vib3    | 20              | 209            | 0.04 | 0.00      |
| vib5    | 31              | 411            | 0.21 | 0.01      |
| vib7    | 39              | 501            | 0.67 | 0.02      |
| vib9    | 47              | 663            | 2.2  | 0.05      |
| vib11   | 59              | 995            | 6.1  | 0.10      |
| vib13   | 69              | 1153           | 16   | 0.23      |
| vib15   | 80              | 1480           | 37   | 0.46      |
| vib17   | 94              | 1781           | 92   | 0.98      |
| vib19   | 108             | 2116           | 189  | 1.75      |
| vib21   | 120             | 2844           | 401  | 3.34      |
| vib23   | 130             | 2720           | 718  | 5.52      |
| vib25   | 143             | 3752           | 1321 | 9.24      |

MOSEK [27] which is also based on an interior-point algorithm. While this comparison may seem unfair, as MOSEK uses a direct solver to solve the linear systems, we believe that it gives a good perspective of the clear advantage of iterative solvers with good preconditioners, when available and when applicable. We further present a comparison with our MATLAB implementation of the ADMM method, based on [36].


For the truss problems, we also offer a comparison with SDPNAL+ [37], an implementation of the semi-smooth Newton-CG augmented Lagrangian method; and SDPLR [8] using a nonlinear programming algorithm based on low-rank factorization of the variables.

## 9.5. Numerical results

All problems in this section were solved on an iMac desktop computer with 3.6 GHz 8-Core Intel Core i9 and 64 GB 2667 MHz DDR4 using MATLAB R2022b. The ‘time’ in the following tables is the elapsed time reported either by Matlab `tic/toc` commands (for Loraine and ADMM) or by the software (for MOSEK, SDPNAL+ and SDPLR).

### 9.5.1. Truss topology problem

**Loraine with iterative solver.** We now present results for all `tru` and `vib` problems using Loraine. These are shown in Table 4. The table presents the number of iterations of Loraine and the total number of MINRES iterations using the hybrid preconditioner  $H_{\text{hyb}}$ . This is followed by time spent in the optimization solver and time per iteration. Note that Loraine solves two linear systems per iteration (predictor and corrector). For all problems, we set the expected rank of the dual solutions  $k = 1$ .

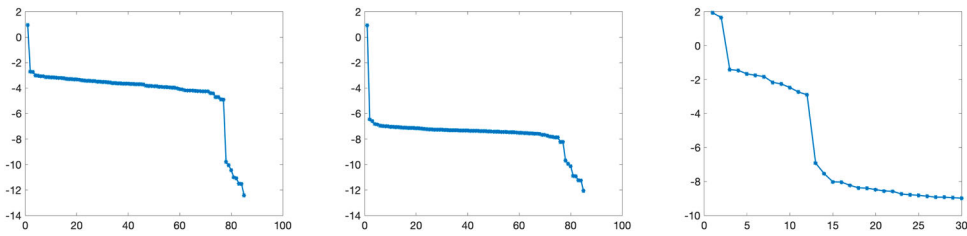

**Figure 5.** Left to right: Eigenvalues of the solution matrix  $X^*$ , as computed by Loraine, for problems  $\text{tru7}$ ,  $\text{tru7e}$  (i.e.  $\text{tru7}$  with  $\underline{t} \geq \varepsilon > 0$ , not included in Table 4) and SNL48.

**Table 5.** Loraine direct and other solvers in  $\text{tru} < n >$  problems.


| Problem | Loraine direct |      |           | MOSEK |      |           | SDPNAL+ |      | SDPLR |      |
|---------|----------------|------|-----------|-------|------|-----------|---------|------|-------|------|
|         | Iter           | Time | Time/Iter | Iter  | Time | Time/Iter | Iter    | Time | Iter  | Time |
| tru3    | 16             | 0.01 | 0.001     | 14    | 0.22 | 0.02      | 440     | 0.5  | 15    | 0.01 |
| tru5    | 21             | 0.09 | 0.004     | 15    | 0.23 | 0.02      | 9674    | 29   | 18    | 1.7  |
| tru7    | 27             | 0.46 | 0.02      | 17    | 0.78 | 0.05      | 6324    | 55   | 19    | 21   |
| tru9    | 31             | 4.3  | 0.14      | 20    | 5.6  | 0.28      | 47,579  | 468  | 20    | 179  |
| tru11   | 36             | 31   | 0.86      | 26    | 44   | 1.69      | maxit   |      | 22    | 2469 |
| tru13   | 45             | 239  | 5.31      | 29    | 235  | 8.10      |         |      | maxit |      |
| tru15   | 52             | 1216 | 23.38     | 32    | 1079 | 33.72     |         |      |       |      |
| tru17   | 51             | 4583 | 89.86     | 37    | 4671 | 126.24    |         |      |       |      |

As mentioned above, solutions  $X^*$  of the truss problems have one outlying eigenvalue but may not be of rank 1. This is demonstrated in Figure 5: the left graph shows eigenvalues of  $X^*$  (as obtained by Loraine with high accuracy) for  $\text{tru7}$  (with  $\underline{t} = 0$ ) with the single outlying eigenvalue and most of the remaining eigenvalues of magnitude  $10^{-4}$ . Compare it with the middle graph showing eigenvalues of  $X^*$  for  $\text{tru7e}$  with  $\underline{t} > 0$ ; this matrix, indeed, has numerical rank 1.

**Loraine with direct solver and rank-1 data.** Recall that Loraine is not only suitable for problems with low-rank solutions but also with low-rank data. The truss problems are well-suited for this branch of the code, as all the data matrices have rank 1, see (17).

Table 5 presents results of Loraine with *direct* solver and rank-1 input data, MOSEK, SDPNAL+ and SDPLR; we again give the number of iterations of the solver, CPU time and (for Loraine and MOSEK) CPU time per one iteration. While Loraine is much more efficient for these problems with an iterative solver, the goal of this comparison is to show that when handling the rank-1 data efficiently, we get a code that is (at least per one iteration) faster than other software even with a direct solver. To put things into perspective, Loraine direct (a purely Matlab code) needs 780 s to solve problem  $\text{tru13}$  when the data are treated as general matrices, with no rank information.

We only present results for problems  $\text{tru3}$ – $\text{tru17}$ ; for the larger problems MOSEK exceeded the available 64 GB RAM. SDPNAL+ and SDPLR were used with default stopping tolerance. None of these codes can solve problems bigger than  $\text{tru11}$  before reaching the maximum number of iterations. While Loraine solutions satisfy DIMACS criteria with  $10^{-5}$ , other codes often finish with lower precision. The ADMM is not included in this

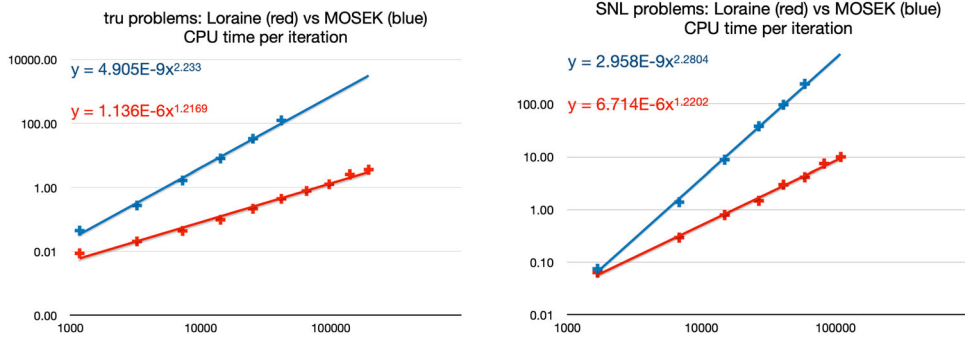

**Figure 6.** Loraine (red) and MOSEK (blue) in  $\text{tru}^*$  problems (left) and  $\text{SNL}^*$  problems (right). CPU time per iteration versus number of variables in log-log scale.

comparison as, even for the smallest problems, the method stagnated at a point far from the solution.

In Figure 6(left), we give a comparison of the CPU time per iteration for Loraine (iterative) and MOSEK. While MOSEK actually exceeds the theoretical complexity with coefficient 2.2, the complexity of Loraine is almost linear for these problems.

### 9.5.2. Sensor network localization problems

Recall from Section 7 that problems with noisy data lead to optimal solution  $Z^*$  of (25) with two outlying and a number of small, nonzero eigenvalues. Selecting  $k = 2$  therefore did not lead to an efficient preconditioner and we had to increase the estimate of the rank of  $Z^*$ . For the problems we solved,  $k = 12$  turned out to be a good compromise between the quality of the preconditioner and the CPU time needed to apply it. See also Figure 5 (right), showing the first 30 eigenvalues of the optimal matrix  $X^*$  obtained by Loraine; we can clearly see two distinct eigenvalues and another 10 eigenvalues of magnitude  $10^{-2}$ , with the rest of the eigenvalues converging to zero. Due to ill-conditioning of the problems, we relaxed the stopping criterion to  $\epsilon_{\text{DIMACS}} = 1e-4$ ; the same criterion was used for the ADMM code.

Table 6 presents the results for Loraine, MOSEK and ADMM. While ADMM turned out to be more successful than for the truss problems, it is still much slower than the two IP codes. In this table, the number of MINRES iterations sums up the iterations with preconditioners  $H_\beta$  and  $H_\alpha$ . For instance, in problem  $\text{SNL}-64$ , the average number of

**Table 6.** Loraine, MOSEK and ADMM in  $\text{SNL}-\langle n \rangle$  problems.

|         | Loraine |             |      | MOSEK  |      | ADMM   |          |
|---------|---------|-------------|------|--------|------|--------|----------|
| Problem | Iter    | MINRES iter | Time | Iter   | Time | Iter   | Time     |
| SNL-16  | 21      | 395         | 1.4  | 13     | 1.0  | 6239   | 12       |
| SNL-32  | 25      | 532         | 7.4  | 15     | 21   | 19,343 | 362      |
| SNL-48  | 27      | 676         | 21   | 17     | 150  | 14,328 | 1050     |
| SNL-64  | 27      | 705         | 40   | 16     | 611  | 81,938 | 17,554   |
| SNL-80  | 28      | 1064        | 84   | 21     | 2052 | time   | > 50,000 |
| SNL-96  | 29      | 969         | 120  | 27     | 6579 |        |          |
| SNL-112 | 30      | 1293        | 224  | memory |      |        |          |
| SNL-128 | 30      | 1316        | 299  |        |      |        |          |

```

*** Loraine v0.1 ***
Number of variables: 40839      Preconditioner      :      4
Matrix size(s)      :      642    Expected rank      :      12
Linear constraints : 81674
it      obj      error      cg_iter time/iter
1    4.37357010e+02  3.32e+05      4      0.34
2    4.79694156e+02  7.79e+04      4      0.40
3    4.75844194e+02  8.44e+03     38      0.81
...
9    1.64854663e+00  7.24e+02     45      0.71
10   -4.55049809e+00  1.73e+02     69      0.91
11   -1.14083700e+01  2.25e+01    112      1.23
Switching to preconditioner 1
12   -1.95288379e+01  8.02e+00     14      2.74
13   -2.43383931e+01  4.02e+00     13      2.65
14   -2.97196245e+01  2.32e+00     14      2.70
...
25   -4.17128514e+01  1.71e-03     40      4.61
26   -4.17274123e+01  6.84e-04     58      5.95
27   -4.17345508e+01  2.33e-04     81      7.67
28   -4.17372049e+01  7.21e-05    111      9.71
*** Total CG iterations:      1064
*** Total CPU time:      80.70 seconds

```

**Figure 7.** Problem SNL-80 solved using the hybrid preconditioner.

MINRES iterations with  $H_\alpha$  was 10 and the maximal number (in the last IP iteration) was 23.

In Figure 6(right), we give a comparison of the CPU time per iteration for Loraine and MOSEK.

For these problems, we also demonstrate the usefulness of the hybrid preconditioner (see Sections 4 and 9.3). Figure 7 shows the iteration log for problem SNL-80; the first IP iterations are solved using  $H_\beta$ ; once it requires too many MINRES iterations, we switch to  $H_\alpha$ .

**Table 7.** Loraine, MOSEK and ADMM in MAXCUT-  $< n >$  problems.

| Problem   | Loraine |             |      | MOSEK  |      | ADMM |      |
|-----------|---------|-------------|------|--------|------|------|------|
|           | Iter    | MINRES iter | Time | Iter   | Time | Iter | Time |
| MAXCUT-20 | 18      | 559         | 3.8  | 6      | 9    | 3486 | 15   |
| MAXCUT-25 | 20      | 728         | 11   | 7      | 78   | 4314 | 45   |
| MAXCUT-30 | 21      | 1032        | 28   | 9      | 607  | 4837 | 105  |
| MAXCUT-35 | 23      | 2183        | 96   | 9      | 2911 | 3030 | 126  |
| MAXCUT-40 | 27      | 2275        | 186  | memory |      | 1280 | 92   |
| MAXCUT-45 | 25      | 2521        | 335  |        |      | 7976 | 1034 |
| MAXCUT-50 | 24      | 2540        | 528  |        |      | 8783 | 1832 |

### 9.5.3. MAXCUT problems

The results obtained for the MAXCUT problems are summarized in Table 7. These problems are relatively ‘simple’: the ADMM method is rather efficient now (this is well known from other studies) and MOSEK converges in a very small number of iterations. However, the sheer size prevents MOSEK with a direct solver to solve larger problems, while ADMM is still about three times slower than Loraine. Moreover, the ADMM behaviour is rather unpredictable, regarding the number of iterations.

## 10. Conclusion

We have introduced new software Loraine for linear semidefinite optimization, particularly – but not exclusively – focused on problems with either low-rank solutions or low-rank data (or both). We have demonstrated Loraine’s efficiency in solving three classes of well-known SDP problems. While our primary emphasis in these tests was on problems with low-rank solutions, we have also shown that the solely Matlab version of Loraine is competitive and may even outperform the recently most efficient SDP solvers when solving problems with low-rank data. The software is distributed as open source and is written in standard Matlab or Julia, allowing users to easily adapt it to their specific needs.

### Note

1. [github.com/kocvara/Loraine.m](https://github.com/kocvara/Loraine.m)

## Acknowledgments

The authors would like to thank three anonymous referees for their valuable comments.

## Disclosure statement

No potential conflict of interest was reported by the author(s).

## Funding

This work has been supported by European Union’s Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie Actions, grant agreement 813211 (POEMA). The second author has been partly supported by the Czech Science Foundation through project No. 22-15524S.

## Notes on contributors

**Soodeh Habibi** is a Ph.D. candidate in Applied Mathematics at the University of Birmingham, UK, specializing in Optimization. Her doctoral research, funded by the Marie Skłodowska-Curie actions (MSCA), has led to the development of a semidefinite solver, which forms the integral part of her forthcoming Ph.D. thesis, titled ‘Algorithms and Software for Structured Semidefinite Optimization’.

**Michal Kočvara** is a Professor in Mathematical Optimization at the University of Birmingham, UK, and a senior researcher at the Academy of Sciences of the Czech Republic. He (co-)authored a monograph and over 50 journal articles on various aspects of mathematical optimization and optimization

of mechanical structures. He co-developed several computer programs for nonlinear and semidefinite optimization and optimization of elastic structures. His work has been supported by several EU grants.

*Michael Stingl* is a Professor in Applied Mathematics at the Freidrich–Alexander–Universität Erlangen–Nürnberg in Germany. His main research interest is in algorithmic optimization with a particular focus on applications arising in the context of material and topology optimization. Up to now he (co-)authored about 80 publications. His work has been supported by several DFG and EU grants.

## References

- [1] W. Achtziger and M. Kočvara, *On the maximization of the fundamental eigenvalue in topology optimization*, Struct. Multidiscipl. Optim. 34 (2007), pp. 181–195.
- [2] W. Achtziger and M. Kočvara, *Structural topology optimization with eigenvalues*, SIAM J. Optim. 18 (2008), pp. 1129–1164.
- [3] S. Bellavia, J. Gondzio, and M. Porcelli, *A relaxed interior point method for low-rank semidefinite programming problems with applications to matrix completion*, J. Sci. Comput. 89 (2021), pp. 1–36.
- [4] S.J. Benson, Y. Ye, and X. Zhang, *Solving large-scale sparse semidefinite programs for combinatorial optimization*, SIAM J. Optim. 10 (2000), pp. 443–461.
- [5] P. Biswas and Y. Ye, *Semidefinite programming for ad hoc wireless sensor network localization*, in *Proceedings of the 3rd international symposium on Information processing in sensor networks*, Berkeley, CA, USA, 2004, pp. 46–54.
- [6] P. Biswas, T.C. Liang, K.C. Toh, Y. Ye, and T.C. Wang, *Semidefinite programming approaches for sensor network localization with noisy distance measurements*, IEEE Trans. Autom. Sci. Eng. 3 (2006), pp. 360–371.
- [7] B. Borchers, *SDPLIB 1.2, a library of semidefinite programming test problems*, Optim. Methods Softw. 11 (1999), pp. 683–690.
- [8] S. Burer and R. Monteiro, *A nonlinear programming algorithm for solving semidefinite programs via low-rank factorization*, Math. Program. 95 (2003), pp. 329–357.
- [9] S. Burer and R. Monteiro, *Local minima and convergence in low-rank semidefinite programming*, Math. Program. 103 (2005), pp. 427–444.
- [10] E.J. Candès and T. Tao, *The power of convex relaxation: Near-optimal matrix completion*, IEEE Transactions on Information Theory 56 (2010), pp. 2053–2080.
- [11] H. Fawzi, J. Saunderson, and P.A. Parrilo, *Sparse sums of squares on finite abelian groups and improved semidefinite lifts*, Math. Program. 160 (2016), pp. 149–191.
- [12] M.X. Goemans and D.P. Williamson, *Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming*, J. ACM 42 (1995), pp. 1115–1145.
- [13] S. Habibi, M. Kočvara, and M. Stingl, *An interior-point method for Lasserre relaxations of unconstrained binary quadratic optimization problems*, preprint (2022).
- [14] C. Helmberg and F. Rendl, *A spectral bundle method for semidefinite programming*, SIAM J. Optim. 10 (2000), pp. 673–696.
- [15] R.A. Horn and C.R. Johnson, *Topics in Matrix Analysis*, Cambridge University Press, 1991.
- [16] F. Jarre, M. Kočvara, and J. Zowe, *Optimal truss design by interior-point methods*, SIAM J. Optim. 8 (1998), pp. 1084–1107.
- [17] M. Journée, F. Bach, P.A. Absil, and R. Sepulchre, *Low-rank optimization on the cone of positive semidefinite matrices*, SIAM J. Optim. 20 (2010), pp. 2327–2351.
- [18] S. Kim, M. Kojima, M. Mevissen, and M. Yamashita, *Exploiting sparsity in linear and nonlinear matrix inequalities via positive semidefinite matrix completion*, Math. Program. 129 (2011), pp. 33–68.
- [19] M. Kočvara, *Decomposition of arrow type positive semidefinite matrices with application to topology optimization*, Math. Program. 190 (2020), pp. 1–30.



- [20] M. Kočvara and M. Stingl, *On the solution of large-scale SDP problems by the modified barrier method using iterative solvers*, Math. Program. 109 (2007), pp. 413–444.
- [21] N. Krislock and H. Wolkowicz, *Explicit sensor network localization using semidefinite representations and facial reductions*, SIAM J. Optim. 20 (2010), pp. 2679–2708.
- [22] J.B. Lasserre, *Moments, Positive Polynomials and Their Applications*, World Scientific, 2009.
- [23] M. Laurent, *Lower bound for the number of iterations in semidefinite hierarchies for the cut polytope*, Math. Oper. Res. 28 (2003), pp. 871–883.
- [24] R. Madani, A. Kalbat, and J. Lavaei, *ADMM for sparse semidefinite programming with applications to optimal power flow problem*, in 2015 54th IEEE Conference on Decision and Control (CDC), Osaka, Japan, 2015, pp. 5932–5939.
- [25] J. Malick, J. Povh, F. Rendl, and A. Wiegeler, *Regularization methods for semidefinite programming*, SIAM J. Optim. 20 (2009), pp. 336–356.
- [26] H.D. Mittelmann, *An independent benchmarking of SDP and SOCP solvers*, Math. Program. 95 (2003), pp. 407–430.
- [27] MOSEK ApS, *The MOSEK optimization toolbox for MATLAB manual. Version 9.0.* (2019). Available at <http://docs.mosek.com/9.0/toolbox/index.html>.
- [28] D.E. Oliveira, H. Wolkowicz, and Y. Xu, *ADMM for the SDP relaxation of the QAP*, Math. Program. Comput. 10 (2018), pp. 631–658.
- [29] F. Permenter and P. Parrilo, *Partial facial reduction: simplified, equivalent SDPs via approximations of the PSD cone*, Math. Program. 171 (2018), pp. 1–54.
- [30] A.M.C. So and Y. Ye, *Theory of semidefinite programming for sensor network localization*, Math. Program. 109 (2007), pp. 367–384.
- [31] M. Stingl, M. Kočvara, and G. Leugering, *A sequential convex semidefinite programming algorithm with an application to multiple-load free material optimization*, SIAM J. Optim. 20 (2009), pp. 130–155.
- [32] M.J. Todd, K.C. Toh, and R.H. Tütüncü, *On the Nesterov–Todd direction in semidefinite programming*, SIAM J. Optim. 8 (1998), pp. 769–796.
- [33] K.C. Toh, *Solving large scale semidefinite programs via an iterative solver on the augmented systems*, SIAM J. Optim. 14 (2004), pp. 670–698.
- [34] K.C. Toh and M. Kojima, *Solving some large scale semidefinite programs via the conjugate residual method*, SIAM J. Optim. 12 (2002), pp. 669–691.
- [35] Z. Wang, S. Zheng, Y. Ye, and S. Boyd, *Further relaxations of the semidefinite programming approach to sensor network localization*, SIAM J. Optim. 19 (2008), pp. 655–673.
- [36] Z. Wen, D. Goldfarb, and W. Yin, *Alternating direction augmented lagrangian methods for semidefinite programming*, Math. Program. Comput. 2 (2010), pp. 203–230.
- [37] L. Yang, D. Sun, and K.C. Toh, *SDPNAL+: a majorized semismooth Newton-CG augmented Lagrangian method for semidefinite programming with nonnegative constraints*, Math. Program. Comput. 7 (2015), pp. 331–366.
- [38] A. Yurtsever, J.A. Tropp, O. Fercoq, M. Udell, and V. Cevher, *Scalable semidefinite programming*, SIAM J. Math. Data Sci. 3 (2021), pp. 171–200.
- [39] Y. Zhang, *On extending some primal–dual interior-point algorithms from linear programming to semidefinite programming*, SIAM J. Optim. 8 (1998), pp. 365–386.
- [40] R.Y. Zhang and J. Lavaei, *Modified interior-point method for large-and-sparse low-rank semidefinite programs*, in 2017 IEEE 56th Annual Conference on Decision and Control (CDC), Melbourne, Australia (2017). <http://dx.doi.org/10.1109/CDC.2017.8264510>.
- [41] X.Y. Zhao, D. Sun, and K.C. Toh, *A Newton-CG augmented lagrangian method for semidefinite programming*, SIAM J. Optim. 20 (2010), pp. 1737–1765.
- [42] Y. Zhu, G. Pataki, and Q. Tran-Dinh, *Sieve-SDP: a simple facial reduction algorithm to preprocess semidefinite programs*, Math. Program. Comput. 11 (2019), pp. 503–586.